

# Chronos 2 electronic timers - 17.5 mm



- Multi-function or mono-function
- Multi-range (7 ranges, available options)
- Multi-voltage
- SPDT relay output: 10A - 250V
- Screw or spring terminals
- 1 LED status indicator
- Option of connecting a small cord to the control input
- 3-wire sensor control option

## Technical specifications

Timing	
Repetition accuracy (with constant parameters)	± 0.5 % (CEI 1812-1)
Drift	
- Temperature	± 0.05 % / °C
- Voltage	± 0.2 % / V
Display precision according to IEC 1812-1	±10 % / 25 °C
Minimum pulse duration	
- Typically (relay version)	30 ms
- Typically (solid state version)	50 ms
- Typically under load (relay version)	100 ms
Maximum reset time by de-energisation	
- Typically (relay version)	100 ms
- Typically (solid state version)	350 ms
Immunity to breaks in supply voltage: typically	>10 ms
Power supply	
Multi-voltage power supply	depending on version, see pages 6/2, 6/3
Frequency	50/60 Hz
Operating range	85 to 110 % Un (85 to 120 % Un for 12V AC/DC)
Load factor	100 %
Maximum power consumption	0.6 W 24V AC/DC 1.5 W 230V AC 32 VA 230V AC
Output elements relay output	
1 or 2 changeover relays, AgNi (cadmium-free)	2000 VA / 80 W
Rated power	2000 V A / 80W
Maximum breaking current	10 AAC 10 A DC
Minimum breaking current	10 mA / 5 VDC
Voltage breaking capacity	250V AC/VDC
Electrical life	10 <sup>5</sup> operations 8 A 250V resistive
Mechanical life	5 x 10 <sup>6</sup> operations
Breakdown voltage acc. to IEC 1812-1	2.5 kV / 1min / 1 mA / 50Hz
Impulse voltage acc. to IEC 664-1 IEC 1812-1	5 kV, wave 1.2 / 50 µs
Display	
State displayed by 1 LED	
- Flashing green when on	
Green LED operation indicator	
■■■■■ Pulsing:	
- timer on, no timing in progress (except functions Di-D and Li-L)	
■■■■■ Flashing:	
- timing in progress	
■■■■■ Permanently lit:	
- Relay waiting, no timing in progress	
Input type	
- Volt-free contact	
- 3-wire PNP output control option maximum residual voltage: 0.4 V whatever the timer power supply	0.4 V

## Other information

For special features, functions etc. please contact us.



Timing	0.1s • 100h	0.1s • 100h
Types		
Screw terminals	<b>MUR1</b>	<b>MAR1</b>
Spring terminals	—	—
Part numbers and voltage		
24V $\bar{\bar{=}}$ / 24 • 240V $\sim$	<b>88 826 105</b>	<b>88 826 115</b>
12V $\sim$ / $\bar{\bar{=}}$	—	—
12 • 240V $\sim$ / $\bar{\bar{=}}$	—	—
Functions		
	Multi-function	Bifunction
	A - At - B - C - H - Ht - Di - D - Ac - Bw	A - At
Nominal current		
	10 A	10 A
Timing ranges (7 ranges)		
	1s - 10 s - 1 min - 10 min - 1 h - 10 h - 100 h	


## General specifications

Conforming to standards IEC 1812-1, EN 50081-1/2, EN 50082-1/2, LV directives (73/23/EEC + 93/68/EEC (CE marking) + EMC (89/336/EEC + IEC 669-2-3 (17.5 mm)	
Approvals cUL listed UL listed CSA recognized	
Temperatures limits	
- use	-20 °C + 60 °C
- stored	-30 °C + 60 °C
Installation category (acc. to IEC 664-1)	Voltage surge category
Creepage distance and clearance acc. to IEC 664-1	4 kV / 3
Degree of protection acc. to IEC 529	
- terminal block	IP 20
- casing	IP 40
- front face (except Tk2R1)	IP 50
Vibration resistance acc. to IEC 68-2-6	f = 10 • 55 Hz A = 0.35 mm
Relative humidity acc. to IEC 68-2-3 without condensation	93 %
Electromagnetic compatibility	Level III (Air 8 K / Contact 6 KV)
- Immunity to electrostatic discharges acc. to IEC 1000-42	Level III 10V/m: 80 MHz to 1 GHz)
- Immunity to electrostatic fields acc. to ENV 50140/204 (IEC 1000-4-3)	Level III (direct 2kV/ Capacitive coupling clamp 1 KV)
- Immunity to rapid transient bursts acc. to IEC 1000-4-4	Level III (common mode 2 KV / residual current mode 1KV)
- Immunity to shock waves on power supply acc. to IEC 1000-4-5	Level III (10V rms: 0.15 MHz to 80 MHz)
- Immunity to radiofrequency in common mode acc. to ENV	30 % / 10 ms 60 % / 100 ms > 95 % / 5 s
- Immunity to voltage dips and breaks acc. to IEC 1000-4-11	
- Mains-borne and radiated emissions acc. to EN 55022 (EN 55011 Group 1)	Class B
Fixing: Symmetrical DIN rail (EN 50022)	35 mm
Connection capacity	
- without ferrule	2 x 2.5 mm <sup>2</sup>
- with ferrule	2 x 1.5 mm <sup>2</sup>
Spring terminals, 2 terminals per connection point	
- flexible wire	1.5 mm <sup>2</sup>
- rigid wire	2.5 mm <sup>2</sup>
Casing material	Self-extinguishing
Weight: 17.5 mm casing	60 g

Products and specifications subject to change without notice.

Consult factory for application assistance.













204 Airline Drive, Suite 300, Coppell, Texas 75019 / Tel: (800) 677-5311 / FAX: (800) 677-3865 / www.crouzet-usa.com

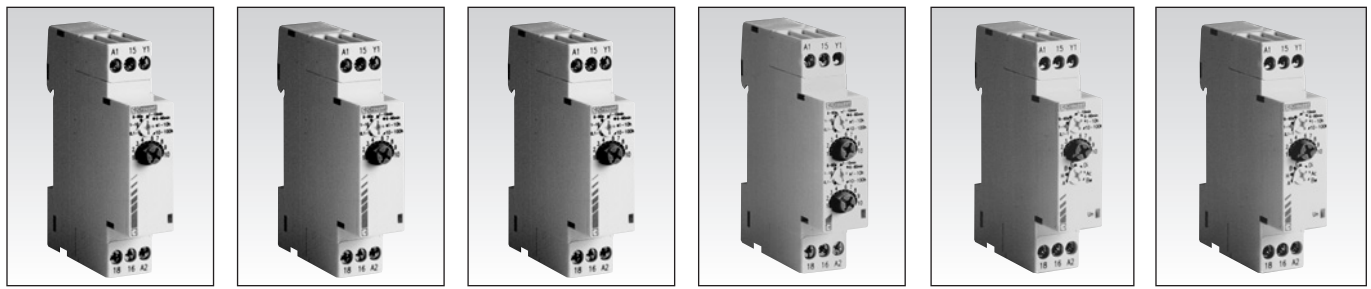


0.1s • 100h	0.1s • 100h	0.1s • 100h	0.1s • 100h	0.1s • 100h	0.1s • 100h
<b>MBR1</b>	<b>MCR1</b>	<b>MHR1</b>	<b>MLR1</b>	<b>MUR4</b>	<b>MUR3</b>
—	—	—	—	—	<b>MURc3</b>
<b>88 826 125</b>	<b>88 826 135</b>	<b>88 826 145</b>	<b>88 826 155</b>	—	—
—	—	—	—	<b>88 826 100</b>	—
Mono-function B	Mono-function C	Bifunction H - Ht	Bifunction Li - L	Multi-function A - At - B - C - H - Ht - Di - D - Ac - Bw	<b>88 826 103</b> <b>88 826 503</b> Multi-function A - At - B - C - H - Ht - Di - D - Ac - Bw
10 A	10 A	10 A	10 A	10 A	10 A

**4**


**Function diagrams**




**Connections (Y1 = C, Function diagrams)**

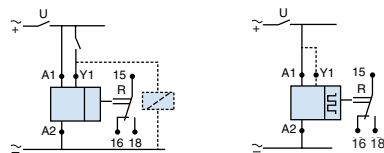

Functions:  
A - At / H - Ht / B / C  
Di - D / Ac / Bw



**Dimensions**

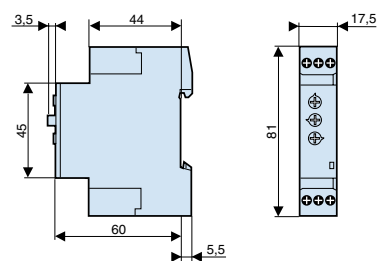

**To order, specify:**

**1** Type      **2** Part number  
Example: Chronos 2 Timers MUR1 88 826 105

Products and specifications subject to change without notice.  
Consult factory for application assistance.

# Chronos 2 electronic timers - 17.5 mm

## Solid state output

- Multi-function or mono-function
- Multi-range (7 ranges, available options)
- Multi-voltage
- Solid state output: 0.7 A - 250 V (0.5 A UL)
- Screw or spring terminals
- 1 LED status indicator

## Technical specifications

Timing	
Repetition accuracy (with constant parameters)	± 0.5 % (CEI 1812-1)
Drift	
- Temperature	± 0.05 % / °C
- Voltage	± 0.2 % / V
Display precision according to IEC 1812-1	±10 % / 25 °C
Minimum pulse duration	
- Typically (relay version)	30 ms
- Typically (solid state version)	50 ms
- Typically under load (relay version)	100 ms
Maximum reset time by de-energisation	
- Typically (relay version)	100 ms
- Typically (solid state version)	350 ms
Immunity to breaks in supply voltage: typically	>10 ms
Power supply	
Multi-voltage power supply	depending on version, see page 6/5
Frequency	50/60 Hz
Operating range	85 to 110 % Un (85 to 120 % Un for 12V AC/DC)
Load factor	100 %
Maximum power consumption	0.6 W 24V AC/DC 1.5 W 230V AC 32 VA 230V AC
Output elements: Solid state output	
Rated power	0.7 A AC/DC 20 °C (0.5A UL)
Derating	5 mA / °C
Maximum admissible current	20 A ≤ 10 ms
Minimum breaking current	10 mA
Off-state leakage	< 5 mA
Voltage breaking capacity	250V AC/VDC
Maximum voltage drop at terminals	3 fils 4V - 2 fils 8V
Electrical life	10 <sup>8</sup> operations
Mechanical life	10 <sup>8</sup> operations
Breakdown voltage acc. to IEC 664, IEC 255-5	2.5 kV to 1 mA / 1 min.
Display	
State displayed by 1 LED	
- Flashing green when on	
Green LED operation indicator	
■■■■■ Pulsing:	
- timer on, no timing in progress (except functions Di-D and Li-L)	
■■■■■ Flashing:	
- timing in progress	
■■■■■ Permanently lit:	
- Relay waiting, no timing in progress	
Input type	
- Volt-free contact	
- 3-wire PNP output control option maximum residual voltage: 0.4 V whatever the timer power supply	

## Other information

For special features, functions etc. please contact us.

## Timing

### Types

### Part numbers and voltage

24 • 240 V ~ 50 • 60 Hz  
24 • 240 V ~ ∞ 50 • 60 Hz

### Functions

### Nominal current

### Timing ranges (7 ranges)

1s - 10 s - 1 min - 10 min - 1 h - 10 h - 100 h


## General specifications

Conforming to standards	
IEC 1812-1, EN 50081-1/2, EN 50082-1/2, LV directives (73/23/EEC + 93/68/EEC (CE marking) + EMC (89/336/EEC + IEC 669-2-3 (17.5 mm)	
Approvals	
UL cUL listed CSA recognized	
Temperatures limits	
- use	-20 °C + 60 °C
- stored	-30 °C + 60 °C
Installation category (acc. to IEC 664-1)	Voltage surge category
Creepage distance and clearance acc. to IEC 664-1	4 kV / 3
Degree of protection acc. to IEC 529	
- terminal block	IP 20
- casing	IP 40
- front face (except Tk2R1)	IP 50
Vibration resistance acc. to IEC 68-2-6	f = 10 • 55 Hz A = 0.35 mm
Relative humidity acc. to IEC 68-2-3 without condensation	
93 %	
Electromagnetic compatibility	
- Immunity to electrostatic discharges acc. to IEC 1000-42	
Level III (Air 8 K / Contact 6 KV)	
- Immunity to electrostatic fields acc. to ENV 50140/204 (IEC 1000-4-3)	
Level III 10V/m: 80 MHz to 1 GHz)	
- Immunity to rapid transient bursts acc. to IEC 1000-4-4	
Level III (direct 2kV/ Capacitive coupling clamp 1 KV)	
- Immunity to shock waves on power supply acc. to IEC 1000-4-5	
Level III (common mode 2 KV / residual current mode 1KV)	
- Immunity to radiofrequency in common mode acc. to ENV	
Level III (10V rms: 0.15 MHz to 80 MHz)	
- Immunity to voltage dips and breaks acc. to IEC 1000-4-11	
30 % / 10 ms 60 % / 100 ms > 95 % / 5 s	
- Mains-borne and radiated emissions acc. to EN 55022 (EN 55011 Group 1)	
Class B	
Fixing: Symmetrical DIN rail (EN 50022)	
35 mm	
Connection capacity	
- without ferrule	2 x 2.5 mm <sup>2</sup>
- with ferrule	2 x 1.5 mm <sup>2</sup>
Spring terminals, 2 terminals per connection point	
- flexible wire	1.5 mm <sup>2</sup>
- rigid wire	2.5 mm <sup>2</sup>
Casing material	Self-extinguishing
Weight: 17.5 mm casing	60 g

Products and specifications subject to change without notice.













Consult factory for application assistance.

204 Airline Drive, Suite 300, Coppell, Texas 75019 / Tel: (800) 677-5311 / FAX: (800) 677-3865 / www.crouzet-usa.com

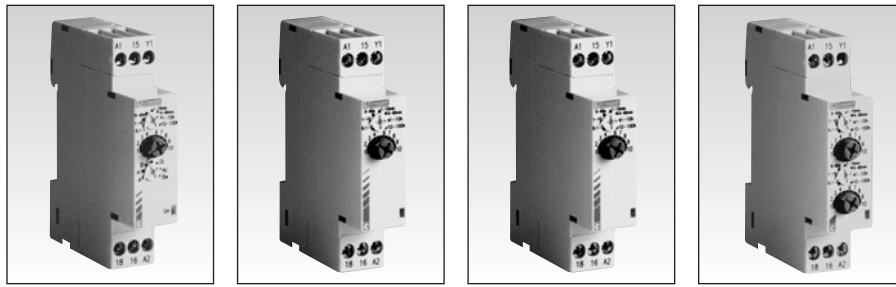


0.1s • 100h	0.1s • 100h	0.1s • 100h	0.1s • 100h
<b>MUS2</b>	<b>MAS5</b>	<b>MHS2</b>	<b>MLS2</b>
<b>1</b>			
<b>2</b>			
<b>88 826 004</b>	—	<b>88 826 044</b>	<b>88 826 054</b>
—	<b>88 826 014</b>	—	—
Multi-function A - At - B - C - H - Ht - Di - D - Ac - Bw	Mono-function A	Mono-function H	Bifunction Li - L
0.7 A, 0.5 A (UL)	0.7 A, 0.5 A (UL)	0.7 A, 0.5 A (UL)	0.7 A, 0.5 A (UL)


**Function diagrams**



**Connections (Y1 = C, Function diagrams)**

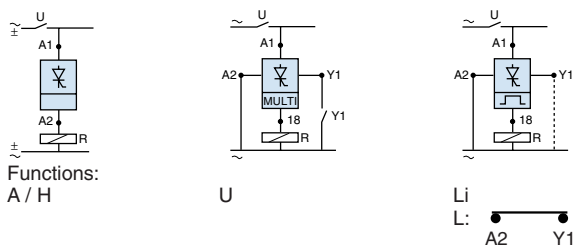

**Dimensions**

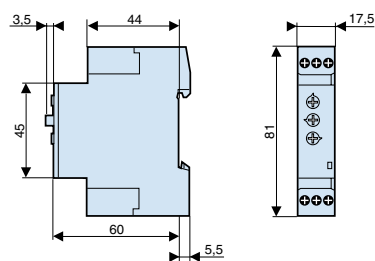

**To order, specify:**

**1** Type      **2** Part number  
Example: Chronos 2 Timers MUS2 88 826 004

Products and specifications subject to change without notice.  
Consult factory for application assistance.