

# D1U4CS-W-2200-12-HxxC Series

### AC/DC Front End Power Supply



#### **FEATURES**

- 2200W (220Vac), 1100W (110Vac) Output Power
- Certified to Climate Savers Computing Initiative<sup>SM</sup> and 80 PLUS® Gold efficiency
- 12V Main Output, 3.3V or 5V Standby Output
- 1U sized; dimensions 14.0" x 4.0" x 1.6"
- 24.5 Watts per cubic inch density
- N+1 redundancy capable, including hot-docking
- Active Current Sharing on main output
- Over-voltage, Over-current, Over-temperature protection
- Internal cooling fans (variable speed)
- I<sup>2</sup>C Bus Interface, PSMI compliant
- RoHS compliant
- Optional 1U x 19" Power-Shelf

### **PRODUCT OVERVIEW**

**The D1U4CS-W-2200-12-HxxC** is a 2200 Watt, power-factor-corrected (PFC) front-end power supply for hotswapping redundant systems. The main output is 12V with standby output of 5V or 3.3V. Packaged in 1U low profile, it is designed to deliver reliable bulk power to servers, workstations, storage systems or any 12V distributed power architecture systems requiring high power density. The highly efficient electrical and thermal design with internal cooling fans supports reliable operation conditions. The D1U4CS-W-2200-12-HxxC is designed to auto-recover from overtemperature fault. Status information is provided with front panel LEDs, logic signals and I<sup>2</sup>C management interface. Four units can be packaged into an optional 19" 1U power shelf to provide up to 8.8kW of power.

### SELECTION GUIDE

SELECTION GUIDE					
Model Number	Power Output High Line AC	Power Output Low Line AC	Main Output	Standby Output	Airflow
D1U4CS-W-2200-12-HC4C	2200W	1100W	12.12V	3.3V	Back to front
D1U4CS-W-2200-12-HC3C	2200W	1100W	12.12V	3.3V	Front to back
D1U4CS-W-2200-12-HA4C	2200W	1100W	12.12V	5V	Back to front
D1U4CS-W-2200-12-HA3C	2200W	1100W	12.12V	5V	Front to back

INPUT CHARACTERISTICS					
Parameter	Conditions	Min.	Тур.	Max.	Units
Input Voltage Operating Range	Low Line AC	90		140	Vac
Input voltage operating hange	High Line AC	180		264	Vac
Input Frequency		47	60	63	Hz
Turn-on Input Voltage	Ramp up	81		89	Vac
Turn-off Input Voltage	Ramp down	70.5		78	Vac
Maximum Input Current	Low Line AC 90Vac			13	Arms
Maximum Input Current	High Line AC 180Vac			13	Ams
Inrush Current	Cold start between 0-1msec			16.5	Apk
Power Factor	Output load >90%	0.95			
	Output load >50%	0.95			

#### **OUTPUT VOLTAGE CHARACTERISTICS**

Output Voltage	Parameter	Conditions	Min.	Тур.	Max.	Units
	Voltage Set Point Accuracy			12.12		Vdc
	Line and Load Regulation		11.76		12.48	VUC
12V	Ripple Voltage & Noise	20MHz Bandwidth			120	mV p-p
	Output Current		0		180	Α
	Load Capacitance				30000	μF
	Voltage Set Point Accuracy			5		Vdc
	Line and Load Regulation	20MHz Bandwidth	4.85		5.15	Vuc
5Vsb	Ripple Voltage & Noise				50	mV p-p
	Operating Range		0		5	Α
	Load Capacitance				10000	μF
	Voltage Set Point Accuracy			3.3		Vdc
	Line and Load Regulation	20MHz Bandwidth	3.2		3.4	vuc
3.3Vsb	Ripple Voltage & Noise				50	mV p-p
	Operating Range		0		6	А
	Load Capacitance				10000	μF

1 Ripple and noise are measured with 0.1 uF of ceramic capacitance and 10 uF of tantalum capacitance on each of the power supply outputs. The output noise requirements apply over a 0 Hz to 20 MHz bandwidth. A short coaxial cable with 50ohm scope termination is used.



www.murata-ps.com

# AC/DC Front End Power Supply

Parameter	Conditions	Min.	Тур.	Max.	Units
Remote Sense			120		mV
Efficiency (80+ measurement; excludes fan load)	20% and full load	89.10			%
Enciency (80+ measurement, excludes fail load)	50% load	93.04			%
Output Rise Monotonicity	Overshoot less than 10% for all outputs, no	voltage negativ	ve between 10%	% to 95% during r	amp up
Start-up Time	AC ramp up		1.5		S
Start-up Time	PS_On activated		150		ms
	12V Ramp 1A/μs			±360	
Transient Response	5Vsb Ramp 1A/µs			±150	mV
	3.3Vsb Ramp 1A/µs			±100	
Current sharing accuracy (up to 3 in parallel)	At 100% load			±7	%
Hot Swap Transients	All outputs within regulation			5	%
Hold-up Time	100% load	12			ms
GENERAL CHARACTERISTICS					
Parameter	Conditions	Min.	Тур.	Max.	Units
Storage Temperature Range	Non-condensing	-40		70	
	D1U4CS-W-2200-12-HC4C and D1U4CS-W-2200-12-HA4C models only	0		50	°C
Operating Temperature Range	D1U4CS-W-2200-12-HC3C and 0 D1U4CS-W-2200-12-HA3C models only			40	
Operating Humidity	Non-condensing	10		90	0/
Storage Humidity		5		90	%
Shock	30G non operating				
Sinusoidal Vibration	0.5G, 5 – 500 Hz operating				
MTBF	Calculated per Bellcore at Ta=30°C	400			Khrs
WIBF	Demonstrated	400			Khrs
Acoustic	ISO 7779-1999			60	dB LpAn
Safety Approvals	c-CSA-us (CSA 60950-1-03/UL 60950-1, S	econd Edition)	-		
nput Fuse	Power Supply has internal 20A/250V fast bl	ow fuse on the	AC line input		
Material Flammability	UL 94V-0				
Switching Frequency	TBD				
Weight	2.1kg				

Output Voltage	Parameter	Conditions	Min.	Тур.	Max.	Units	
	Over-temperature	Auto-restart	55		65	°C	
12V	Over Voltage	Latching	13.12		14.12	V	
121	Over Current	Latching	197		225	А	
5Vsb	Over Voltage	Latching	5.6		6.26	V	
SVSD	Over Current	Brick wall, autorecovery	5.5		6.25	А	
3.3Vsb	Over Voltage	Latching	3.57		4.02	V	
3.3VSD	Over Current	Brick wall, autorecovery	6.5		8.0	А	

www.murata-ps.com

# AC/DC Front End Power Supply

ISOLATION CHARACTERISTICS							
Parameter	Conditions	Min.	Тур.	Max.	Units		
Inculation Sofaty Pating / Test Voltage	Input to Output - Reinforced	3000			Vrms		
Insulation Safety Rating / Test Voltage	Input to Chassis - Basic	1500			Vrms		
Isolation	Output to Chassis						
1501411011	Output to Output						
Material Flammability	UL 94V-0						
Grounding	Main Output Return and Standby Output Return are connected internally. 100kΩ resistor parallel with 100nF capacitor is connected between Return and power supply chassis. Main Output Return should be connected to the System Chassis						

	CONTROL SIGNALS		
ę	Status	Conditions	Description
		Off	No AC input to all PS
L	ED	Flashing Green	Main Output Absent
		Green	Power Supply Good
I <sup>2</sup> C Registers Refer to Application Note #ACAN-33			

EMISSIONS AND IMMUNITY				
Characteristic	Description	Criteria		
Harmonics	IEC/EN 61000-3-2			
Voltage Fluctuation and Flicker	IEC/EN 61000-3-3			
Emission Conducted	FCC 47 CFR Parts 15/CISPR 22/EN55022	Class A, 6dB margin		
Emission Radiated	FCC 47 CFR Parts 15/CISPR 22/EN55022	Class A, 6dB margin		
		4kV contact discharge		
ESD	IEC/EN 61000-4-2	8kV operational air discharge		
		15kV non-operational air discharge		
Electromagnetic Field	IEC/EN 61000-4-3			
Electrical Fast Transients/Burst	IEC/EN 61000-4-4			
Surge	IEC/EN 61000-4-5	1kV/2kV, Performance Criteria A		
RF Conducted Immunity	IEC/EN 61000-4-6	3 Vac, 80% AM, 1 kHz, Performance Criteria A		
Magnetic Immunity	IEC/EN 61000-4-8	3 A/m		
Voltage dips, interruptions	IEC/EN 61000-4-11			

AC/DC Front End Power Supply

P1	P2	P3		P4	P5	P6	P7	P8	P9	P10	x1	x2	x3	x4	<u>x5</u>	<u>x6</u>	-
											AC_0K/H	PW_0K/H	Vsb RETURN	Vsb RETURN	Vsb +OUT	Vsb +0UT	
Vour	Vоит	Vou		Vоит	Vout	VRTN	Vrtn	Vrtn	Vrtn	Vrtn	SPARE	SMB/ Alert	Vsb RETURN	Vsb Return	Vsb +0UT	Vsb +0UT	
Vout	VOUT	VUU		001	VOUT	VRIN	VRIN	VRIN	VRIN	VRIN	I_SHARE	I <sup>2</sup> C ADR0	I <sup>2</sup> C ADR1	I <sup>2</sup> C ADR2	PS_KILL	PS_ PRESENT	
											SENSE +	SENSE -	I <sup>2</sup> C DATA	I <sup>2</sup> C CLOCK	SPARE	PS_ON/L	
		•				•				•		•			mate-la	ast pins	1
n Assignn	nent		Signa	al Narr	ıe		Descriptio	on					High Level Low Level		I Max		
to P5			VOUT				Main outp	•									
6 to P10		VRTN				Main outp	0	,									
A1 5			Sense +				VOUT remote sense, positive node input, connected to the +ve load point										
2			Sense -		se - VOUT remote sense, negative node input, connected to th -ve load point		VOUT remote sense, negative node input, connected to the -ve load point										
5, C6, D5,	D6		Vsb				Standby v	oltage ou <sup>-</sup>	tput								
8, C4, D3,			Vsb	b Return St			Standby v	oltage, re	turn, tied	internally	to Output Re	turn					
			I_Sha	are			Active loa	d sharing	bus				V8 – 0		-4 mA / +5 mA		
			AC_C				Input AC V 10kΩ to 3		K" signal	output (In	ternal pull up		>2.1V <0.8V		+4 mA -2 mA		
2			PW_0	_0K/H		PW_0K/H			Internal p	al pull up of 10K ohm to 3.3V >2.1V <0.8V			+4 mA -2 mA				
2			SMB/	/Alert		;	SMB/Aleri	signal ou	itput (ope	n collecto	7)						
5			PS_K	Kill			Floating pin will turn off P/S (shorter pin, last-make and first-break contact for hot plugging). This signal overrides PS-On in disabling the Main Output >2.1V (open) <- 0.8V (active, PS:On) N/A					N/A					
6			PS_P	Present			Internally	tied to 3.3	3V return				0 V				
j			PS_0	)n/L			Internal 3.3K ohm pull-up to 3.3V, (accepts open collector/ drain drive), This signal to be pulled low to turn-on power supply <2.1V (open, or 3.3V) <0.8V (active, PS:On)										
}			I <sup>2</sup> C Da	ata			I <sup>2</sup> C serial data bus; internal 4.64K ohm pull-up 3.3V										
			I <sup>2</sup> C CI	lock			I <sup>2</sup> C serial clock bus; internal 4.64K ohm pull-up 3.3V										
2			I <sup>2</sup> C Ac	dr0			Address input 0, internal 10K ohm pull-up to 3.3V <pre>&gt;2.1V &lt;0.8V</pre> ±1 mA										
}			I <sup>2</sup> C Ac	dr1			Address ir	nput 1, int	ernal 10K	ohm pull	-up to 3.3V		>2.1V <0.8V		±1 mA		
Ļ			I <sup>2</sup> C Ac	dr2			Address input 2, internal 10K ohm pull-up to 3.3V     >2.1V <0.8V										


### D1U4CS MATING CONNECTORS

	12V D1U4 mating connector								
	Pres	s Fit	Solo	der 1					
	Straight Right Angle		Straight	Right Angle					
Murata-PS	N/A	4321-01454-0	N/A	N/A					
FCI	N/A	51762-11002400ABLF	N/A	N/A					

1 Solder connector recommended for board thickness of <0.090

www.murata-ps.com

AC/DC Front End Power Supply

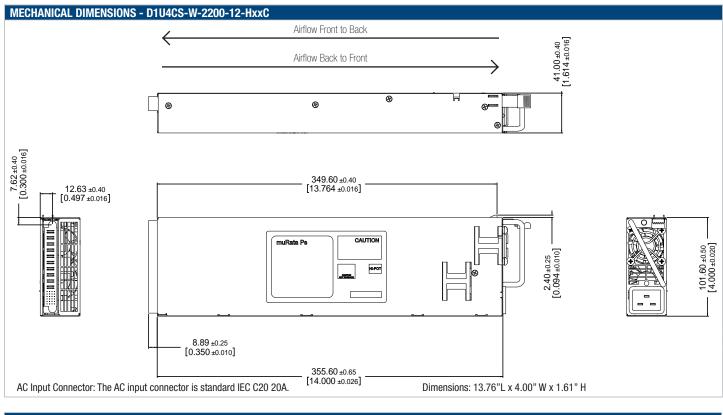

OPTIONAL ACCESSORIES						
Description	Part Number					
12V D1U4CS output connector card	D1U4CS-12-CONC					

APPLICATION NOTES	
Document Number	Description
ACAN-32	Output Connector Card for D1U4CS
ACAN-33	D1U4CS Communication Protocol

Murata Power Solutions, Inc. 11 Cabot Boulevard, Mansfield, MA 02048-1151 U.S.A. ISO 9001 and 14001 REGISTERED

www.murata-ps.com/locations

Murata Power Solutions, Inc. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice. © 2010 Murata Power Solutions, Inc.