




Details are subject to change without notice.

ADJUSTABLE TRIPLE-CHANNEL TFT LCD DC-DC CONVERTER

Features

- Built in 1.6A, 0.2Ω Switching NMOS
- Fault and Thermal Protection
- Internal Soft-Start Function
- Internal Power Up Sequencing
- Dual Adjustable Charge Pump Output
Positive Output to 40V
Negative Output to -40V
- Power Good Output
- TSSOP-16 Package

Pin Configuration

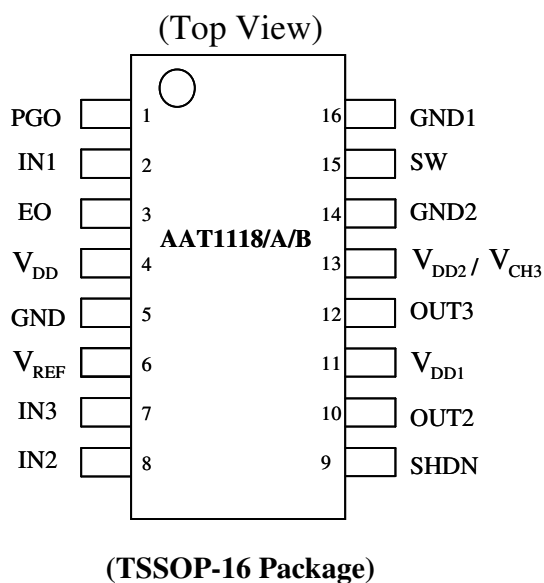

General Description

The AAT1118/A/B is an adjustable triple-channel TFT LCD DC-DC converter that provides one current mode PWM, one positive charge pump and one negative charge pump. Built-in functions include soft-start and power up sequencing. When power is turned on, soft-start avoids inrush current. Power up sequencing feature provides compensation for LCD panel to maintain a smooth voltage during a turn-on cycle.

The DC-DC converter consists of an on-chip voltage reference, error amplifier, current sense, pulse width modulation controller, under-voltage lockout protection, thermal detect, soft-start, and fault protection circuit.

When the two charge pumps are in operation, the output voltage would be doubled and the generated VP3 and VP2 (Note 1) could switch on or off TFT gate.

With the minimal external components, the AAT1118/A/B offers a simple and economical solution for TFT LCD power.

Note 1: Please refer to page 13 and 14 for VP3 and VP2.

**Pin Description**

| PIN NO. | NAME | I/O | DESCRIPTION |
|----------------|------------------|------------|--|
| 1 | PGO | O | HV Switch Output |
| 2 | IN1 | I | Inverting Input Pin of PWM Error Amplifier |
| 3 | EO | I | Output Pin of PWM Error Amplifier |
| 4 | V _{DD} | - | Power Supply |
| 5 | GND | - | Ground |
| 6 | V _{REF} | O | Reference Voltage Output |
| 7 | IN3 | I | Charge Pump Channel 3 Feedback Input |
| 8 | IN2 | I | Charge Pump Channel 2 Feedback Input |
| 9 | SHDN | I | Shutdown Control Pin; High for Enable |
| 10 | OUT2 | O | Charge Pump Channel 2 Output |
| 11 | V _{DD1} | - | High Voltage Power Supply |
| 12 | OUT3 | O | Charge Pump Channel 3 Output |
| 13 | V _{DD2} | - | High Voltage Power Supply |
| | V _{CH3} | O | Power Output for Channel 3 (AAT1118B Only) |
| 14 | GND2 | - | Ground |
| 15 | SW | O | Switch Pin |
| 16 | GND1 | - | SW MOS Ground |

**Absolute Maximum Ratings**

| PARAMETER | SYMBOL | VALUE | UNIT |
|--|---------------|-----------------|------|
| V_{DD} to GND | V_{DD} | 7 | V |
| SW to GND | V_{SW} | 18 | V |
| V_{DD1} , V_{DD2} to GND | V_{DDH} | 16 | V |
| Input Voltage 1 (IN1, IN2, IN3, SHDN) | V_{I1} | $V_{DD} + 0.3$ | V |
| Output Voltage 1 (EO, V_{REF}) | V_{O1} | $V_{DD} + 0.3$ | V |
| Output Voltage 2 (OUT2, OUT3, SW, PGO) | V_{O2} | $V_{DDH} + 0.3$ | V |
| Operating Free-Air Temperature Range | T_C | -40 to +85 | °C |
| Storage Temperature Range | $T_{storage}$ | -45 to +125 | °C |
| Power Dissipation | P_d | 750 | mW |



Electrical Characteristics, $V_{DD}= 3.3V$, $V_{DDH}= 10V$

Operating Power

| PARAMETER | SYMBOL | TEST CONDITION | MIN | TYP | MAX | UNIT |
|--------------------------------|------------|--------------------------------|-----|-----|------|-------------|
| Input Supply Voltage Range | V_{DD} | | 2.6 | | 5.5 | V |
| VDD Under Voltage Lockout | V_{UVLO} | Falling | 2.1 | 2.2 | 2.3 | V |
| | | Rising | 2.3 | 2.4 | 2.5 | V |
| Regulated Output Voltage Range | V_{PI} | | 6 | | 14 | V |
| Quiescent Current | I_{VDD} | $V_{IN1}=1.3V$, not switching | | 0.5 | 0.8 | mA |
| | | $V_{IN1}=1.1V$, switching | | 3 | 6 | mA |
| Shutdown Current | I_{SHDN} | $V_{SHDN}=GND$ | | 0.1 | 10.0 | μA |
| Thermal Shutdown | | | | 160 | | $^{\circ}C$ |

Reference Voltage

| PARAMETER | SYMBOL | TEST CONDITION | MIN | TYP | MAX | UNIT |
|-------------------|-----------|---|-------|-------|-------|------|
| Reference Voltage | V_{REF} | $I_{Vref} = 100\mu A$ | 1.238 | 1.250 | 1.262 | V |
| Line Regulation | V_{RI} | $I_{Vref} = 100\mu A$, $V_{DD}=2.5V\sim 5V$ | - | 2 | 5 | mV |
| Load Regulation | V_{RO} | $I_{Vref} = 0\sim 100\mu A$ | - | 1 | 5 | mV |

EA (Error Amplifier)

| PARAMETER | SYMBOL | TEST CONDITION | MIN | TYP | MAX | UNIT |
|----------------------------------|-----------|--|-------|-------|-------|-------------|
| Feedback Voltage | V_{IN1} | Level to produce $V_{EO}=1.24V$ | 1.238 | 1.250 | 1.262 | V |
| Input Bias Current | I_{B1} | $V_{IN1}=1.24V$ | | 0 | 40 | nA |
| Feedback-Voltage Line Regulation | V_{RI} | Level to produce $V_{EO} = 1.24V$ $2.6V < V_{DD} < 5.5V$ | | 0.05 | 0.15 | %/V |
| Transconductance | g_m | $\Delta I=5\mu A$ | 70 | 105 | 240 | $\mu A / V$ |
| Voltage Gain | A_v | | | 1,500 | | V / V |
| Fault Detect Trigger Voltage | V_{FI} | | 1.07 | 1.10 | 1.14 | V |

**Electrical Characteristics, $V_{DD}= 3.3V$, $V_{DDH}= 10V$** **Oscillator**

| PARAMETER | SYMBOL | TEST CONDITION | MIN | TYP | MAX | UNIT |
|-----------------------|-----------|----------------|-------|-------|-------|------|
| Oscillation Frequency | f_{OSC} | | 1,100 | 1,320 | 1,600 | kHz |
| Maximum Duty Cycle | D_{MAX} | | 79 | 85 | 92 | % |

N-Channel Switch

| PARAMETER | SYMBOL | TEST CONDITION | MIN | TYP | MAX | UNIT |
|-----------------|-------------|----------------|-----|------|-------|----------|
| Current Limit | I_{LIM} | | 1.1 | 1.6 | 2.1 | A |
| On-Resistance | R_{ON} | $I_{SW}=1.2A$ | | 0.28 | 0.50 | Ω |
| Leakage Current | I_{SWOFF} | $V_{SW}=12V$ | | 0.01 | 20.00 | μA |

Control Inputs Characteristics

| PARAMETER | SYMBOL | TEST CONDITION | MIN | TYP | MAX | UNIT |
|----------------------|-----------|----------------|-----------------|-----------------|-----------------|---------|
| Input Low Voltage | V_{IL} | | | | 0.3 V_{DD} | V |
| Input High Voltage | V_{IH} | | 0.7 V_{DD} | | | V |
| Hysteresis | V_{HYS} | | | 0.1 V_{DD} | | V |
| SHDN Pull Up Current | I_{PH} | | | 0.001 | 1.000 | μA |

Electrical Characteristics, $V_{DD}= 3.3V$, $V_{DDH}= 10V$

Soft Start & Fault Detect Time

| PARAMETER | SYMBOL | TEST CONDITION | MIN | TYP | MAX | UNIT |
|-----------------------------------|-----------|----------------|------|------|------|------|
| Channel 1 Soft Start Time | t_{SS1} | | | 14 | | ms |
| Channel 2 Soft Start Time | t_{SS2} | | | 3.5 | | ms |
| Channel 3 Soft Start Time | t_{SS3} | | | 3.5 | | ms |
| Channel 1 to Channel 2 Delay | t_{D12} | AAT1118A | | 7 | | ms |
| Channel 2 to Channel 3 Delay | t_{D23} | AAT1118B | | 10.5 | | ms |
| During Fault Protect Trigger Time | t_{FP} | | | 83 | | ms |
| IN1 Fault Protection Voltage | V_{F1} | | 1.05 | 1.10 | 1.15 | V |
| IN2 Fault Protection Voltage | V_{F2} | | 0.08 | 0.13 | 0.18 | V |
| IN3 Fault Protection Voltage | V_{F3} | | 1.05 | 1.10 | 1.15 | V |




Electrical Characteristics, $V_{DD}= 3.3V$, $V_{DDH}= 10V$

Charge Pump Regulator Characteristics

| PARAMETER | SYMBOL | TEST CONDITION | MIN | TYP | MAX | UNIT |
|------------------------------|------------|--------------------|------|------|------|----------|
| V_{DD1} Input Supply Range | V_{DD1} | | 6 | | 15 | V |
| V_{DD2} Input Supply Range | V_{DD2} | | 6 | | 15 | V |
| IN2 Threshold Voltage | IN2 | | -50 | 0 | 50 | mV |
| IN3 Threshold Voltage | IN3 | | 1.20 | 1.25 | 1.30 | V |
| IN2 Input Bias Current | I_{B2} | $V_{IN2} = -0.05V$ | -50 | | 50 | nA |
| IN3 Input Bias Current | I_{B3} | $V_{IN3} = -1.5V$ | -50 | | 50 | nA |
| Charge Pump Frequency | f_{OSCP} | | 540 | 640 | 740 | kHz |
| OUT2 Switch R-on | R_{ONP2} | | | 3 | 20 | Ω |
| | R_{ONN2} | | | 3 | 20 | Ω |
| OUT3 Switch R-on | R_{ONP3} | | | 3 | 20 | Ω |
| | R_{ONN3} | | | 3 | 20 | Ω |
| Continuous Output Current | I_{OUT} | | | | 30 | mA |




BLOCK DIAGRAM
AAT1118/A

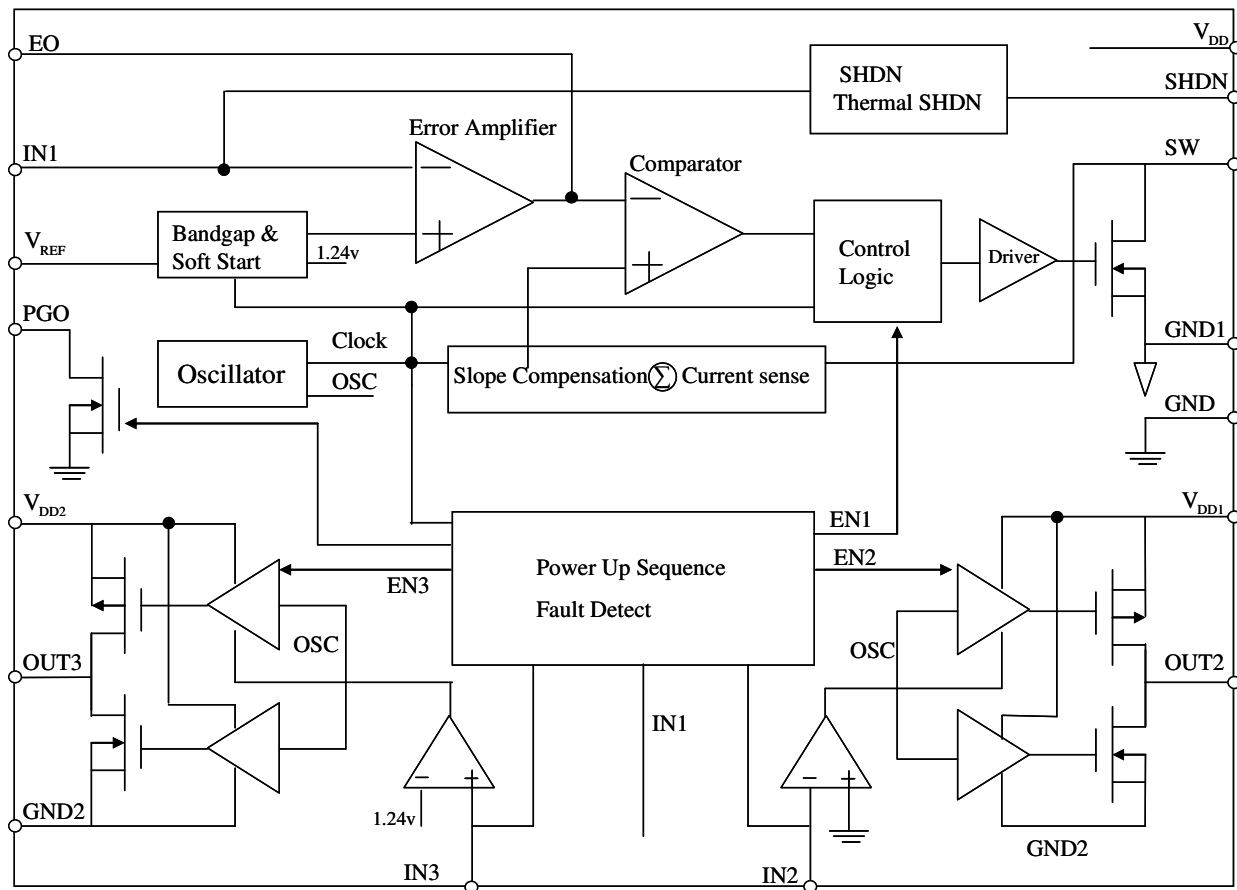









BLOCK DIAGRAM
AAT1118B

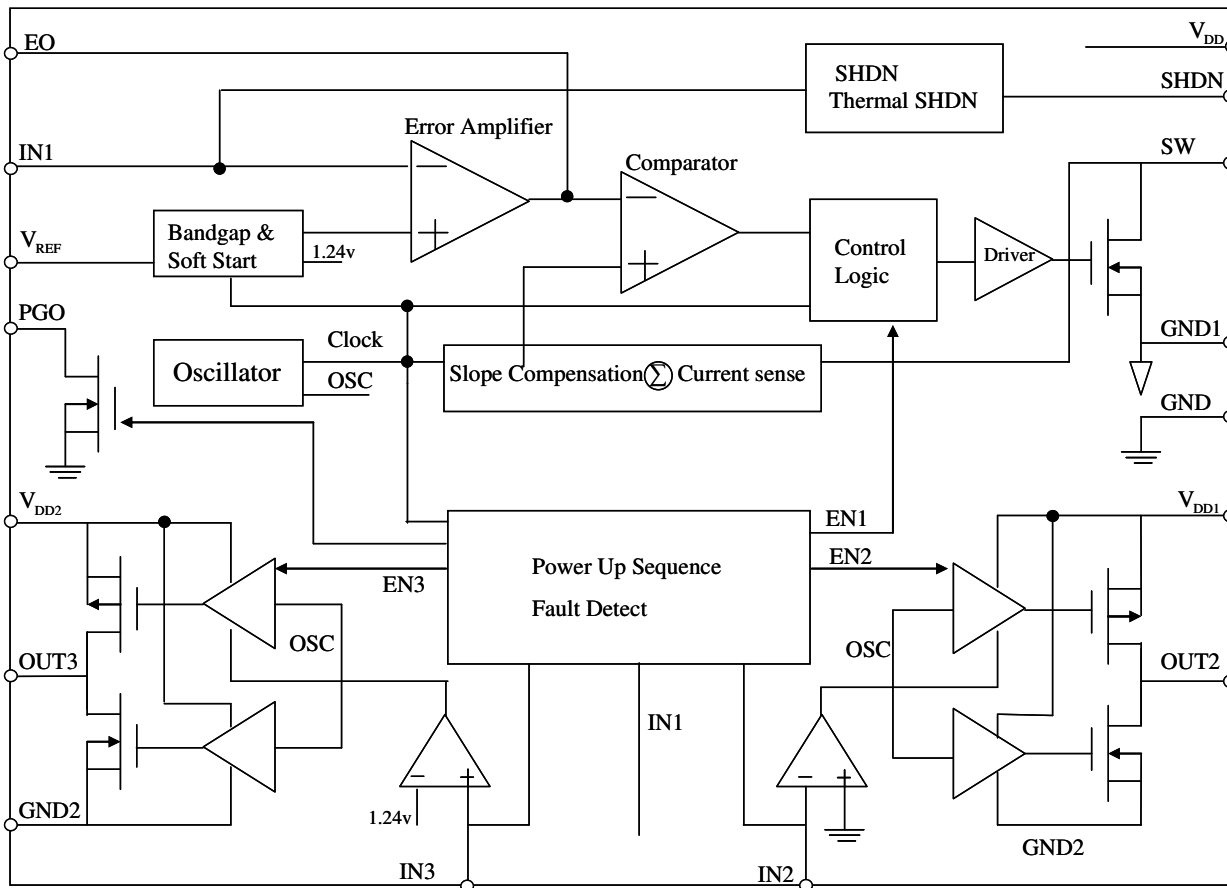







Typical Operating Characteristics

(VIN = 3.3V, T_C = +25°C, unless otherwise noted.)

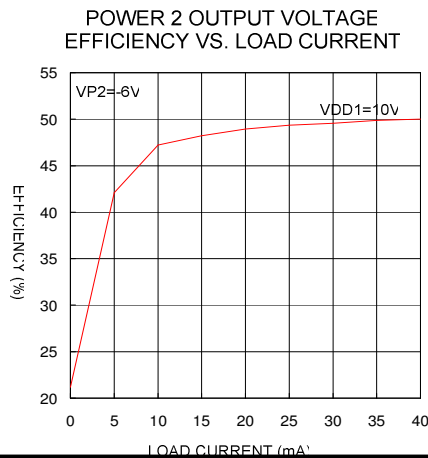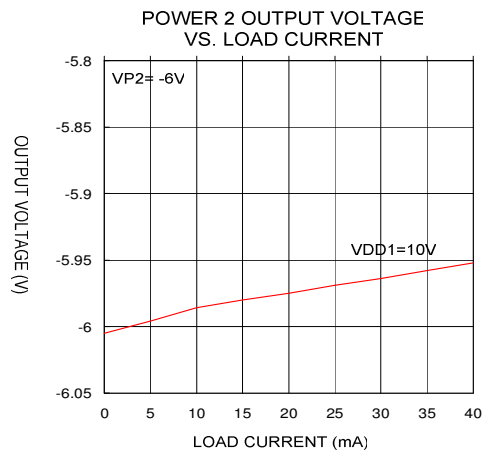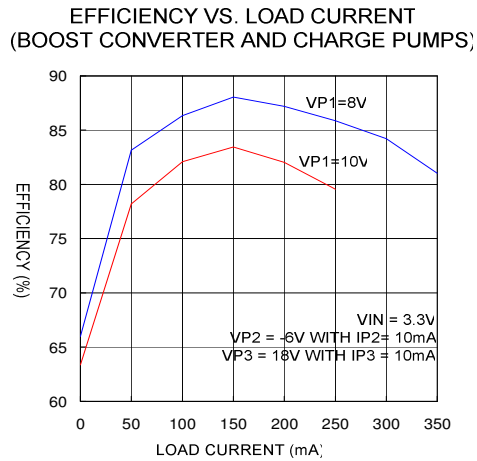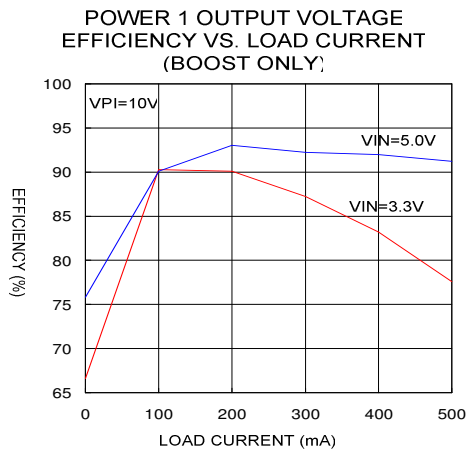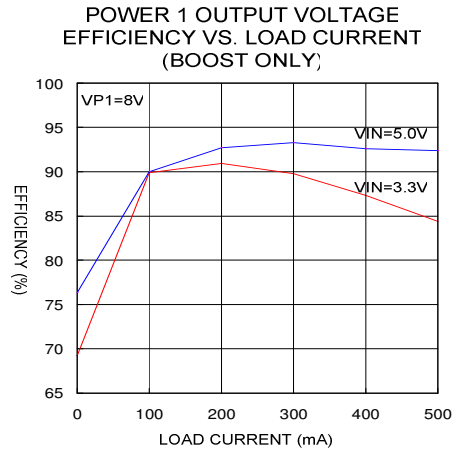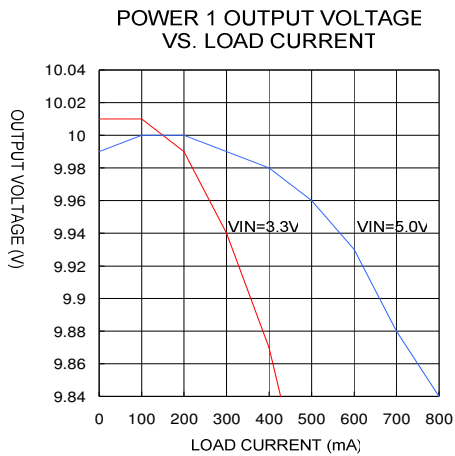




Typical Operating Characteristics (Continued)
(VIN = 3.3V, T_C = +25°C, unless otherwise noted.)

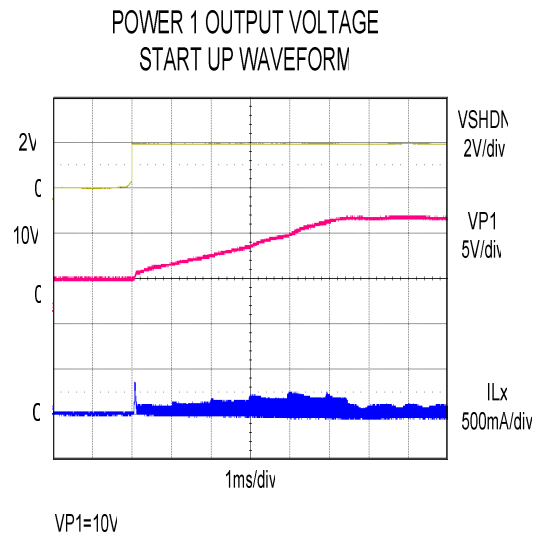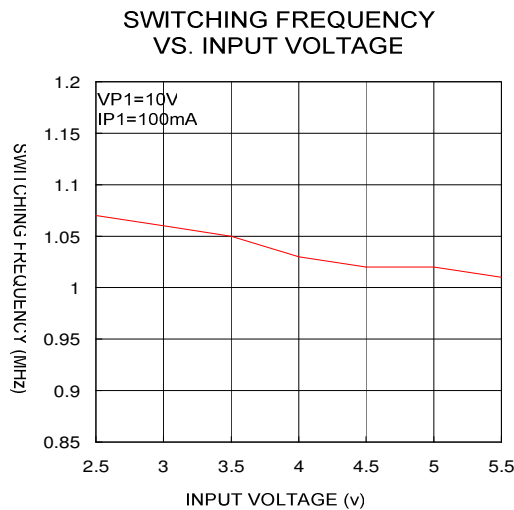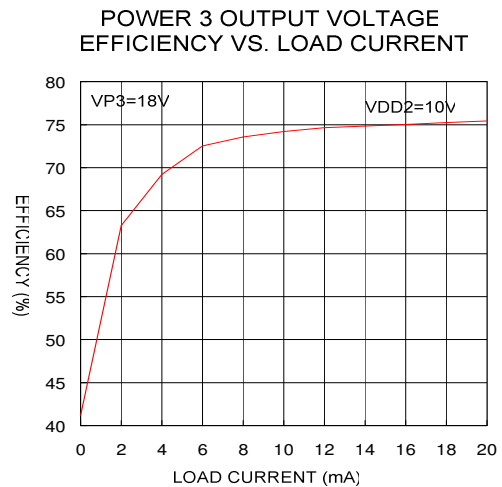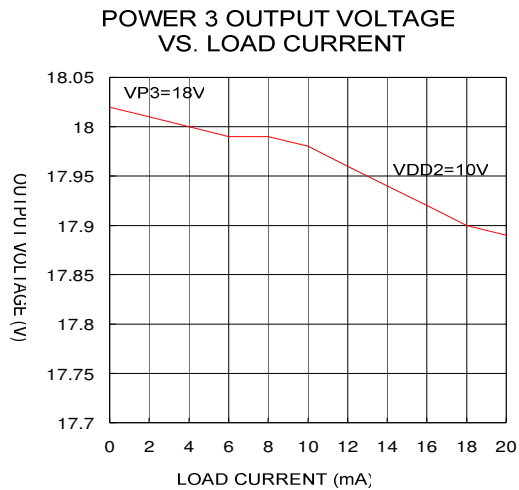




Typical Operating Characteristics (Continued)
(VIN = 3.3V, Tc = +25°C, unless otherwise noted.)

POWER 1 OUTPUT VOLTAGE
WAVEFORM WITH LOAD

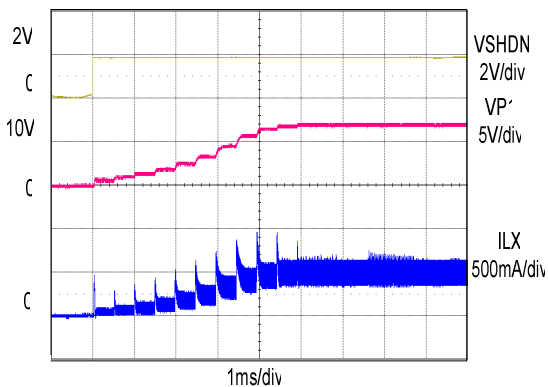


VP1=10V, IP1=200mA

POWER ON SEQUENCING
AAT1118

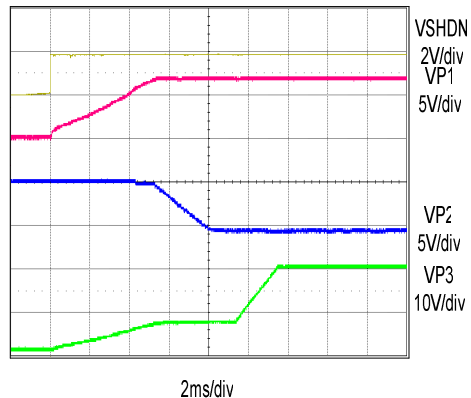


VP1=10V, VP2=-6V, VP3=18V

OUTPUT RIPPLE WAVEFORM

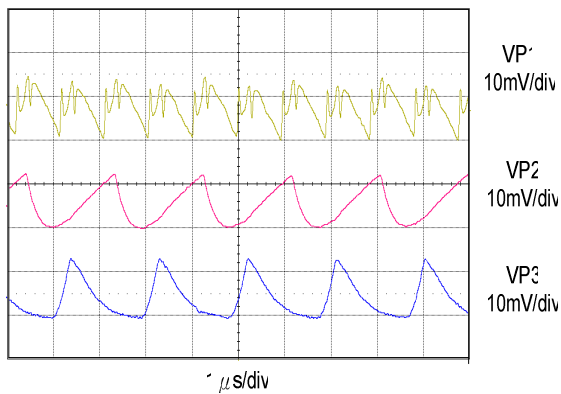

VP1=10V, IP1=200mA
VP2=-6V, IP2=10mA
VP3=18V, IP3=10mA


LOAD TRANSIENT RESPONSE

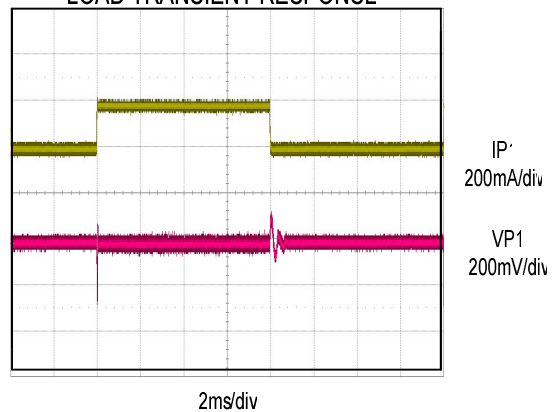

VIN=3.3V, VP1=10V
IP1 (20mA TO 200mA)




Application Circuit
AAT1118/A

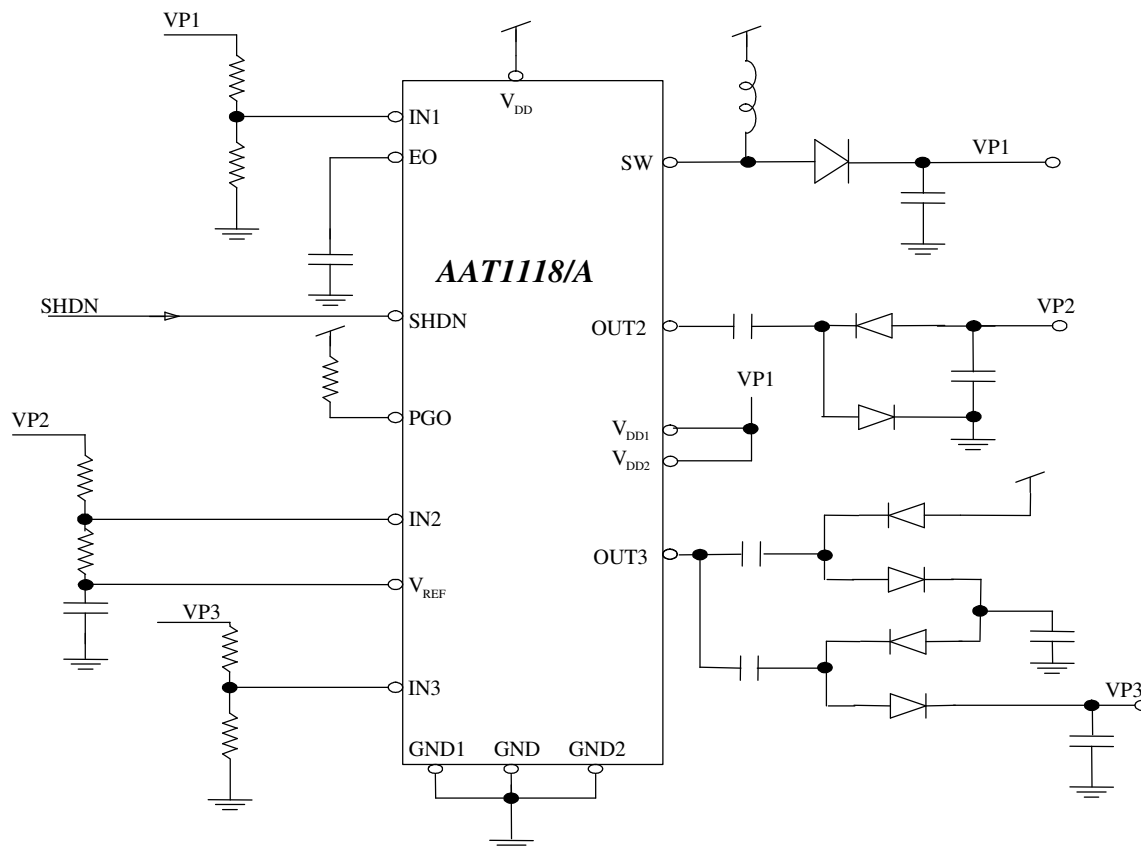




Application Circuit
AAT1118B

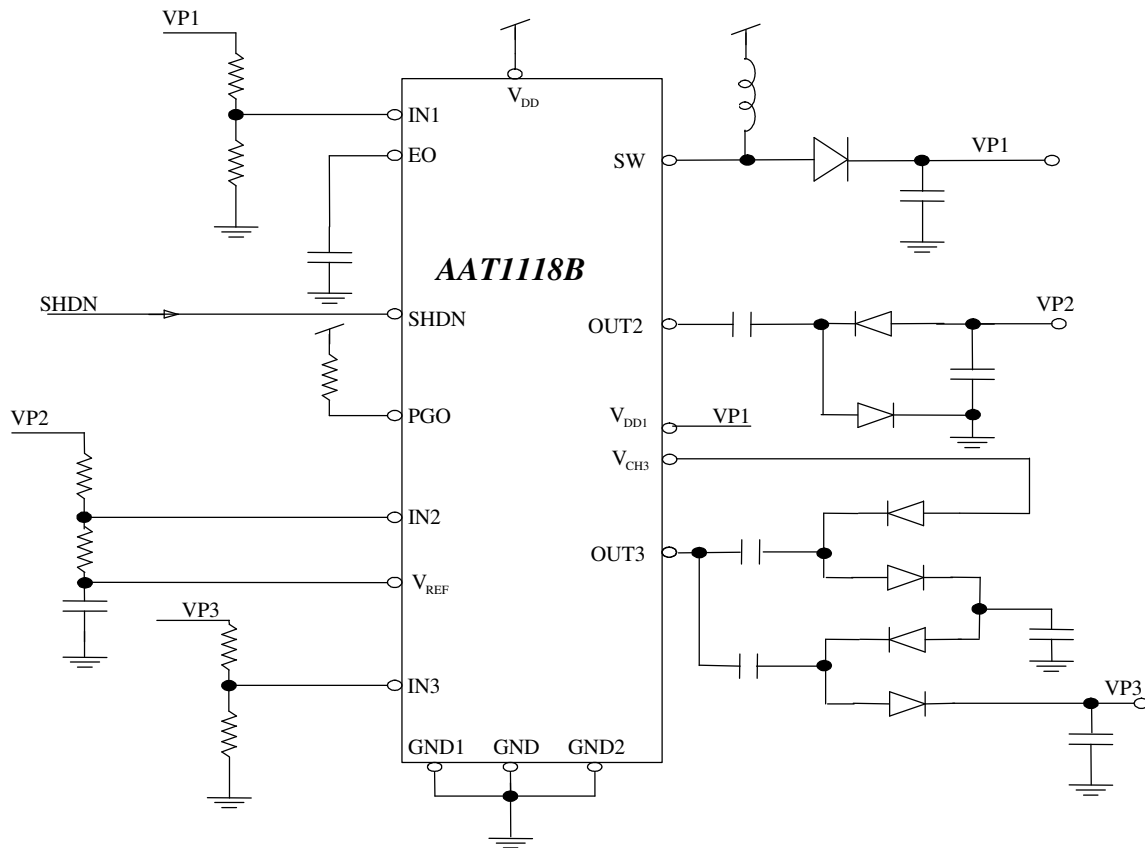




Timing Chart
AAT1118

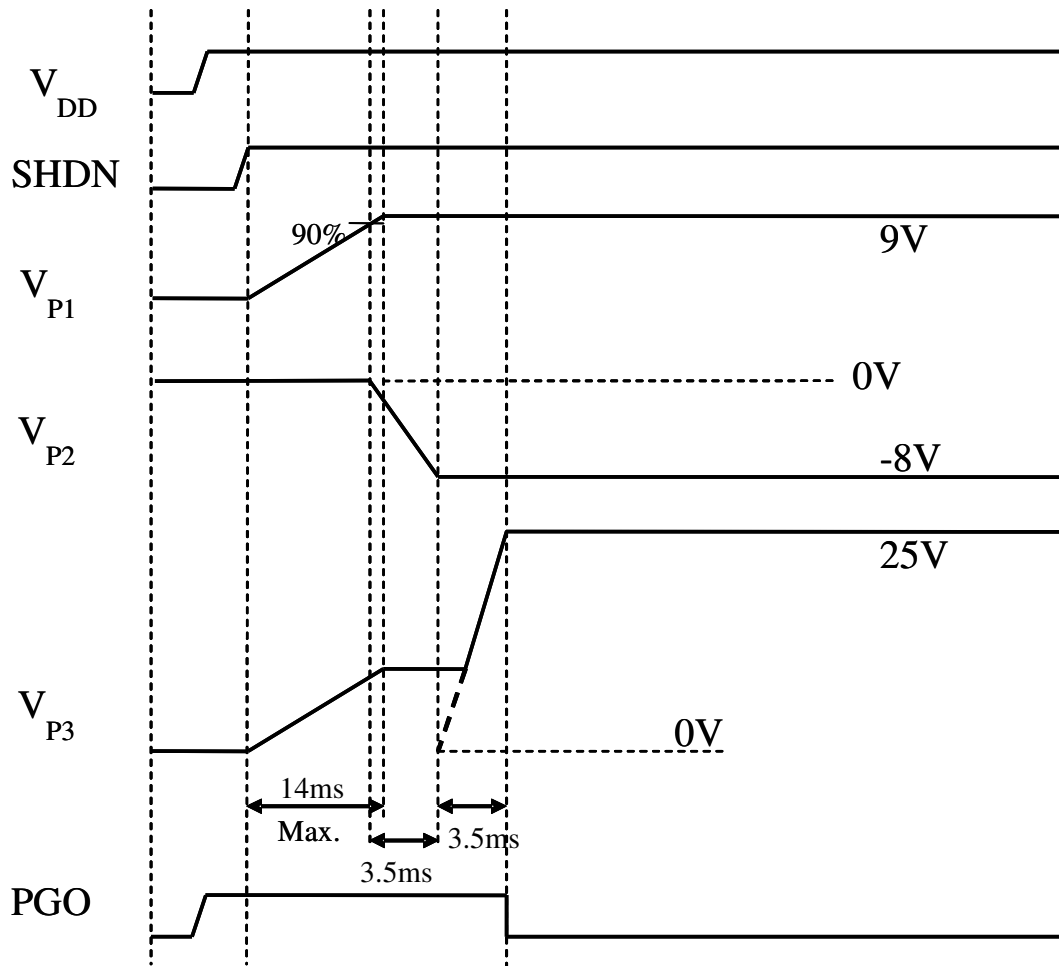




Timing Chart
AAT1118A

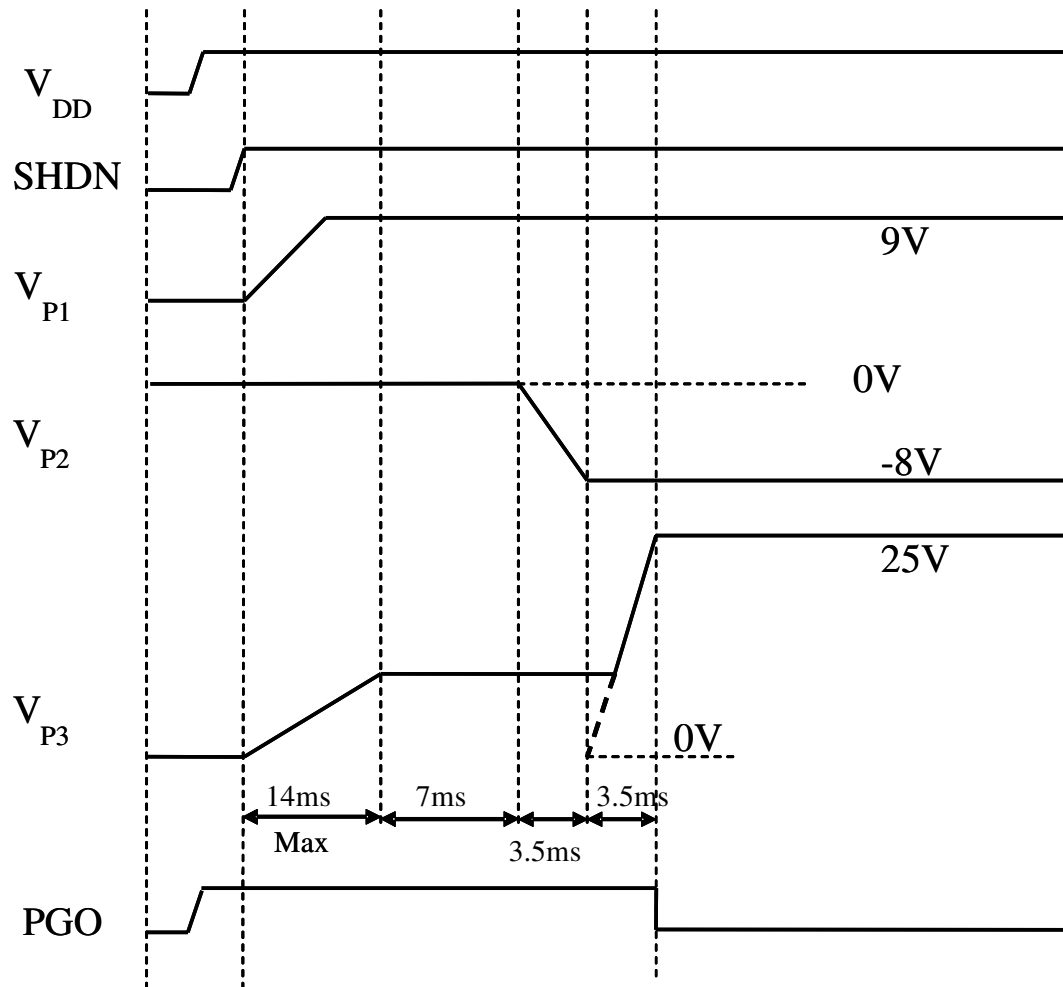




Timing Chart
AAT1118B

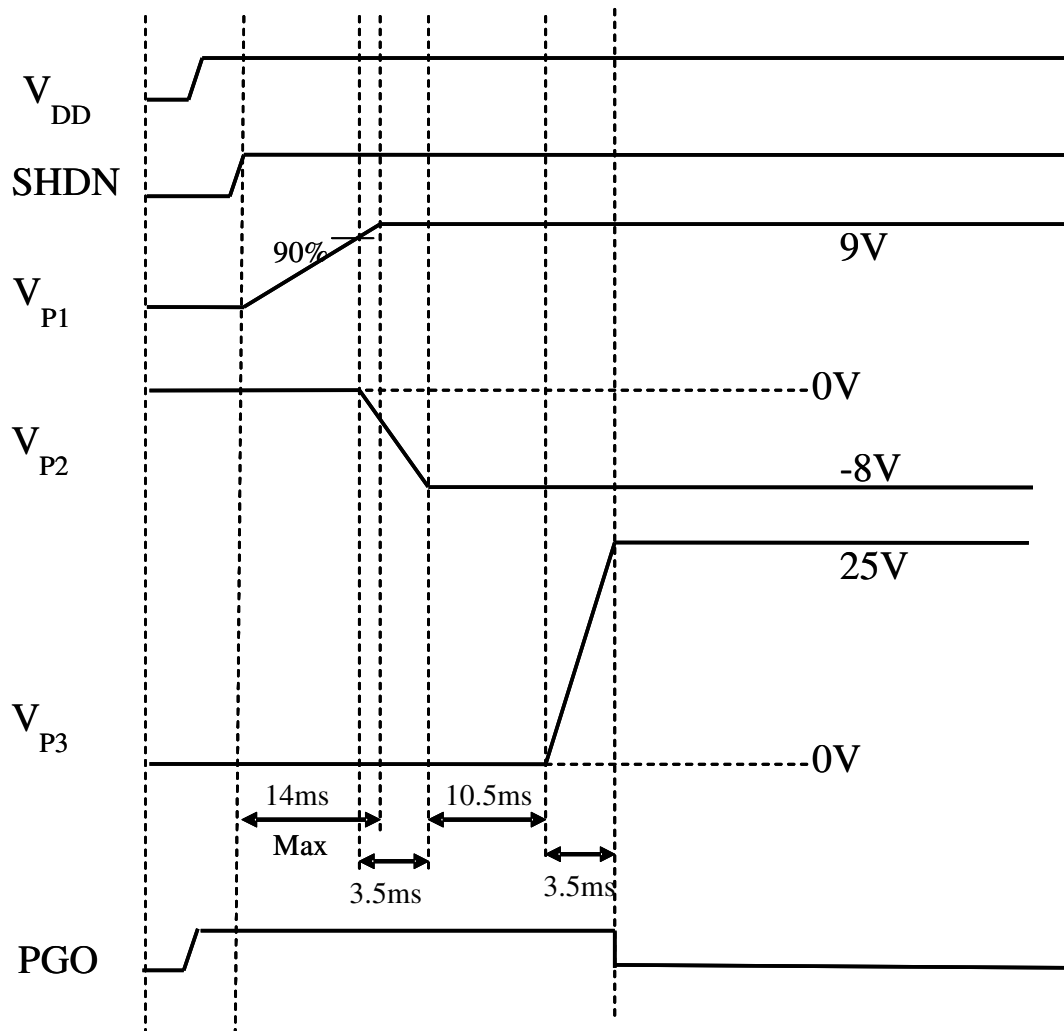



Package Dimension

16-Pin TSSOP

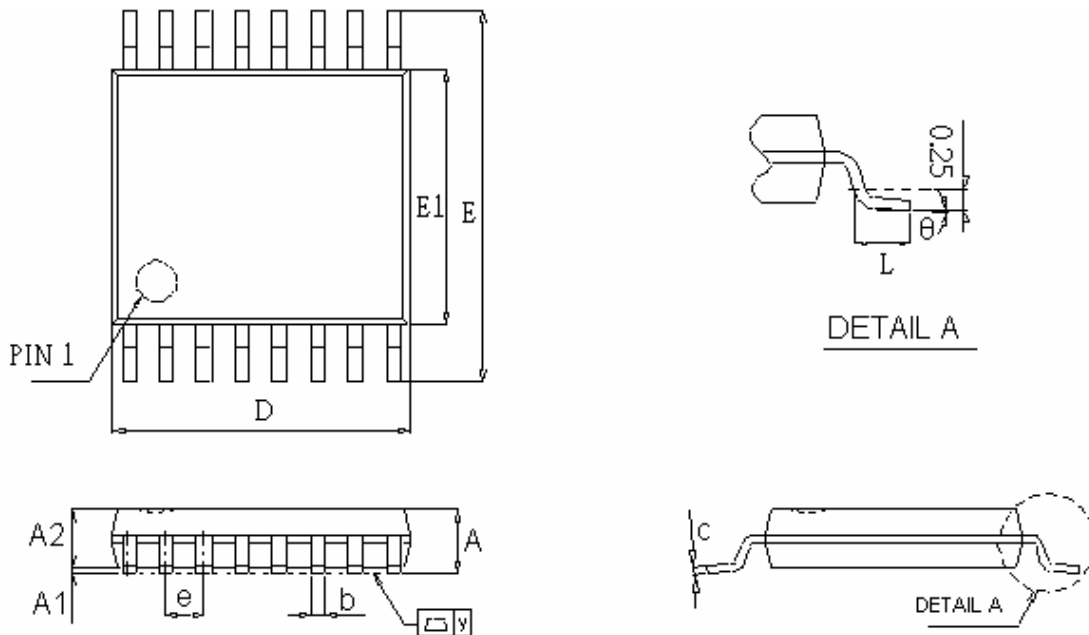

| Symbol | Dimensions In Millimeters | | | Dimensions In Inches | | |
|--------|---------------------------|-------|-------|----------------------|--------|--------|
| | Min | TYP | Max | Min | TYP | Max |
| A | 1.05 | 1.10 | 1.20 | 0.041 | 0.043 | 0.047 |
| A1 | 0.05 | 0.10 | 0.15 | 0.002 | 0.004 | 0.006 |
| A2 | ----- | 1.00 | 1.05 | ----- | 0.039 | 0.041 |
| b | 0.20 | 0.25 | 0.28 | 0.008 | 0.010 | 0.011 |
| C | ----- | 0.127 | ----- | ----- | 0.005 | ----- |
| D | 4.900 | 5.075 | 5.100 | 0.1930 | 0.1998 | 0.2000 |
| E | 6.2 | 6.4 | 6.6 | 0.244 | 0.252 | 0.260 |
| E1 | 4.3 | 4.4 | 4.5 | 0.170 | 0.173 | 0.177 |
| e | ----- | 0.65 | ----- | ----- | 0.026 | ----- |
| L | 0.5 | 0.6 | 0.7 | 0.020 | 0.024 | 0.028 |
| y | ----- | ----- | 0.076 | ----- | ----- | 0.003 |
| θ | 0° | 4° | 8° | 0° | 4° | 8° |