

FEATURES

- Guaranteed Temperature Stability
- Maximum 0.6Ω Dynamic Impedance
- Adjustable for Minimum Temperature Coefficient
- Wide Operating Current Range

APPLICATIONS

- Reference for 5V Systems
- 8 Bit A/D and D/A Reference
- Digital Voltmeters
- Current Loop Measurement and Control Systems
- Power Supply Monitor

DESCRIPTION


The LM136-2.5 is a general purpose shunt regulator diode designed to operate over a wide current range while maintaining good stability with time and temperature. The third terminal allows either the temperature coefficient to be minimized or the reference voltage to be adjusted without changing the temperature coefficient. Because it operates as a shunt regulator it can be used equally well as a positive or negative reference.

The LM136-2.5 is available with initial tolerances as low as 1% in either a TO-46 metal can for hermetic requirements or a low cost TO-92 plastic package.


3

Linear's advanced design, test and process techniques have optimized the LM136-2.5 to achieve superior performance and reliability over previous designs. For more demanding precision reference applications requiring very low initial tolerance and temperature coefficients, consult the LT1009 data sheet. A typical 2.5 Volt reference with trim is shown below.

2.5 Volt Reference

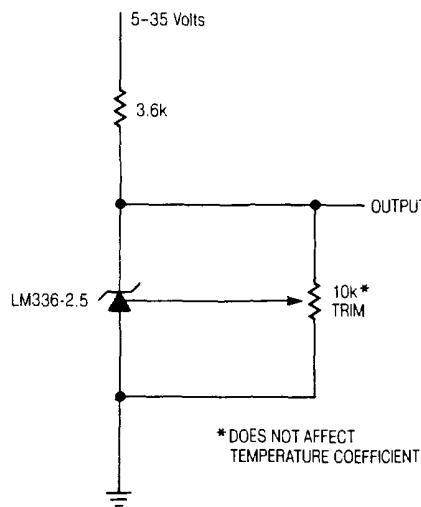



Reverse Voltage Change

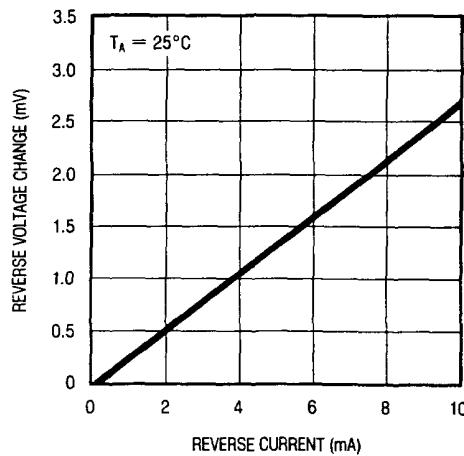

ABSOLUTE MAXIMUM RATINGS

Reverse Current	15mA
Forward Current.....	10mA
Operating Temperature Range	
LM136-2.5	-55°C to 125°C
LM336-2.5	0°C to 70°C
Storage Temperature Range	
LM136-2.5	-65°C to 150°C
LM336-2.5	-65°C to 150°C
Lead Temperature (Soldering, 10 sec.).....	300°C

PACKAGE/ORDER INFORMATION

BOTTOM VIEW 	LM136H-2.5 LM136AH-2.5 LM336H-2.5 LM336BH-2.5 *SEE NOTE 1
BOTTOM VIEW 	LM336Z-2.5 LM336BZ-2.5 *SEE NOTE 1

ELECTRICAL CHARACTERISTICS (See Note 1)

SYMBOL	PARAMETER	CONDITIONS	LM136A/LM136			LM336B/LM336			UNITS
			MIN	TYP	MAX	MIN	TYP	MAX	
V _Z	Reverse Breakdown Voltage	T _A = 25°C, I _R = 1mA LM136/LM336 LM136A/LM336B	2.440	2.490	2.540	2.390	2.490	2.590	V
			2.465	2.490	2.515	2.440	2.490	2.540	V
$\frac{\Delta V_Z}{\Delta I_R}$	Reverse Breakdown Change with Current	400μA < I _R < 10mA T _A = 25°C T _{min} ≤ T _A ≤ T _{max}	●	2.6 3	6 10	2.6 3	10 12	10 12	mV mV
r _Z	Reverse Dynamic Impedance	I _R = 1mA T _A = 25°C T _{min} ≤ T _A ≤ T _{max}	●	0.2 0.4	0.6 1	0.2 0.4	1.0 1.4	1.0 1.4	Ω Ω
$\frac{\Delta V_Z}{\Delta \text{Temp}}$	Temperature Stability	V _R adjusted to 2.490V, I _R = 1mA T _{min} ≤ T _A ≤ T _{max} LM136A/LM136 LM336B/LM336 (See Figure 1)	● ●	12	18	1.8	6	6	mV mV
$\frac{\Delta V_Z}{\Delta \text{Time}}$	Long Term Stability	T _A = 25°C ± 0.1°C, I _R = 1mA		20		20		20	ppm/kHr

The ● denotes the specifications which apply over full operating temperature range.

Adjusting the LM336 for minimum temperature coefficient

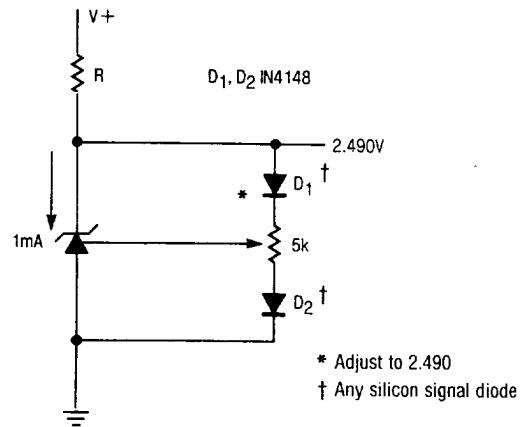
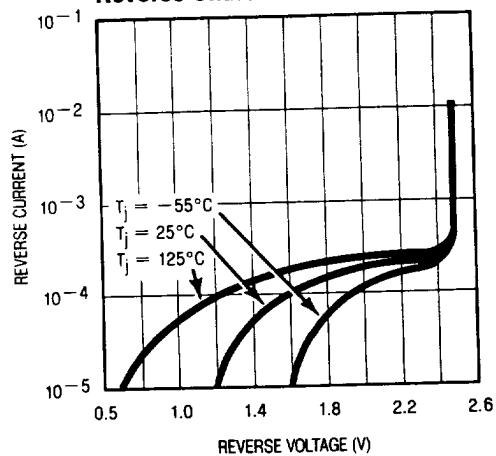
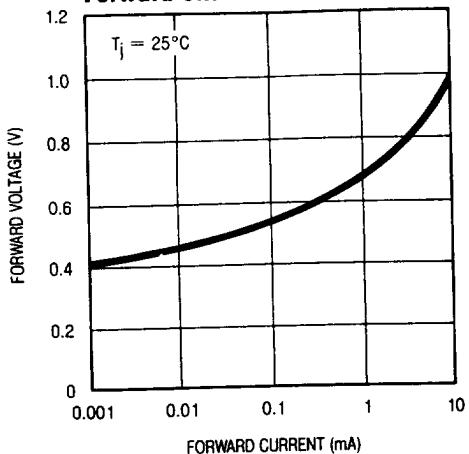
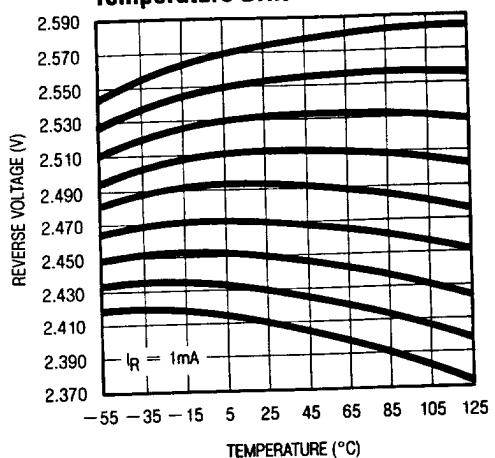
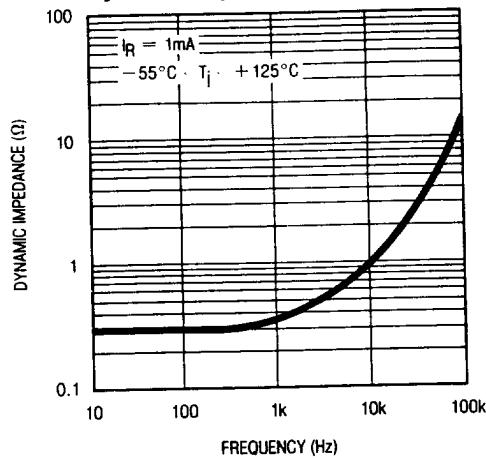
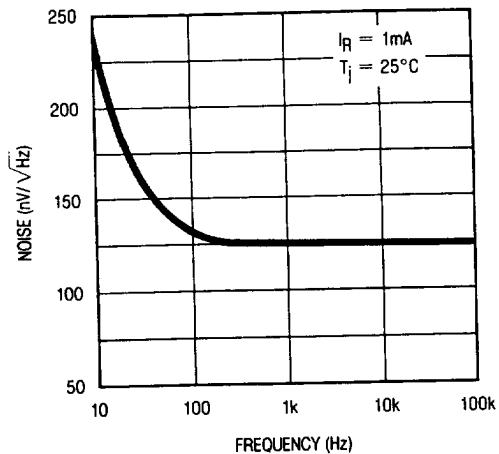
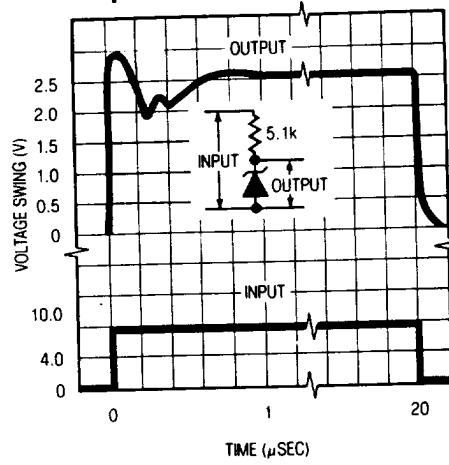
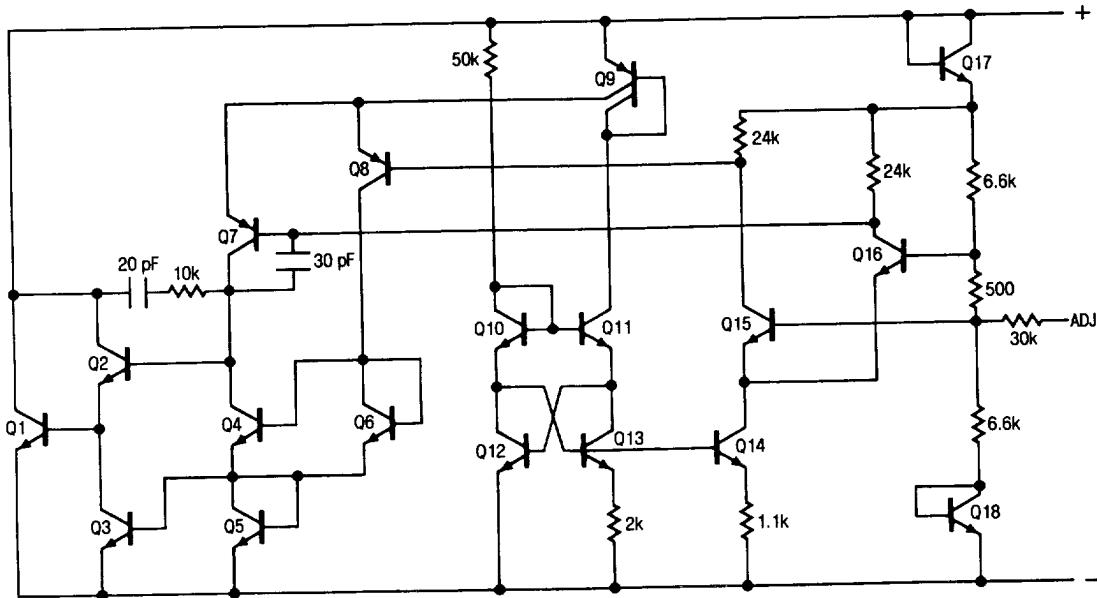



Figure 1

TYPICAL PERFORMANCE CHARACTERISTICS**Reverse Characteristics****Forward Characteristics****Temperature Drift****Dynamic Impedance****Zener Noise Voltage****Response Time****SCHEMATIC DIAGRAM**


LM136-2.5/LM336-2.5

TYPICAL APPLICATIONS


Wide Supply Range, Reference

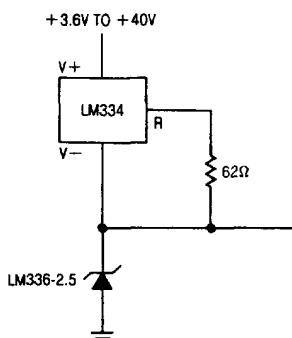


Switchable $\pm 1.25V$ Bipolar Reference

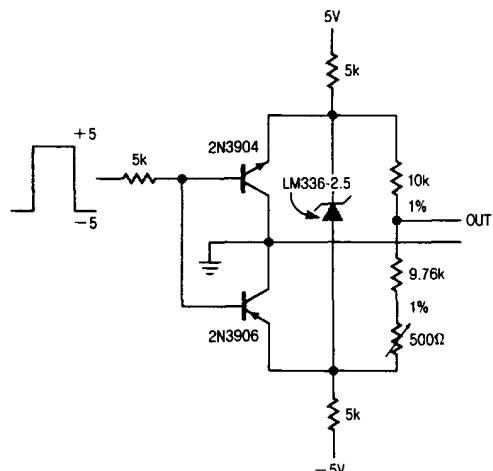

Low Temperature Coefficient Power Regulator

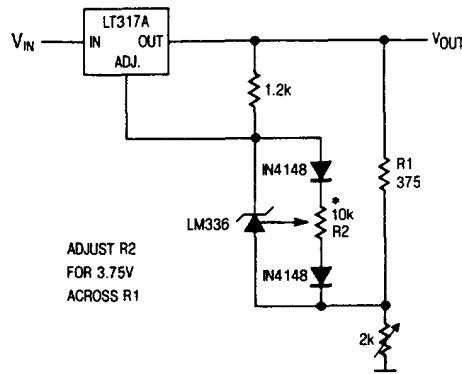


Low Noise 2.5V Buffered Reference

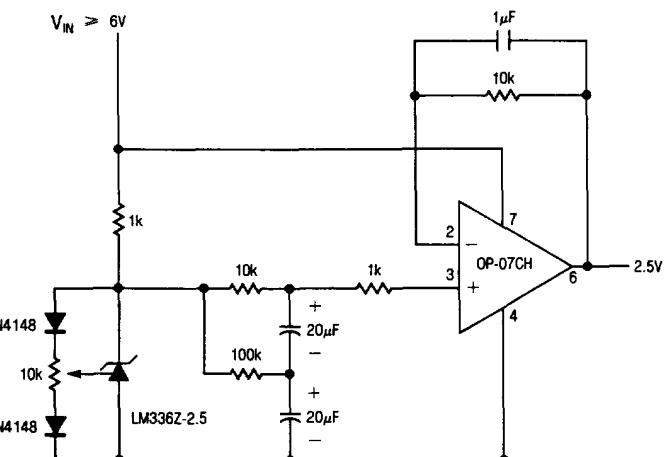

PACKAGE DESCRIPTION

H Package, 3 Lead TO-46 Metal Can

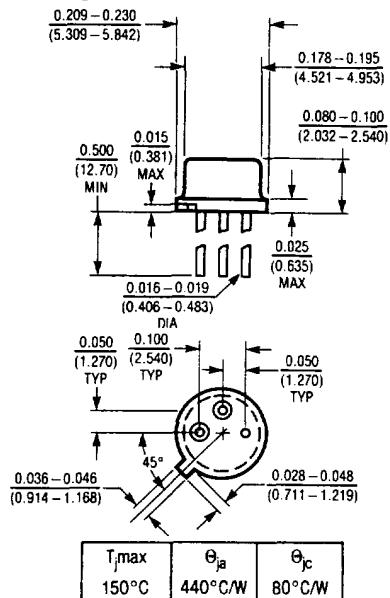

Z Package, 3 Lead TO-92 Plastic

