


SMT Termination and Attenuator

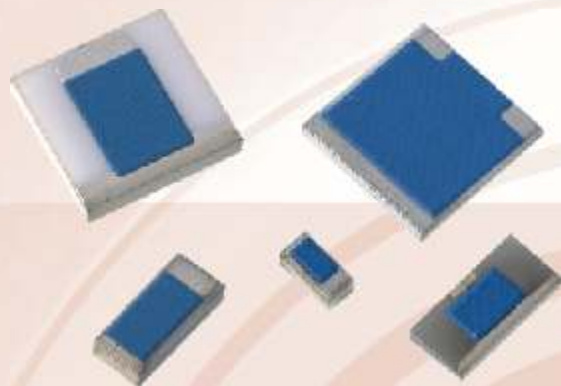


Radiall Microwave product line is pleased to introduce SMT resistive load and attenuator, suitable for surface mount applications. The small size and low cost components can be used in many applications such as coupler loads, drop-in isolators or other wireless applications...

The product is designed for 50 application for wireless band up to 3 GHz and also 18 GHz using Al₂O₃ or AlN substrate, power range from 10 Watts to 120 Watts. Packaged in reels for easy circuit integration, thanks to the use of pick and place machines. Soldering operation can be achieved by reflow ovens. Available in standard dimensions offered in the industry, such as 2.54 x 5.08mm, 6.35 x 6.35mm or 6.35 x 9.40mm.

Radiall offers a large connectorized termination and attenuator range. The SMT termination and attenuators broadens our offering in the RF components market.


Characteristics

Impedance	: 50 ±5%
Attenuation value	: 3, 6, 10 & 20dB
Temperature range	: -55°C / +150°C
Substrate material	: Al ₂ O ₃ and AlN
Resistive film	: Thick film
Finish	: Polymer film / contacts Pt

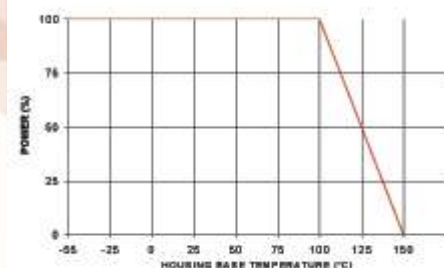

AlN Termination

Part number	Packaging	Power (Watts)	Frequency (GHz)	VSWR Max	W	L	H	Wc	Lc
R401220105	100pcs	10	18	1.35	5.08	2.54	0.635	1.3	0.5
R401220102	2000pcs								
R401210105	100pcs	10	3	1.20	2.54	5.08	1.2	2.54	0.5
R401210102	2000pcs								
R401211105	100pcs	20	2.5	1.25	6.35	6.35	1.2	3.1	0.75
R401211102	2000pcs								
R401410105	100pcs	60	2.5	1.20	8.89	5.84	1.0	3.35	0.75
R401410102	2000pcs								
R401411105	100pcs	120	2.5	1.20	6.35	9.4	1.0	1.8	1.0
R401411102	2000pcs								

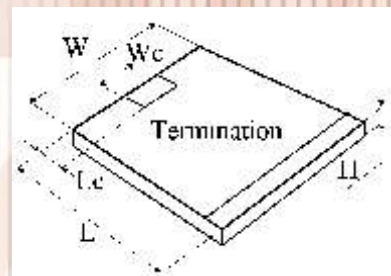


Al₂O₃ Termination

Part number	Packaging	Power (Watts)	Frequency (GHz)	VSWR Max	W	L	H	Wc	Lc
R401110005	100pcs	2	4	1.20	1.27	2.54	1.0	1.27	0.75
R401110002	2000pcs								
R401210005	100pcs	10	2.5	1.25	6.35	6.35	1.0	3.10	0.75
R401210002	2000pcs								
R401211005	100pcs	30	2.5	1.20	6.35	6.35	1.0	3.17	0.9
R401211002	2000pcs								
R401310005	100pcs	50	2.5	1.20	9.4	6.35	1.0	3.0	0.75
R401310002	2000pcs								

See technical data sheet for more details

Al₂O₃ Attenuator

Part number	Packaging	Att (dB)	Power (Watts)	Frequency (GHz)	VSWR Max	W	L	H	Wc	Lc
R421103005	100pcs	3±0.3	3	2	1.20	1.27	2.54	0.635	2.0	2.1
R421103002	2000pcs									
R421106005	100pcs	6±0.3	3	2	1.20	6.35	6.35	0.635	2.0	2.1
R421106002	2000pcs									
R421110005	100pcs	10±0.3	3	2	1.20	6.35	6.35	0.635	2.0	2.1
R421110002	2000pcs									
R421420105*	100pcs	20±0.5	60	2.2	1.20	9.4	6.35	0.635	0.70	1.8
R421420102	2000pcs									

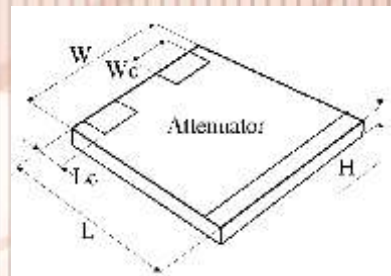

*AlN product


See technical data sheet for more details

ISO 9001 APPROVED



www.radiall.com

All dimensions are given in mm

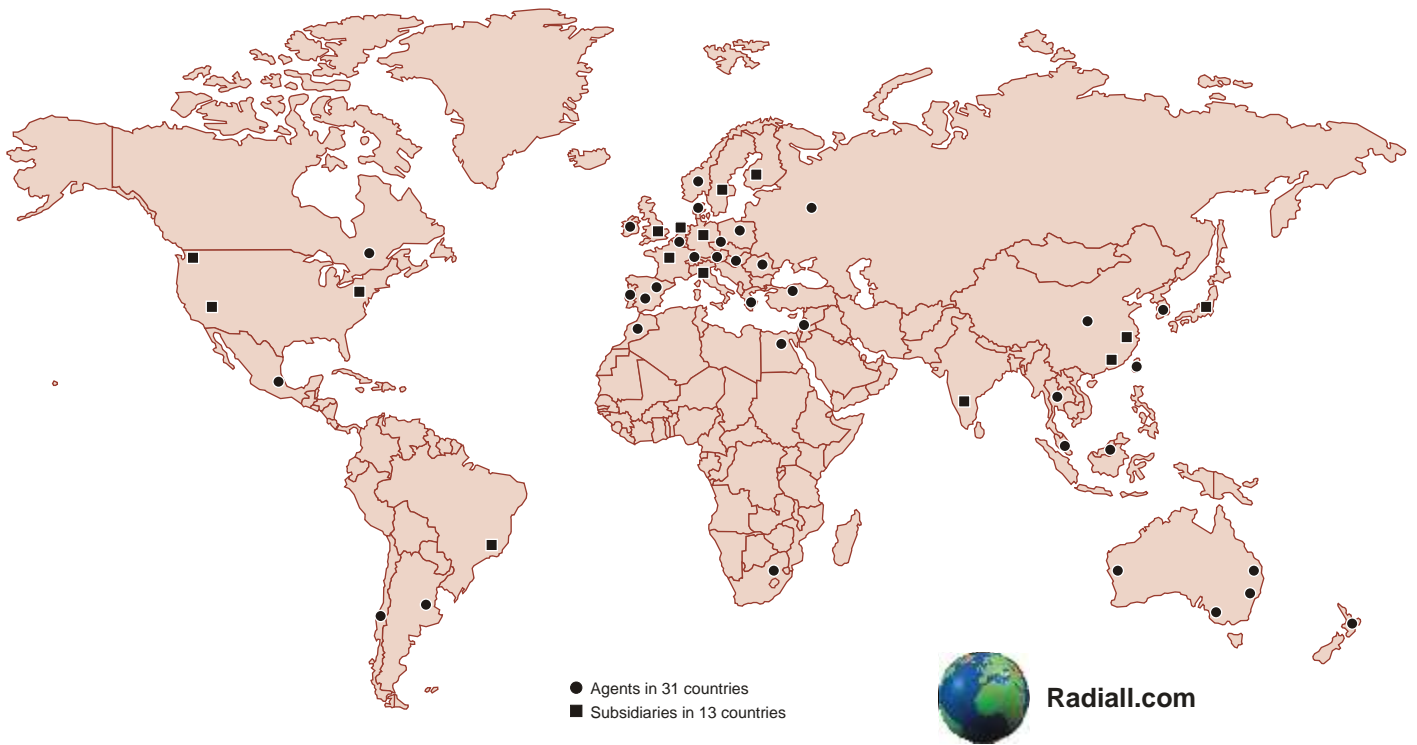

● Agents in 31 countries
 ■ Subsidiaries in 13 countries



Radiall.com

RADIALL WORLDWIDE LOCATIONS

EUROPE

France - RADIALL HEADQUARTERS

101, Rue Ph. Hoffmann - 93116 ROSNY sous BOIS (Paris)
 Tel. : +33 1 49 35 35 35 Fax : +33 1 48 54 63 63
 E-Mail : info@radiall.com

Finland - RADIALL FIN

Pilot Business Park - Lentokatu 2 - FIN-90460 OULUNSALO
 Tel. : +358 852 70 130 Fax : +358 852 70 105
 E-Mail : info@radiall.fi

Germany - RADIALL GmbH

Carl-Zeiss Str. 10 Postfach 200143 - D63307 RÖDERMARK (Frankfurt)
 Tel. : +49 60 74 91 07 0 Fax : +49 60 74 91 07 70
 E-Mail : info@radiall.de
 Regional office : Munich

Italy - RADIALL Elettronica S.R.L.

Via Concordia, 5 - I20090 ASSAGO MILANO
 Tel. : +39 02 48 85 121 Fax : +39 02 48 84 30 18
 E-Mail : radiall@tin.it
 Regional office : Roma

Netherlands - RADIALL B.V.

Postbus 64 - 3870 CB HOEVELAKEN
 Tel. : +31 33 253 40 09 Fax : +31 33 253 45 12
 E-Mail : info@radiall.nl

Sweden - RADIALL A.B.

Sjöängsvägen 2 - SE-192 72 SOLLENTUNA (Stockholm)
 Tel. : +46 844 434 10 Fax : +46 875 449 16
 E-Mail : info@radiall.se

U.K. - RADIALL Ltd

10, Perivale Industrial Park, Horsenden Lane south
 PERIVALE Middlesex UB6 7RL (London)
 Tel. : +44 208 991 7700 Fax : +44 208 991 7769
 E-Mail : info@radiall.co.uk

AMERICA

USA - RADIALL (RF Interconnect Product)

*RF Microwave Connectors & Cable Assemblies, Microwave Switches & Devices,
 Fiber Optic Connectors*
 102 W. Julie Drive - TEMPE, Arizona 85283
 Tel. : +1 480 730 5700 Fax : +1 480 730 5800
 E-Mail : sales@radiallusa.com

USA - RADIALL (Antenna Product)

Antennas for Automotive, Military & Wireless communications (LARSEN Product)
 3611 NE 112nd Avenue - VANCOUVER, Washington 98682
 Tel. : +1 360 944 7551 Fax : +1 360 944 7556
 E-Mail : info@radiallarsen.com

USA - RADIALL (High Reliability Product)

Multicontact Connectors, Filtered Connectors (JERRIK Product)
 102 W. Julie Drive - TEMPE, Arizona 85283
 Tel. : +1 480 730 5700 Fax : +1 480 730 5800
 E-Mail : sales@radialljerrick.com

Brazil - RADIALL do Brasil

Largo do Machado, 54 sala 706 - Catete
 22221-020 RIO DE JANEIRO
 Tel. : +55 21 2558 05 76 Fax : +55 21 2245 97 63
 E-Mail : hubertm@radiall.com.br

ASIA

China - SHANGHAI RADIALL Electronic Co., Ltd

N° 390 Yong He Road 200072 - SHANGHAI
 Tel. : +86 21 66 52 37 88 Fax : +86 21 66 52 11 77
 E-Mail : radialls@online.sh.cn

Japan - NIHON RADIALL KK

1-3-10, Higashi nihonbashi, Chuokku, TOKYO 103-0004
 Tel. : +81 3 3866 23 90 Fax : +81 3 3866 23 91
 E-Mail : emiko@radiall.co.jp

HongKong - RADIALL Electronics Ltd

Elite Industrial Centre, Room 212, 2/F
 N° 883 Cheung Sha Wan Road - KOWLOON HONG KONG
 Tel. : +852 29 59 38 33 Fax : +852 29 59 26 36
 E-Mail : info@radiall.com.hk

India - RADIALL PROTECTRON

25 D, II Phase, Peenya Industrial Area - BANGALORE 560058
 Tel. : +91 80 83 95 271 Fax : +91 80 83 97 228
 E-Mail : radiall@vsnl.com

REPRESENTED IN

Africa	Israël	South Africa
Australia	Middle East	South Korea
Belgium	Poland	Switzerland
Greece	Spain	Turkey

For the above countries, please contact the local agent or RADIALL HEADQUARTERS at export@radiall.com

March 2004 Edition



Registered Trade Mark 

This information is intended as a guide only. To ensure a continuing policy of product improvement, Radiall reserves the right to modify its specifications without prior notification.