


C-MOS QUAD SPST ANALOG SWITCH

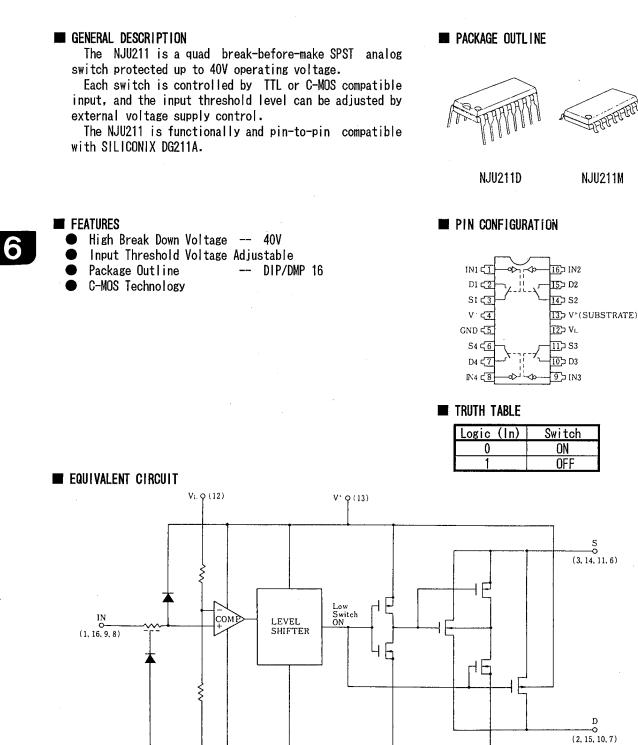

* Logic input threshold voltage $V_{\rm TH}$ is about $V_{\rm L}$ x 0.384(V). When the designing, enough margin is required.

V- 0 (4)

New Japan Radio Co., Ltd.

Downloaded from <u>Elcodis.com</u> electronic components distributor

6-4

GND 0 (5)

TERMINAL DESCRIPTION

No.	SYMBOL	FUNCTION	No.	SYMBOL	FUNCTION		
1	IN1	Control Signal Input	9	I N3	Control Signal Input		
2	D1	1t. (0tt. 1	10	D3			
3	S1	Input/Output 1	11	S3	Input/Output 3		
4	V-	Negative (V ⁻) Power Supply	12	VL	Threshold Level Control Voltage Supply		
5	GND	Ground	13	V+	Positive (V ⁺) Power Supply		
6	S4	Lucut (Output A	14	S2	Lunut (Output 0		
7	D4	Input/Output 4	15	D2	Input/Output 2		
8	IN4	Control Signal Input	16	1 N2	Control Signal Input		

■ ABSOLUTE MAXIMUM RATINGS

		(Ta=25℃	
PARAMETER	SYMBOL	RATINGS	UNIT	
	$V^{+} - V^{-}$	40		
Supply Voltage	V ⁺ - GND	19	۷	
	GŅD − V [−]	25		
Threshold Control Voltage	V _L - GND	-0.5 ~ V⁺+0.5 *		
Input Voltage	V _I ,V _S ,V _D	V-0.5 \sim V++0.5 *	٧	
	11	30		
Input Current	ls,l⊳ Continuous	20	mA	
	Peak Value (PW=1ms,Duty0.1)	70		
Power Dissipation	Po	500 (DIP) 200 (DMP)	mW	
Operating Temperature Range	Topr	0 ~+ 70	ീ	
Storage Temperature Range	Tstg	- 65 ~ + 125	C	

* V⁺+0.5V must be 40V or less.

·6-5

-New Japan Radio Co., Ltd.–



ELECTRICAL CHARACTERISTICS (DC CHARACTERISTICS)

ELECTRICAL CHARACTERISTICS (DC CHARACTERISTICS)				(V+=15V , V-=-15V , GND=OV , V_L=5V)					
		CONDITIONS		ТҮР	MAX			UNIT	
PARAMETER	SYMBOL			25℃	0°C	25℃	70 ℃		
Analog Signal Range	Vanalog			± 15		±15	± 15	۷	
		V _{IN} =0.8V	V _D =10V	105		175		Ω	
On-state Resistance	Ron	ls = −1mA	V _D =-10V	115		175			
Source-off	l₅(off)		V_{s} =14V, V_{D} =-14V	0.01		5		nA	
Leakage Current		V₁=2.4V	V_{s} =-14V, V_{D} =14V	-0.02		- 5			
Drain-off Leakage Current	I⊳(off)	V1=2.4V	V _D =14V,V _S =-14V	0.01		5		nA	
			V_{D} =-14V, V_{S} =14V	-0.02		- 5			
Drain-on	l∍(on)	1) V1=0.8V	V _D =V _s =14V	0.1		5		nA	
Leakage Current			V _D =V _S =-14V	-0.15		- 5			
	Іін	V 1=2.4V V 1=15V		-0.0004		- 1		μA	
Input Current				0.003		1			
	I IL	V1=0V		-0.0004		- 1			
	+			0.35		0.68			
Quiescent Current	-	V1=0 or 2.4V		0.30		0.68		mA	
· · · · ·	1.			0.5		1.2			

6

SWITCHING CHARACTERISTICS

($V^+{=}15V$, $V^-{=}{-}15V$, GND=0V , $V_{\rm L}{=}5V$)

		CONDITIONS		ТҮР	MAX							
PARAMETER	SYMBOL			25℃	℃ 0	25 ℃	70℃	UNIT				
Turn-on Time	ton	- R⊥=1kΩ, C⊥=35pF		460		1000		ns				
Turn-off Time	toff			360		500						
Charge Injection	Q	$\begin{array}{l} C_{\rm L} = 1000 \text{pF}, \ \text{V}_{\rm GEN} = 0 \text{V}, \\ R_{\rm GEN} = 0 \Omega \end{array}$		20				Эq				
Source-Off Capacit.	$C_{s}(off)$		Vs=0V, V1=5V	5								
Drain-Off Capacit.	C _D (off)						$V_{\rm D}$ =0V, $V_{\rm I}$ =5V	5				рF
Channel-On Capacitance	C⊡(on) +Cs(on)	f=100kHz	V _D =V _S =0V, V ₁ =0V	16				ΡΓ				
Off Isolation	OIRR	-			N -0V	70				dB		
Channel-to-channel Crosstalk	CCRR		Vs=2V _{P-P} , RL=75Ω	90								

-New Japan Radio Co.,Ltd.–

6-6

MEMO

[CAUTION] The specifications on this databook are only given for information , without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

New Japan Radio Co., Ltd.