



iT3017

5 Gb/s High-Sensitivity Limiter Amplifier

Description

The iT3017 is a limiting amplifier for use as a post amplifier in optical receivers. Signals as small as +/-7 mVpp differential can be amplified to 1.28 Vpp differential. Offset correction and output voltage control are provided. Both AC and DC coupling are allowed at the input and output. The high sensitivity allows the device to be used at the output of a transimpedance amplifier.

Features

- ❖ 3-dB bandwidth: 5 GHz
- ❖ Differential gain: 42 dB
- ❖ Saturated output: 640 mVpp on each output into 50 ohms
- ❖ Single bias supply: -5.2 V
- ❖ Power consumption: 494 mW
- ❖ Bias current: 95 mA
- ❖ DC offset correction
- ❖ Amplitude voltage control
- ❖ Low RMS jitter
- ❖ Low-cost JEDEC QFP-N (MO-220) package

Absolute Maximum Ratings

Symbol	Parameters/conditions	Min.	Max.	Units
Vee1,2	Power supply voltage	-8	0	V
Vd	Applied voltage at data input (differential)		3	V
Vm	Applied voltage at data input (single ended)		1.5	V
Ioffset(+),(-)	Offset control current		5	mA
Tch	Maximum channel temperature		150	°C
Tstg	Storage temperature	-65	150	°C

Recommended Operating Conditions

Symbol	Parameters/conditions	Min.	Typ.	Max.	Units
Tc	Operating temperature range (Tcase)	0		85	°C
Vee1	Power supply voltage	-5.45	-5.2	-4.95	V
Vee2	Power supply voltage	-5.45	-5.2	-4.95	V
Iee1+Iee2	Total bias supply current	80	95	110	mA
Voffset (+)	Offset control voltage	-5		5	V
Voffset (-)	Offset control voltage	-5		5	V
Vctrl	Amplitude voltage control	-5.2		0	V
Vd	Applied peak to peak voltage at data input (differential)	7		1000	mV
Vm	Applied peak to peak voltage at data input (single ended)	14		1000	mV
	Input/output interface	AC and DC coupled			
Vinde	DC input voltage (with DC-coupled input)	-0.5		0.5	V

Electrical Characteristics





At ambient temperature
Vee1,2=-5.2 V

Symbol	Parameters/conditions	Min.	Typ.	Max.	Units
P	Power consumption	416	494	572	mW
G	Differential small signal gain	41	42		dB
B3dB	3 dB bandwidth	4.5	5		GHz
RLin	Input return loss (up to 10 GHz)	10	15		dB
RLout	Output return loss (up to 10 GHz)	12	15		dB
Vin	Input sensitivity diff. input (BER<1E-12, 2 ²³ -1PRBS, 5Gb/s)		4		mVpp
Vout	Output peak to peak voltage (either Q or /Q) (Vctrl=0V for max. output voltage)	590	640		mVpp
ΔVout	Vout sensitivity vs. bias (Vee=-5.2 V +/-5%)			+/-11	%
Voutdc	Output DC voltage (DC coupled to 50 ohm load)	-450	-350	-250	mV
Trse	Rise time (20% - 80%)		30	40	ps
Tfse	Fall time (20% - 80%)		30	40	ps
Jpp	Jitter peak to peak		6	11	ps

S-Parameter Data

(Measured on connectorized evaluation board)


Vee1 = Vee2 = -5.2 V
Iee1+Iee2 = 95 mA

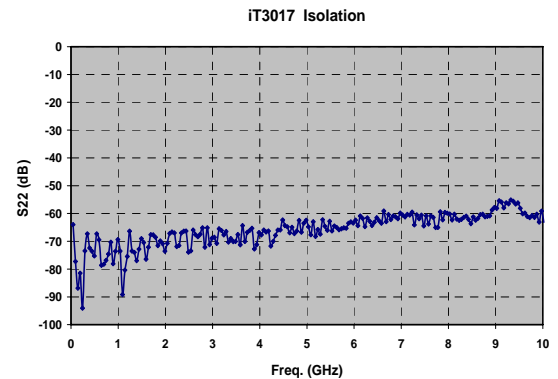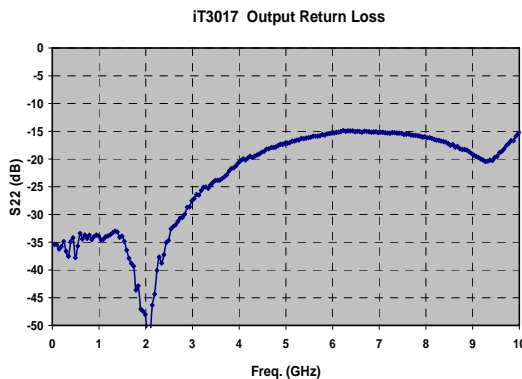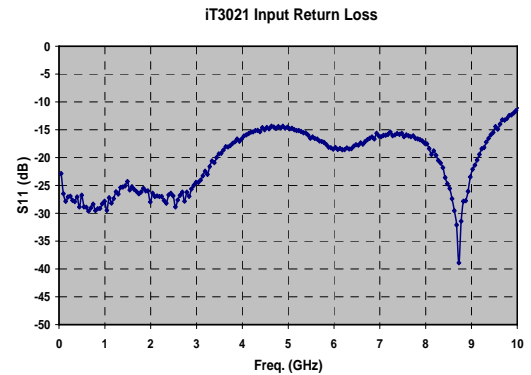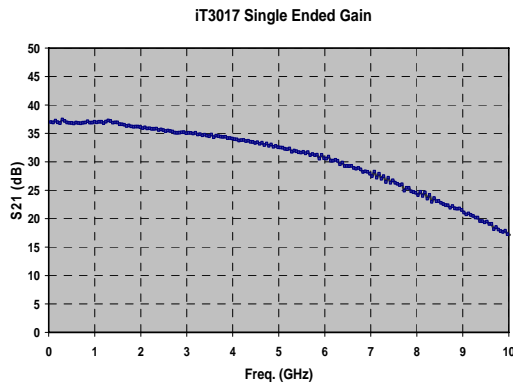


iT3017 5 Gb/s High-Sensitivity Limiter Amplifier

Eye Diagram Performance


Vee1 = Vee2 = -5.2 V
Iee1+Iee2 = 95 mA

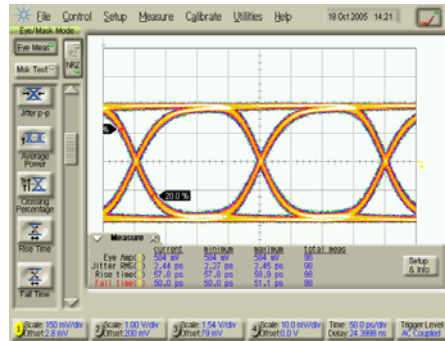


Bit rate: 5 Gb/s
Vin = +/-6 mVpp, Vout = +/-580 mVpp

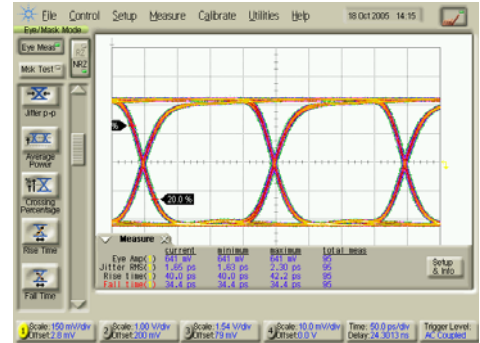


Bit rate: 5 Gb/s
Vin = +/-10 mVpp, Vout = +/-650 mVpp

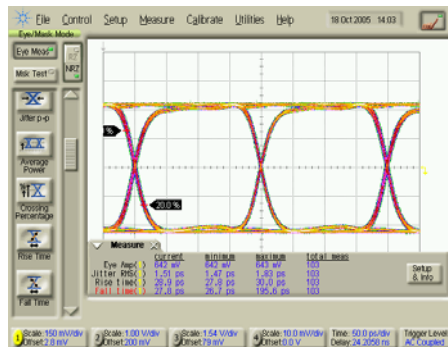


Bit rate: 5 Gb/s
Vin = +/-50 mVpp, Vout = +/-650 mVpp

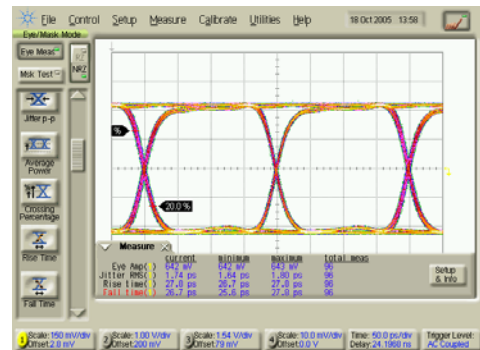

Bit rate: 5 Gb/s
Vin = +/-100 mVpp, Vout = +/-650 mVpp






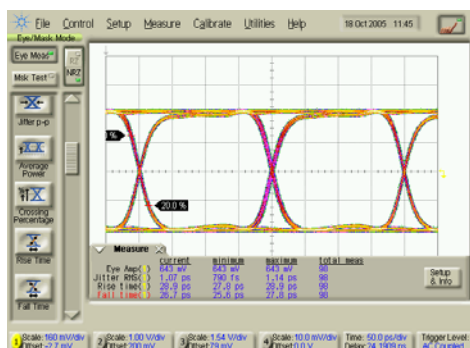


Bit rate: 5 Gb/s
Vin = +/-200 mVpp, Vout = +/-650 mVpp

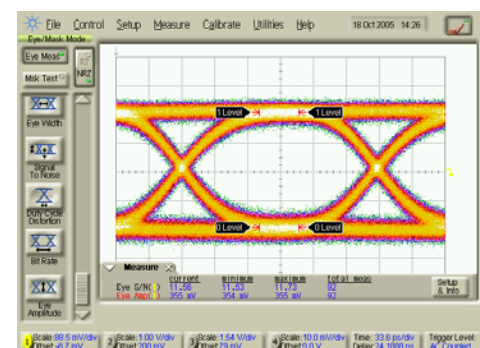




Input sensitivity = +/-3 mVpp differential input, 5 Gb/s
Output voltage = 355 mVpp single-ended

Performance As Function of Input Voltage

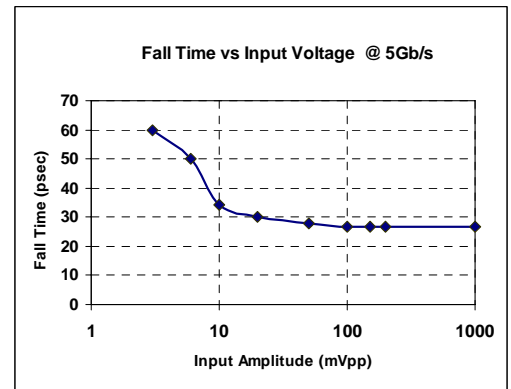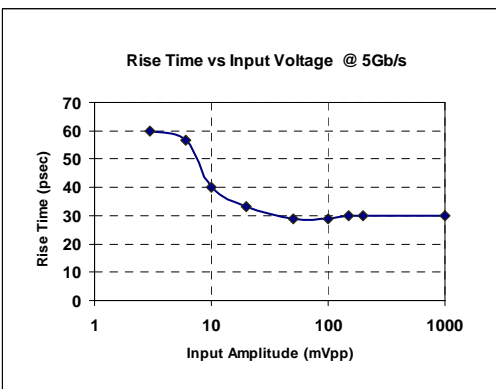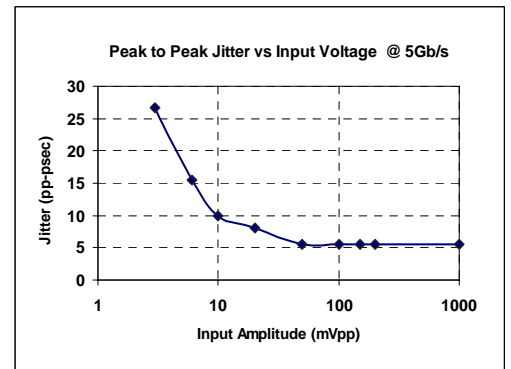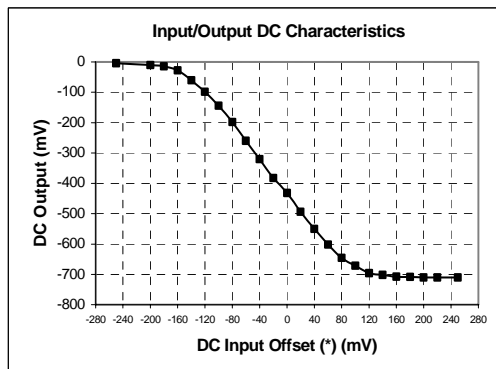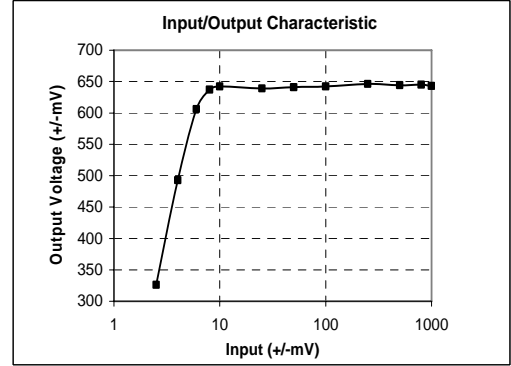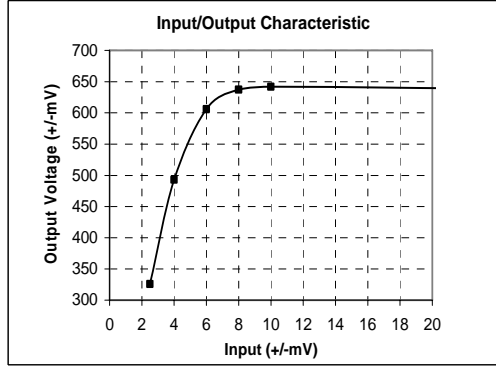


(*) Input applied to the offset control pin (Voffset1) and open output.

Output Voltage Control

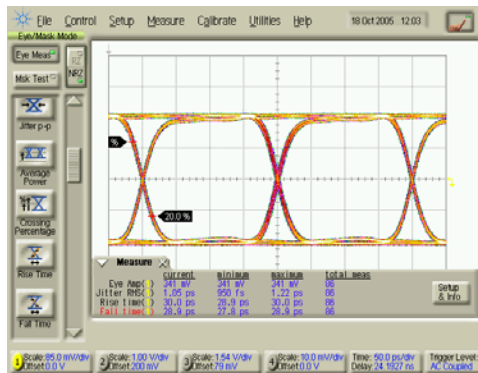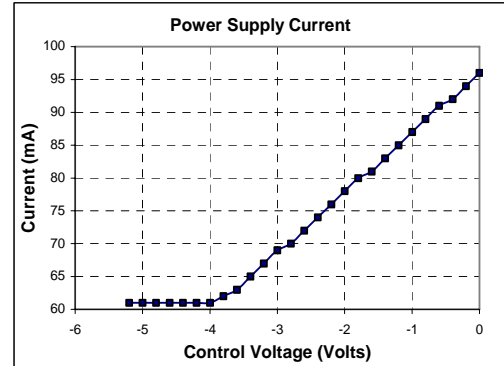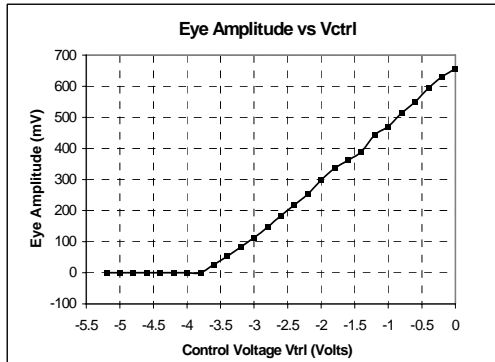

Bit rate: 2.5 Gb/s, Vctrl = -1.7 V
Vin = +/-200 mVpp, Vout = +/-340 mVpp

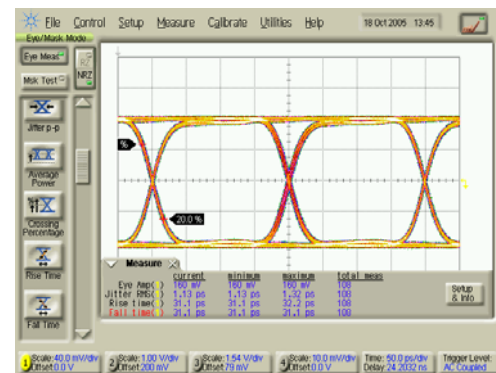


Bit rate: 2.5 Gb/s, Vctrl = -2.7 V
Vin = +/-200 mVpp, Vout = +/-160mVpp


Recommended Operational Setup

Apply -5.2 V at Vee1 and Vee2
Apply 0 V at Vctrl
for maximum output

DC blocking capacitors optional

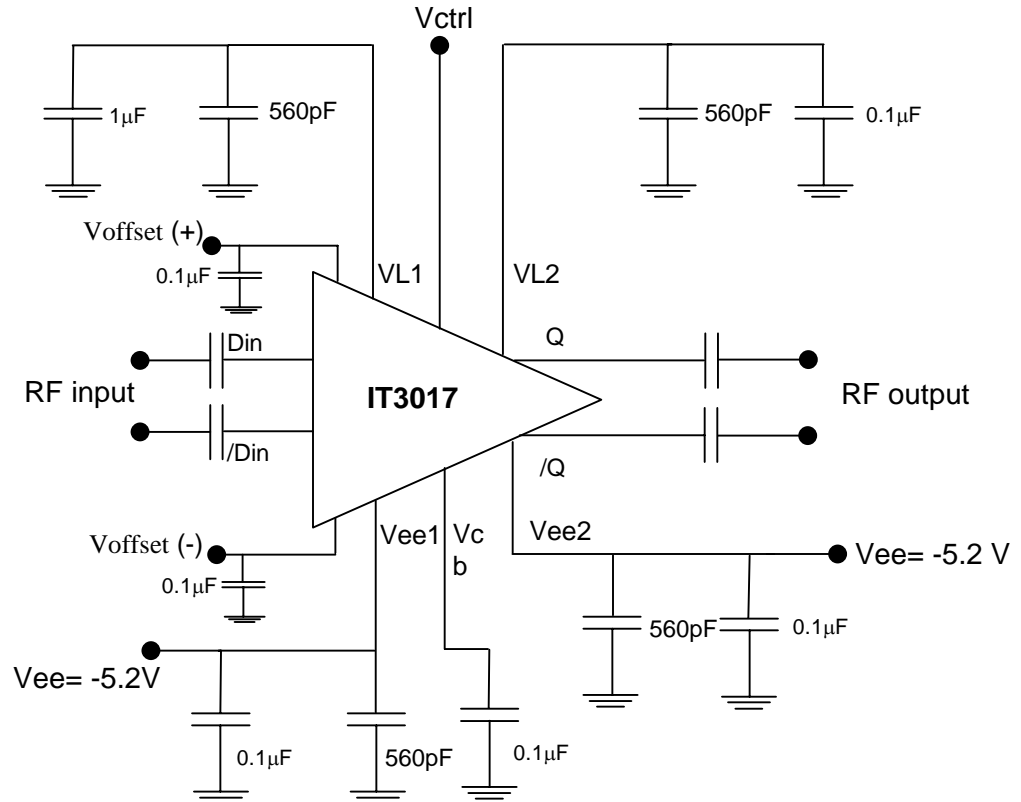

Package Drawings, Pinouts

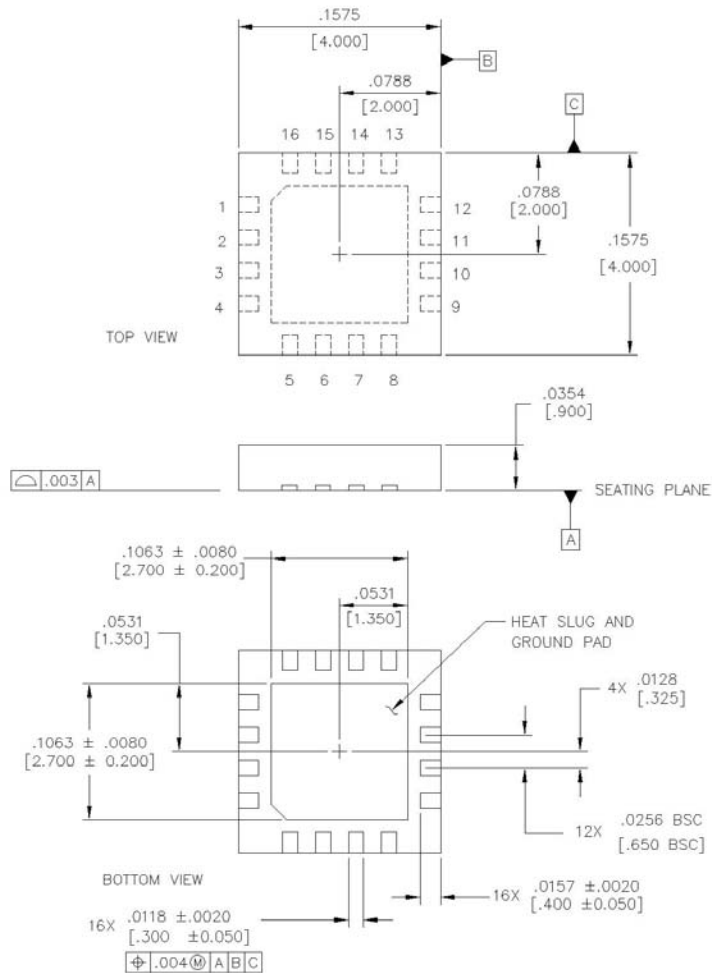

Pinouts:

P1: GND	P9: GND
P2: Din (RF input)	P10: /Q (/RF Out)
P3: /Din (/RF input)	P11: Q (RF Out)
P4: GND	P12: GND
P5: Voffset (-)	P13: VL1
P6: Vee1	P14: Vctrl (voltage control)
P7: Vcb	P15: VL2
P8: Vee2	P16: Voffset (+)

NOTES: (UNLESS OTHERWISE SPECIFIED)

1. DIMENSIONS: INCHES [mm]
2. EXCEPT WHERE NOTED, TOLERANCE ON DIMENSIONS ARE: $\pm \frac{.0039}{[0.100]}$