TOSHIBA TLP701

TOSHIBA Photocoupler GaAlAs IRED + Photo IC

# **TLP701**

Industrial inverters
Inverter for air conditioners
IGBT/Power MOS FET gate drive

TLP701 consists of a GaAlAs light-emitting diode and an integrated photodetector.

This unit is 6-lead SDIP package. The TLP701 is 50% smaller than the 8-pin DIP and meets the reinforced insulation class requirements of international safety standards. Therefore the mounting area can be reduced in equipment requiring safety standard certification.

The TLP701 is suitable for gate driving circuits for IGBTs or power MOSFETs. In particular, the TLP701 is capable of "direct" gate driving of low-power IGBTs.

Peak output current  $: \pm 0.6 \text{ A (max)}$ Guaranteed performance over temperature  $: -40 \text{ to } 100^{\circ}\text{C}$ Supply current : 2 mA (max)Power supply voltage : 10 to 30 VThreshold input current  $: I_{\text{FLH}} = 5 \text{ mA (max)}$ Switching time  $(t_{\text{PLH}} / t_{\text{PHL}})$  : 700 ns (max)Common mode transient immunity  $: \pm 10 \text{ kV/µs (min)}$ Isolation voltage : 5000 Vrms (min)

· Construction mechanical rating

	7.62-mm pitch standard type	10.16-mm pitch TLPXXXF type
Creepage Distance	7.0 mm (min)	8.0 mm (min)
Clearance	7.0 mm (min)	8.0 mm (min)
Insulation Thickness	0.4 mm (min)	0.4 mm (min)

UL Recognized : UL1577, File No. E67349

• Option (D4)

TÜV approved : EN60747-5-2


Certificate No. R50033433

Maximum operating insulation voltage : 890 Vpk Highest permissible over voltage : 8000 Vpk

( Note ) When a EN60747-5-2 approved type is needed, please designate the "Option(D4)"


### **Truth Table**


Input	LED	Tr1	Tr2	Output
Н	ON	ON	OFF	Н
L	OFF	OFF	ON	L

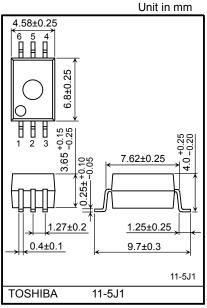

Weight: 0.26 g (typ.)

#### Pin Configuration (Top View)

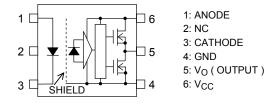



A 0.1- $\mu F$  bypass capacitor must be connected between pins 6 and 4. (See Note 6.)

#### Maximum Ratings (Ta = 25 °C)

	Characteristics	Symbol	Rating	Unit	
	Forward current	IF	20	mA	
	Forward current derating (Ta ≥ 85°C)		ΔI <sub>F</sub> /ΔTa	-0.54	mA/°C
LED	Peak transient forward current	(Note 1)	I <sub>FP</sub>	1	Α
	Reverse voltage		$V_{R}$	5	V
	Junction temperature		Tj	125	°C
	"H" peak output current	(Note 2)	I <sub>OPH</sub>	-0.6	Α
ō	"L" peak output current	(Note 2)	I <sub>OPL</sub>	0.6	Α
Detector	Output voltage		Vo	35	V
Ď	Supply voltage		V <sub>CC</sub>	35	V
	Junction temperature		Tj	125	°C
Ope	rating frequency	(Note 3)	f	25	kHz
Ope	Operating temperature range		T <sub>opr</sub>	-40 to 100	°C
Storage temperature range			T <sub>stg</sub>	-55 to 125	°C
Lead	Lead soldering temperature (10 s) (Note 4)		T <sub>sol</sub>	260	°C
Isola	tion voltage (AC, 1 minute, R.H. ≤ 60%)	(Note 5)	BVS	5000	Vrms

Note 1: Pulse width  $P_W \le 1 \mu s$ , 300 pps

Note 2: Exponential waveform pulse width  $P_W \le 2 \mu s$ ,  $f \le 15 \text{ kHz}$ 

Note 3: Exponential waveform  $I_{OPH} \le -0.3 \text{ A} \ (\le 2 \ \mu\text{s}), I_{OPL} \le +0.3 \text{ A} \ (\le 2 \ \mu\text{s}), Ta = 100 \ ^{\circ}\text{C}$ 

Note 4: For the effective lead soldering area

Note 5: Device considered a two-terminal device: pins 1, 2 and 3 paired with pins 4, 5 and 6 respectively.

Note 6: A ceramic capacitor  $(0.1 \, \mu F)$  should be connected from pin 6 to pin 4 to stabilize the operation of the high gain linear amplifier. Failure to provide the bypassing may impair the switching property. The total lead length between capacitor and coupler should not exceed 1 cm.

## **Recommended Operating Conditions**

Characteristics		Symbol	Min	Тур.	Max	Unit
Input current, ON	(Note 7)	I <sub>F (ON)</sub>	7.5	_	10	mA
Input voltage, OFF		V <sub>F (OFF)</sub>	0	_	0.8	V
Supply voltage		V <sub>CC</sub>	10	_	30	V
Peak output current		I <sub>OPH</sub> / I <sub>OPL</sub>	_	_	± 0.2	Α
Operating temperature		T <sub>opr</sub>	-40	_	100	°C

Note 7: Input signal rise time (fall time)  $< 0.5~\mu s.$ 

## Electrical Characteristics (Ta = -40 to 100 °C, unless otherwise specified)

Characteristics	i	Symbol	mbol Test Condition		Min	Тур.*	Max	Unit	
Forward voltage		V <sub>F</sub>	_	I <sub>F</sub> = 5 mA, Ta = 25 °C		_	1.55	1.70	V
Temperature coefficient of forward voltage		ΔV <sub>F</sub> /ΔTa	_	I <sub>F</sub> = 5 mA	I <sub>F</sub> = 5 mA		-2.0	_	mV/°C
Input reverse current		I <sub>R</sub>	_	V <sub>R</sub> = 5 V, Ta = 25	°C	_	_	10	μΑ
Input capacitance		C <sub>T</sub>		V =0 V, f = 1 MHz	, Ta = 25 °C		45	_	pF
	"H" Level	I <sub>OPH1</sub>	1	V <sub>CC</sub> = 15 V	V <sub>6-5</sub> = 4 V	-0.2	-0.38	_	- A
Output current	n Level	I <sub>OPH2</sub>	·	$I_F = 5 \text{ mA}$	V <sub>6-5</sub> = 10 V	-0.4	-0.60	_	
(Note 8)	"L" Level	I <sub>OPL1</sub>	2	v <sub>CC</sub> = 15 V	V <sub>5-4</sub> = 2 V	0.2	0.36	_	
	L Level	I <sub>OPL2</sub>	2	$I_F = 0 \text{ mA}$	V <sub>5-4</sub> = 10 V	0.4	0.62	_	
Output voltage	"H" Level	V <sub>OH</sub>	3	V <sub>CC</sub> = 10 V	$I_O = -100 \text{ mA},$ $I_F = 5 \text{ mA}$	6.0	8.5	_	<b>&gt;</b>
Output Voltage	"L" Level	V <sub>OL</sub>	4	ACC = 10 A	$I_O = 100 \text{ mA},$ $V_F = 0.8 \text{ V}$		0.4	1.0	V
Cupply ourrent	"H" Level	Icch	5	V <sub>CC</sub> = 10 to 30 V	I <sub>F</sub> = 10 mA		1.4	2.0	mA
Supply current	"L" Level	I <sub>CCL</sub>	6	V <sub>O</sub> =Open	I <sub>F</sub> = 0 mA	_	1.3	2.0	
Threshold input current	$L \rightarrow H$	I <sub>FLH</sub>	_	V <sub>CC</sub> = 15 V, V <sub>O</sub> > 1 V		_	2.5	5	mA
Threshold input voltage	$H \rightarrow L$	VFHL		V <sub>CC</sub> = 15 V, V <sub>O</sub> < 1 V		0.8	_	_	V
Supply voltage		V <sub>CC</sub>	_	_	_	10	_	30	V

<sup>(\*):</sup> All typical values are at Ta = 25°C

Note 8: Duration of lo time  $\leq$  50  $\mu$ s, 1 pulse

Note 9: This product is more sensitive than conventional products to electrostatic discharge (ESD) owing to its low power consumption design.

It is therefore all the more necessary to observe general precautions regarding ESD when handling this component.

## Isolation Characteristics (Ta = 25 °C)


Characteristic	Symbol	Test Condition	Min.	Тур.	Max.	Unit
Capacitance input to output	Cs	V = 0 V , f = 1MHz (Note 5)	_	1.0	_	pF
Isolation resistance	R <sub>S</sub>	R.H. ≤ 60 %, V <sub>S</sub> = 500 V (Note 5)	1×10 <sup>12</sup>	10 <sup>14</sup>	_	Ω
Isolation voltage		AC, 1 minute	5000	_	_	Vrms
	$BV_S$	AC, 1 second, in oil	_	10000	_	VIIIIS
		DC, 1 minute, in oil	_	10000	_	Vdc

# Switching Characteristics (Ta = −40 to 100 °C, unless otherwise specified)


Characteristics Symbol Test Circuit Test Condition		Min	Тур.*	Max	Unit				
Propagation delay time	$L\toH$	tpLH		Vcc = 30 V	$I_F = 0 \rightarrow 5 \text{ mA}$	100	_	700	
	$H \rightarrow L$	tpHL			$I_F = 5 \rightarrow 0 \text{ mA}$	100	_	700	
Output rise time (10–90 %)		tr	7	$R_g = 47 \Omega$	$I_F = 0 \rightarrow 5 \text{ mA}$	_	50	_	ns
Output fall time (90–10 %)		t <sub>f</sub>			$I_F = 5 \rightarrow 0 \text{ mA}$	_	50	_	
Switching time dispersion between ON and OFF		tрнц-tрцн	IF		I <sub>F</sub> = 0 , 5 mA	-500		500	
Common mode transient i at HIGH level output	mmunity	CM <sub>H</sub>	V <sub>CM</sub> =1000 Vp-p	$I_F = 5 \text{ mA}$ $V_{O \text{ (min)}} = 26 \text{ V}$	-10000	_	_	V/μs	
Common mode transient i at LOW level output	mmunity	CML	8	Ta = 25 °C	$I_F = 0 \text{ mA}$ $V_{O \text{ (max)}} = 1 \text{ V}$	10000	_	_	ν/μS

<sup>( \* ):</sup> All typical values are at Ta = 25 °C.


Test Circuit 1: IOPH




Test Circuit 2: IOPL




Test Circuit 3: V<sub>OH</sub>




Test Circuit 4: V<sub>OL</sub>




Test Circuit 5: I<sub>CCH</sub>

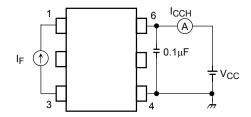


Test Circuit 6: I<sub>CCL</sub>




# Test Circuit 7: t<sub>pLH</sub>, t<sub>pHL</sub>, t<sub>r</sub>, t<sub>f</sub>, PDD

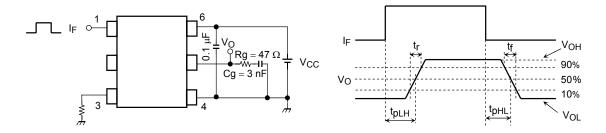



## Test Circuit 8: CM<sub>H</sub>, CM<sub>L</sub>

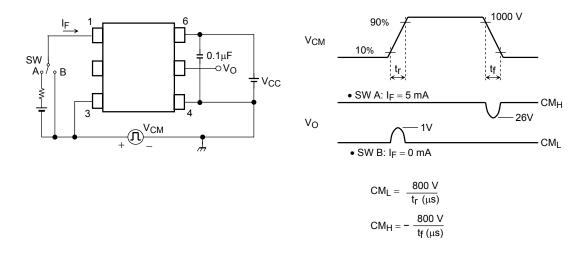



 $\text{CM}_{\text{L}}$  (CM<sub>H</sub>) is the maximum rate of rise (fall) of the common mode voltage that can be sustained with the output voltage in the LOW (HIGH) state.

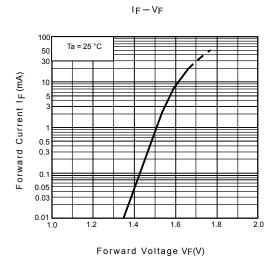


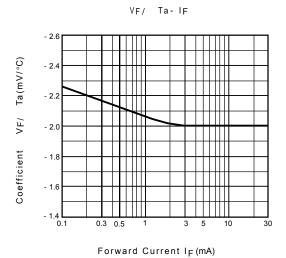

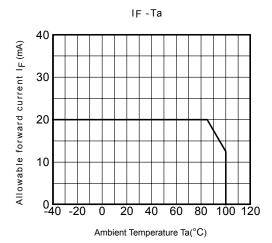

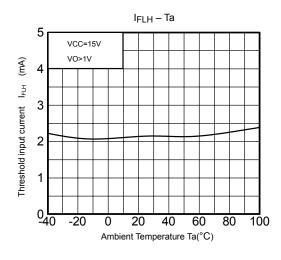


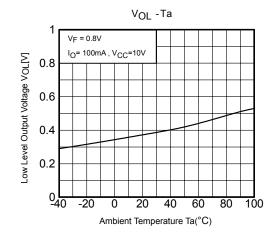


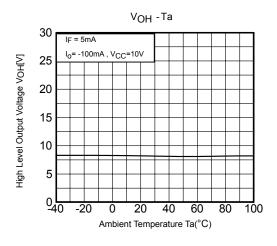



6 2006-01-17


 $<sup>\</sup>ast :$  The above graphs show typical characteristics.

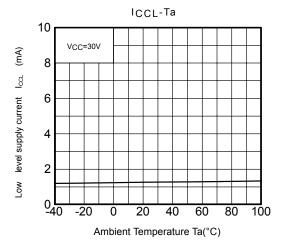

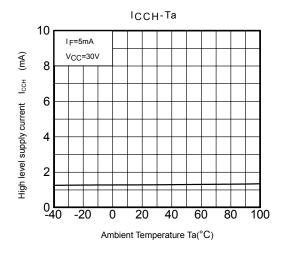

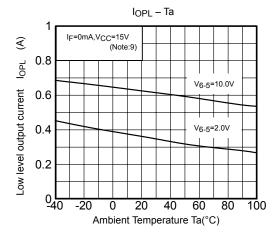

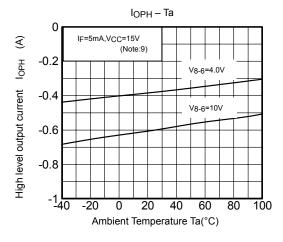

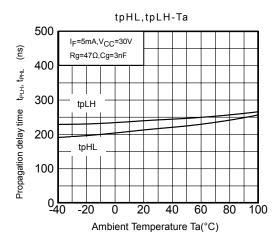

 $\ast :$  The above graphs show typical characteristics.

7 2006-01-17

#### **RESTRICTIONS ON PRODUCT USE**

030619EBC

- The information contained herein is subject to change without notice.
- The information contained herein is presented only as a guide for the applications of our products. No
  responsibility is assumed by TOSHIBA for any infringements of patents or other rights of the third parties which
  may result from its use. No license is granted by implication or otherwise under any patent or patent rights of
  TOSHIBA or others.
- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.
  In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- TOSHIBA products should not be embedded to the downstream products which are prohibited to be produced and sold, under any law and regulations.
- GaAs(Gallium Arsenide) is used in this product. The dust or vapor is harmful to the human body. Do not break, cut, crush or dissolve chemically.