


Model 4274 Multi-Stacking Banana Plug Patch Cord with In-Line Fuse Holder

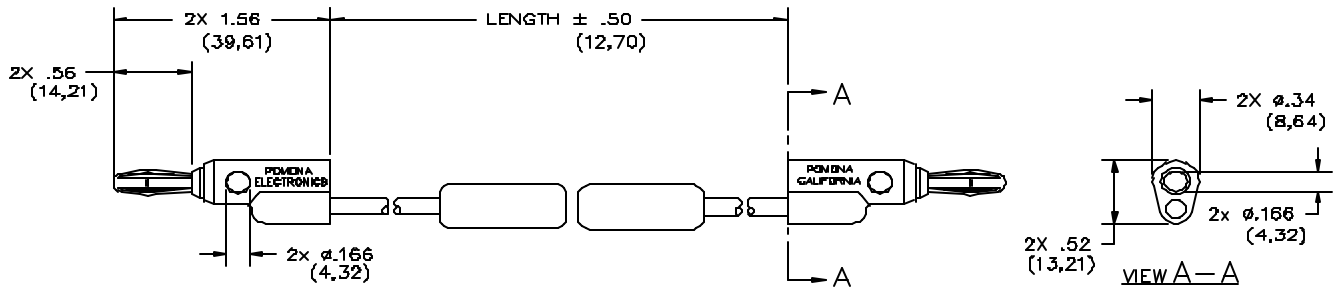

FEATURES:

- Provides protection from over current.
- Accepts standard .25 inch (6.4mm) diameter SFE and AGC fuses (fuse not included).
- Mates to Model #1581, 2854 or any standard banana jack.
- Vertical and cross stackable.

MATERIALS:

Conn: Stacking Banana Plug.

Material: Brass body, Beryllium Copper spring, nickel plated.

Insulation: Polypropylene.

Wire: 18 AWG, 65 x 36 t.c., PVC insulated, 3.7 (.144) O.D. Fuse holder, brass, tin plated.

Insulation: PVC. Accepts 6.4 (.25) dia. SFE and AGC fuses (not included).

RATINGS:

Operating Temperature: +55°C. (+131°F.) Max.

Voltage: Hand-held testing: 30VAC/60VDC Max.

Hands free testing in controlled voltage environments: 5000 WVDC Max.

Current: 15 Amperes

ORDERING INFORMATION: Model 4274-XX-*

XX = Cable Lengths, Standard Lengths: 24" (610), and 36" (914).

Additional lengths can be quoted upon request.

*= Color, -0 Black, -2 Red

Ordering Example: 4274-36-2 Indicates 36" in length, color is Red.

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA

Pomona[®]

Model 4274
Multi-Stacking Banana Plug
Patch Cord with In-Line Fuse Holder

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ± .005" (.127 mm).
All specifications are to the latest revisions. Specifications are subject to change without notice.
Registered trademarks are the property of their respective companies. Made in USA

6/9/99
SY/EH/LS
S:\Engineering\Release\DataSheets\FIukeDataSheet\4274_1_01.doc

Sales: 800-490-2361 Fax: 888-403-3360
Technical Assistance: 800-241-2060

PomonaACCESS 90593 (800) 444-6785 or (425) 446-6010
More drawings available at www.pomonaelectronics.com