

Features

362

- CONVERTS, DTL, TTL OR RTL TO HiNl LOGIC LEVELS
- INVERTING AND NONINVERTING INPUTS
- SPECIFIED TO TTL AND RTL CHARACTERISTICS
- IDEAL COMPANION TO 361 INPUT INTERFACE

363

- FANOUT UP TO 15
- VERSATILE TTL TO HiNl INTERFACE
- EXPANDABLE
- COLLECTOR OR'able OUTPUTS
- EXCELLENT LINE DRIVER

General Descriptions

362


The 362 converts TTL or RTL logic levels to HiNl logic levels. The converted data is available at the active pullup output in inverted or noninverted form, depending on the choice of input.

363


The 363 converts TTL logic levels to HiNl levels and drives lines at the HiNl levels. For applications flexibility, the 363 is configured as a quad NAND gate with passive pullup outputs and two expander inputs.

Logic Diagrams

362

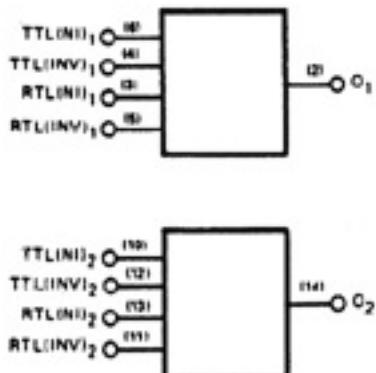


363

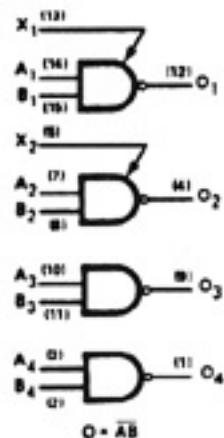


GRD = B
Vcc = 16

Equivalent Circuits

362

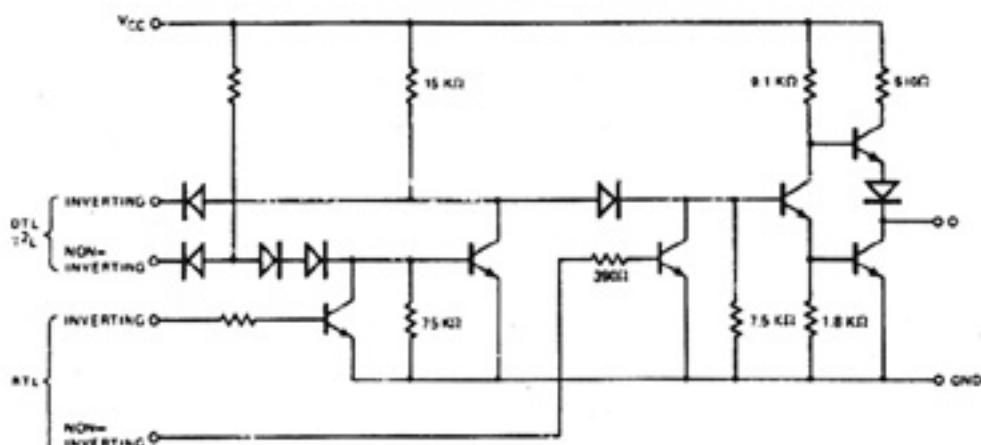

363

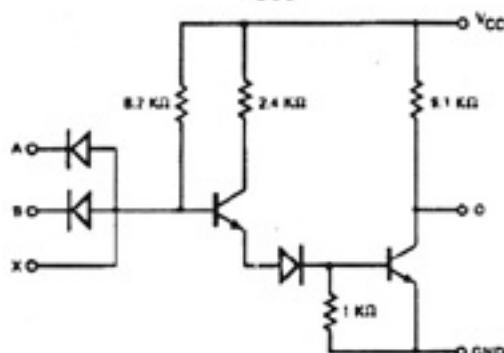

Specifications

| | | | | | | | | |
|---|---|-------------------|------------------|------------------|-------------------|-------------------|------------------|------------------|
| V _{OHL} | 5V min @ V _{CC} = 12V (Type C), 9V min @ V _{CC} = 15V (Type A) | | | | | | | |
| V _{OH} | 9V min @ V _{CC} = 11V (Type C), 12V min @ V _{CC} = 14V (Type A) | | | | | | | |
| I _{CC} (WORST-CASE) | 10 mA @ 13V, 13 mA @ 16V | | | | | | | |
| t _{PD} I/O FUNCTION FOR t _{PD} | 160 ns RTL/I+- | 400 ns RTLI--+ | 335 ns RTLN/- | 225 ns RTLN/+ | 100 ns TTL/I+- | 235 ns TTL/I-+ | 125 ns TTLN/- | 225 ns TTLN/+ |

Note: I_{CC} is tested at V_{CC} +1 Volt (+13V for C type and +16V for A type) and is guaranteed across the applicable temp range. t_{PD} is guaranteed at V_{CC} ± 1V and across the applicable temp range with the output loaded with 5 unit loads.

See page 12 for electrical summary data.

362 SPECIFICATIONS FOR RTL INPUTS

| | C and A Types | | |
|----------------------|---------------|------|---------|
| Temp (°C) | -30 | +25 | +70/+85 |
| I _{IN} (μA) | 460 | 440 | 470 |
| V _{INH} (V) | 0.95 | 0.85 | 0.75 |
| V _{INL} (V) | 0.6 | 0.5 | 0.38 |

362 SPECIFICATIONS FOR TTL INPUTS

V_{INH} = 2.0V; I_{INH} = 10μA
 V_{INL} = 0.8V; I_{INL} = 1.6 mA at V_{IN} = 0.4V
 (these specs apply over full temperature range)


363

| | | |
|---|--------------------------|----------------|
| I _{CC} (WORST-CASE) | 51 mA @ 13V, 64 mA @ 16V | |
| t _{PD} I/O FUNCTION FOR t _{PD} | 240 ns A+0- | 600 ns A-0+ |

363 SPECIFICATIONS FOR TTL INPUTS

V_{INH} = 2.0V; I_{INH} = 10μA
 V_{INL} = 0.8V; I_{INL} = 2.4 mA @ V_{CC} = 13V, V_{IN} = 0.4V
 V_{INL} = 0.8V; I_{INL} = 3.0 mA @ V_{CC} = 16V, V_{IN} = 0.4V

Switching Time Waveforms

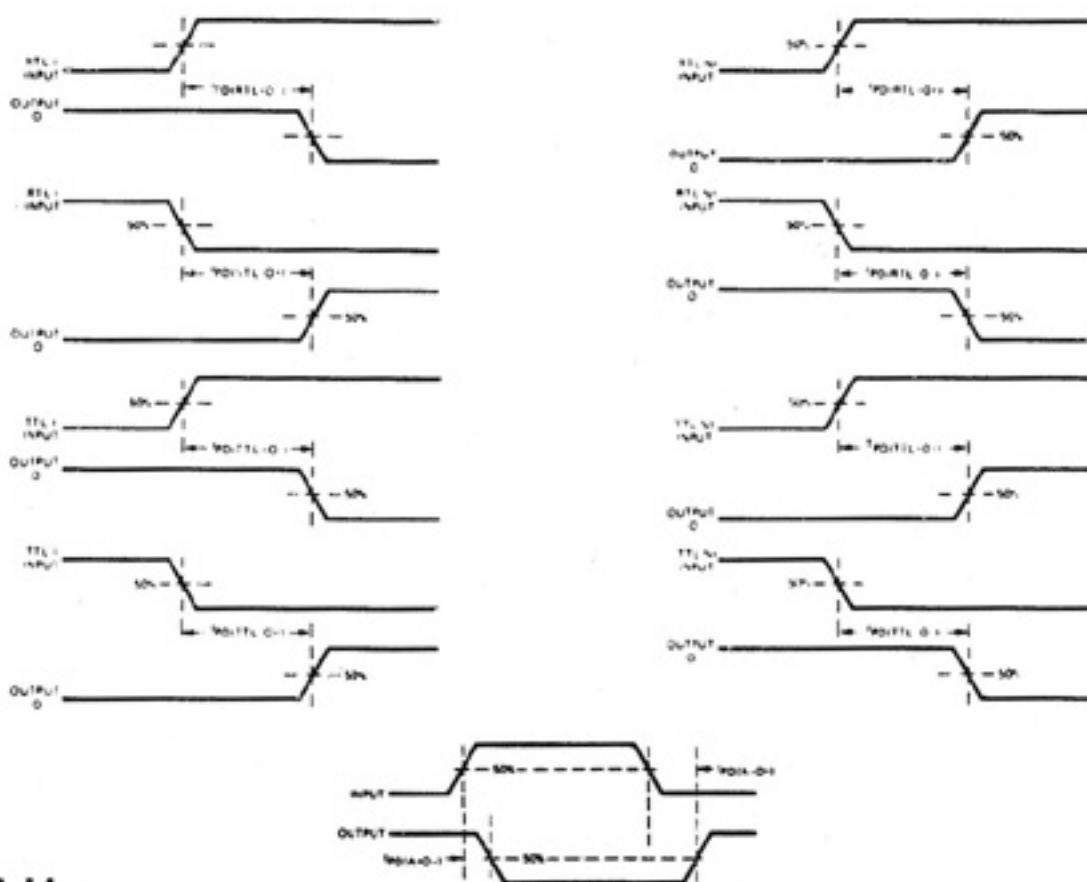

Loading Tables

362




| | | |
|---------------|-------------------|----------------------------|
| TTL, RTL O | Inputs Outputs | See specifications 5 UL |
|---------------|-------------------|----------------------------|


363

| PINS | FUNCTIONS | LOADING |
|----------------|------------------------------------|---|
| A, B X O | TTL inputs Expanders Outputs | 1 TTL load TTL expander input loading applies 5 UL 15 UL with 8.2K supplemental pullup resistor |

Typical Performance Characteristics

OUTPUT CURRENT VS OUTPUT VOLTAGE

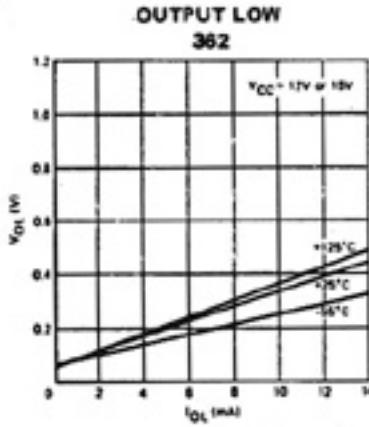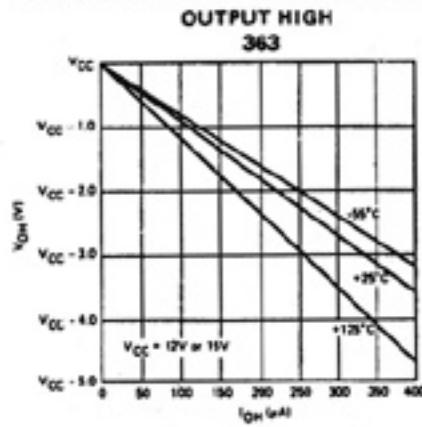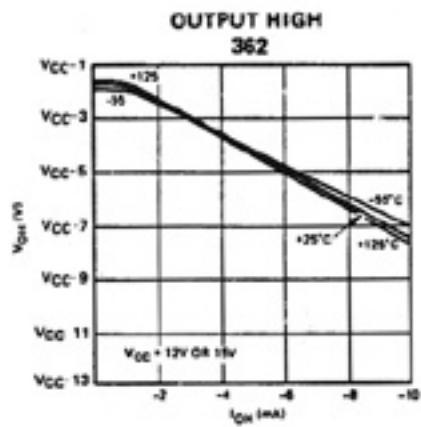


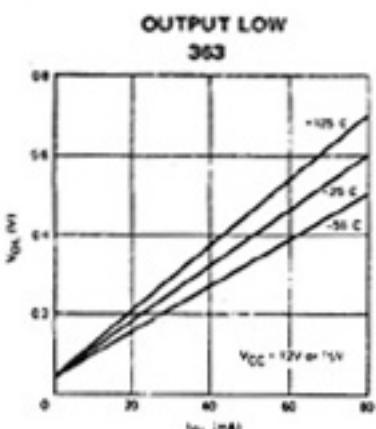Typical Performance Characteristics (contd.)

www.DataSheet4U.com

Typical Applications**LOW-NOISE DATA TRANSMISSION**

When signal lines between two low-level logic systems pass through a noisy environment, use 362 and 361 transmit/receive pairs to prevent noise pickup by the receiving system.

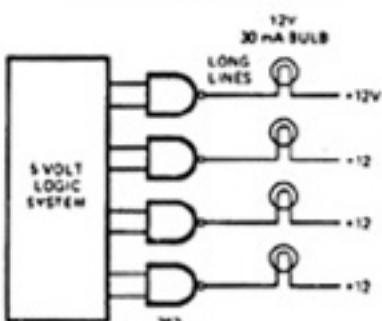INDICATOR DRIVER

Because of its higher output sink current and voltage, the 363 is an excellent output interface for 5V logic systems. Here, it allows a 5V logic system to control indicator lamps.