



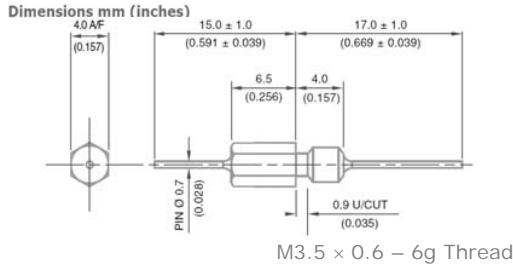

Feedthrough EMI Filter Datasheet

(M3.5 Thread : 4.0mm Hexagonal Head)

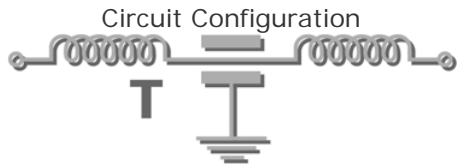

Electrical Details	
Electrical Configuration	T Filter
Capacitance Measurement	@ 1000hr Point
Current Rating	10A
Insulation Resistance (IR)	10GΩ or 1000ΩF
Temperature Rating	-55°C to +125°C
Ferrite Inductance (Typical)	100nH
Mechanical Details	
Head A/F	4mm (0.157")
Nut A/F	4.75mm (0.187")
Washer Diameter	6.9mm (0.272")
Mounting Torque (Maximum)	0.35Nm (3.09lbf in) if using nut 0.18Nm (1.59lbf in) into tapped hole
Mounting Hole Diameter	3.7mm ± 0.1 (0.146" ± 0.004")
Max. Panel Thickness	3.25mm (0.128")
Weight (Typical)	0.6g (0.02oz)
Finish	Silver plate on copper undercoat

Product Code	Hardware	Capacitance ±20% UOS	Dielectric	Rated Voltage (dc)	DWV (dc)	Typical Insertion Loss (db)					
						0.01MHz	0.1MHz	1MHz	10MHz	100MHz	1GHz
*SFAKT5000100ZC	0 = No hardware supplied 1 = supplied with standard nut and wavy washer Other options available – please contact factory	10pF -20% / +80%	COG	500	750						9
SFAKT5000150ZC		15pF -20% / +80%	COG	500	750						11
SFAKT5000220ZC		22pF -20% / +80%	COG	500	750					1	14
SFAKT5000330ZC		33pF -20% / +80%	COG	500	750					2	18
*SFAKT5000470ZC		47pF -20% / +80%	COG	500	750					4	20
*SFAKT5000680MC		68pF	COG	500	750					6	23
*SFAKT5000101MC		100pF	COG	500	750					9	27
SFAKT5000151MC		150pF	COG	500	750					12	30
*SFAKT5000221MC		220pF	COG	500	750					15	33
*SFAKT5000331MC		330pF	COG	500	750					19	36
*SFAKT5000471MC		470pF	†X7R	500	750				2	21	40
SFAKT5000681MC		680pF	†X7R	500	750				4	24	43
*SFAKT5000102MX		1.0nF	X7R	500	750				7	28	47
SFAKT5000152MX		1.5nF	X7R	500	750				10	30	50
*SFAKT5000222MX		2.2nF	X7R	500	750				13	34	53
SFAKT5000332MX		3.3nF	X7R	500	750				17	38	57
*SFAKT5000472MX		4.7nF	X7R	500	750				19	40	59
SFAKT5000682MX		6.8nF	X7R	500	750			1	23	43	63
*SFAKT5000103MX		10nF	X7R	500	750			4	26	45	66
*SFAKT5000153MX		15nF	X7R	500	750			7	29	47	68
*SFAKT5000223MX		22nF	X7R	500	750			10	33	49	70
SFAKT5000333MX		33nF	X7R	500	750			14	36	50	>70
*SFAKT2000473MX		47nF	X7R	200	500		1	17	39	52	>70
SFAKT2000683MX		68nF	X7R	200	500		2	20	42	57	>70
SFAKT1000104MX		100nF	X7R	100	250		4	22	46	62	>70
SFAKT0500154MX		150nF	X7R	50	125		7	25	49	68	>70

* Recommended values

† Also available in COG

Ordering Information

Note: Ordering code can have up to 4 additional digits on the end to denote special requirements

Type	Case Style	Thread	Electrical configuration	Voltage (dc)	Capacitance in picofarads (pF)	Capacitance Tolerance	Dielectric	Nuts & washers
SF	A	K	T	500	0102	M	X	0
Syfer Filter	4.0mm Hex Head	M3.5	T = T Filter	050 = 50V 100 = 100V 200 = 200V 500 = 500V	First digit is 0. Second and third digits are significant figures of capacitance code. The fourth digit is the number of zeros following. Examples: 0101 = 100pF 0332 = 3300pF	M = ±20% Z = -20+80%	C = COG/NPO X = X7R	0 = Without 1 = With



Syfer Technology Ltd.
Old Stoke Road, Arminghall
Norwich, Norfolk, NR14 8SU
United Kingdom

Tel: +44 1603 723300 | Email sales@syfer.co.uk | www.syfer.com

SFAKT Issue 1 (P104320)