


NOTES: UNLESS OTHERWISE SPECIFIED

- P/N: XMCOLOR
HOUSING & PLUNGER: MOLDED NYLON TYPE 6,6.
AVAILABLE IN TEN COLORS.
CONTACT BLADE: BERYLLIUM COPPER PER QQ-C-533. GOLD PLATED PER MIL-G-45204 B TYPE 1 0.0001 [0.00254] THICK MINIMUM.
SPRING: STAINLESS STEEL TYPE 302.

- P/N: 9202COLOR
HOUSING: MOLDED NYLON. AVAILABLE IN TEN COLORS.
FRAME: BRASS, NICKEL PLATED.
CONTACT: BeCu OR PHOSPHOR BRONZE. NICKEL PLATED.

- P/N: W-200/COLOR
22AWG 65X40 TINNED COPPER
0.070 [1.78] O.D. PVC INSULATION
AVAILABLE IN TEN COLORS.

- PERFORMANCE
MAXIMUM CURRENT: 2.5 AMPS
MAXIMUM VOLTAGE: 1000 (300 UL) W.V.D.C.
MAXIMUM TEMPERATURE: 221°F (105°C)

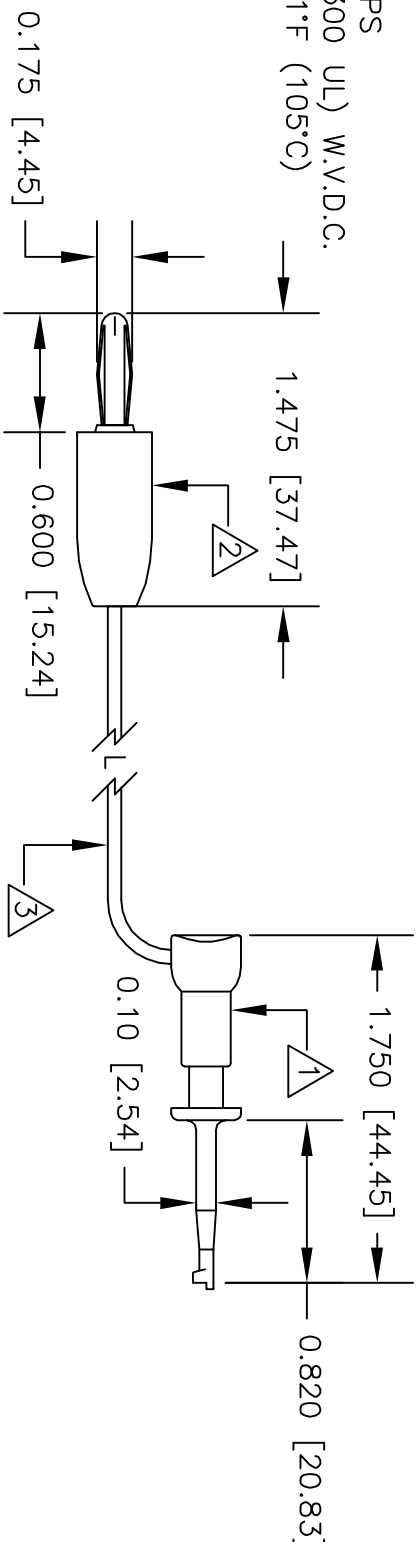

LTR	REVISIONS	DESCRIPTION	DATE	APPROVED

	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES	±	.XX ±	±	±
	MATERIAL	SEE NOTE.			
	FINISH	SEE NOTE.			
	USED ON				
	APPLICATION	DO NOT SCALE DRAWING			

CONTRACT NO.		
APPROVALS	DATE	
DRAWN	R.L.	9/10
APPROVED BY		

E-Z-HOOK		DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.	
DESCRIPTION			
MICRO-HOOK (XM) TO			
STK STD BAN PLUG (9203)			
SIZE	CODE	IDENT NO.	DRAWING NO.
A	08505	BXM	
SCALE	1:1		SHEET 1 OF 1

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK. DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.