


NOTES: UNLESS OTHERWISE SPECIFIED

- P/N: X100WCOLOR
HOUSING & PLUNGER: MOLDED NYLON TYPE 6,6.
AVAILABLE IN TEN COLORS.
CONTACT BLADE: BERYLLIUM COPPER PER QQ-C-533. GOLD PLATED PER MIL-G-45204 B TYPE 1 0.00001 [0.000254] THICK MINIMUM.
SPRING: STAINLESS STEEL TYPE 302.

- P/N: 92202COLOR
HOUSING: MOLDED NYLON. AVAILABLE IN TEN COLORS.
FRAME: BRASS. NICKEL PLATED.
CONTACT: BeCu OR PHOSPHOR BRONZE. NICKEL PLATED.

- P/N: W-200/COLOR
22AWG 65X40 TINNED COPPER
0.070 [1.78] O.D. PVC INSULATION
AVAILABLE IN TEN COLORS.

- PERFORMANCE
MAXIMUM CURRENT: 2.5 AMPS
MAXIMUM VOLTAGE: 1000 (300 UL) W.V.D.C.
MAXIMUM TEMPERATURE: 221°F (105°C)

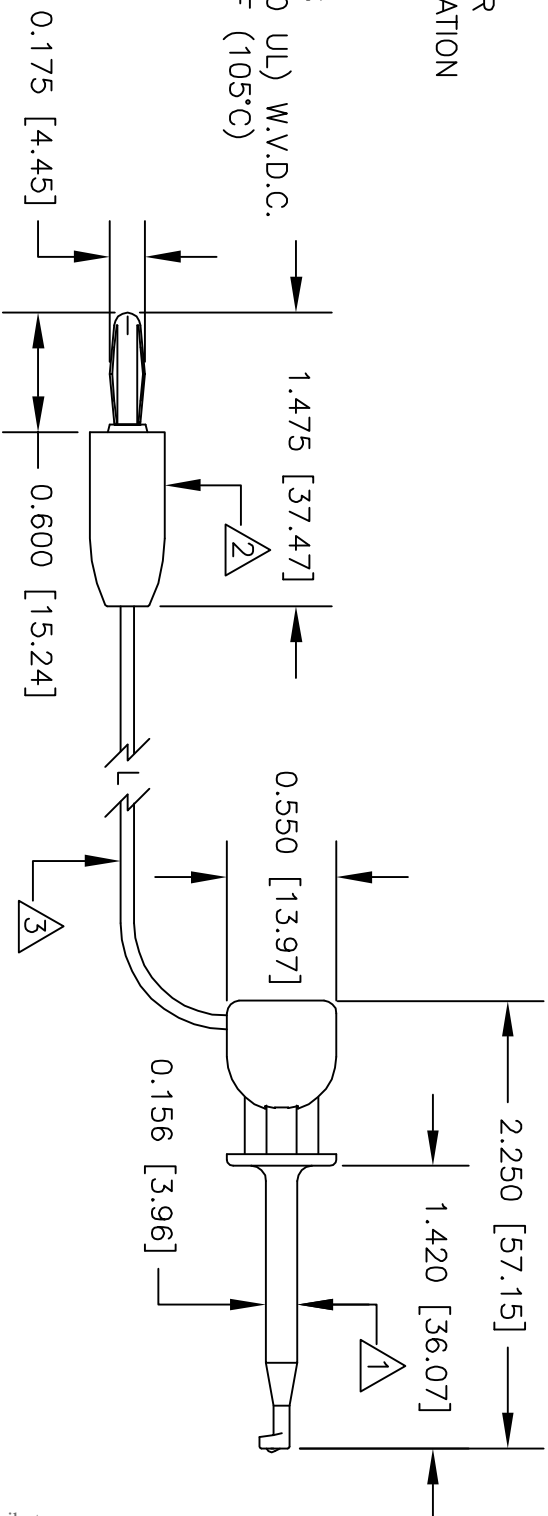

LTR	REVISIONS	DESCRIPTION	DATE	APPROVED

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES

± .XX ±	±	±
± .XXX ±	±	±
MATERIAL SEE NOTE.		
FINISH SEE NOTE.		
USED ON		
APPLICATION DO NOT SCALE DRAWING		

CONTRACT NO.		DESCRIPTION	
APPROVALS	DATE	MINI-HOOK (X100W) TO STD BANANA PLUG (9202)	
R.L.	9/10	SIZE	CODE IDENT NO. DRAWING NO.
APPROVED BY		A	08505 BX1W
		SCALE	1:1
		SHEET	1 OF 1

E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.