


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: XMCOLOR
HOUSING & PLUNGER: MOLDED NYLON TYPE 6,6.
AVAILABLE IN TEN COLORS.
CONTACT BLADE: BERYLLIUM COPPER PER QQ-C-533.
GOLD PLATED PER MIL-G-45204 B TYPE 1 0.0001 [0.00254] THICK MINIMUM.
SPRING: STAINLESS STEEL TYPE 302.

2. P/N: W-200/COLOR
22AWG 65X40 TINNED COPPER
0.070 [1.78] O.D. PVC INSULATION
AVAILABLE IN TEN COLORS.

3. PERFORMANCE
MAXIMUM CURRENT: 2.5 AMPS
MAXIMUM VOLTAGE: 1000 (300 UL) W.V.D.C.
MAXIMUM TEMPERATURE: 221°F (105°C)

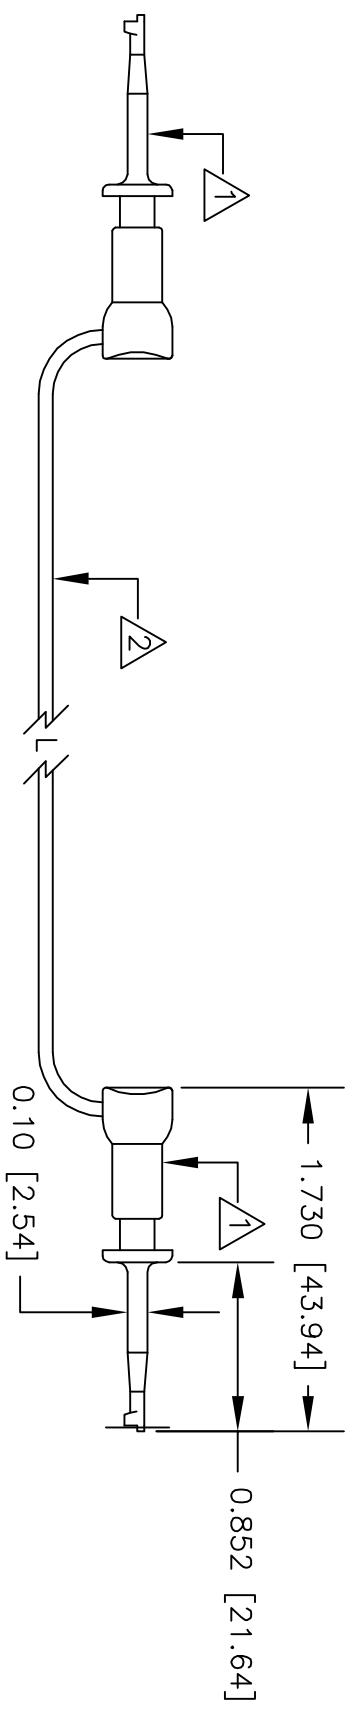

LTR	REVISIONS	DESCRIPTION	DATE	APPROVED

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± .XXX ±		CONTRACT NO.		DESCRIPTION	
MATERIAL SEE NOTE.		APPROVALS		MICRO-HOOK (XM)	
FINISH SEE NOTE.		DATE		JUMPER	
USED ON		DRAWN		SIZE CODE IDENT NO. DRAWING NO.	
APPLICATION		APPROVED BY		A 08505 204XM	
DO NOT SCALE DRAWING		R.L. 10/10		SCALE 1:1	
				SHEET 1 OF 1	

E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.