


NOTES: UNLESS OTHERWISE SPECIFIED

- P/N: PICO  
HOUSING & PLUNGER: MOLDED NYLON TYPE 6,6.  
AVAILABLE IN TEN COLORS.  
CONTACT BLADE: BERYLLIUM COPPER, GOLD PLATED  
PER MIL-G-45204 B TYPE 1  
0.00001" [0.000254] THK MINIMUM.  
SPRING: STAINLESS STEEL TYPE 302.

- P/N W-701/COLOR  
28AWG 19X40 TINNED COPPER  
0.047 [1.19] O.D. PVC INSULATION  
AVAILABLE IN TEN COLORS.

- PERFORMANCE  
MAXIMUM CURRENT: 1.0 AMPS  
MAXIMUM VOLTAGE: 600 W.V.D.C.  
MAXIMUM TEMPERATURE: 221°F (105°C)

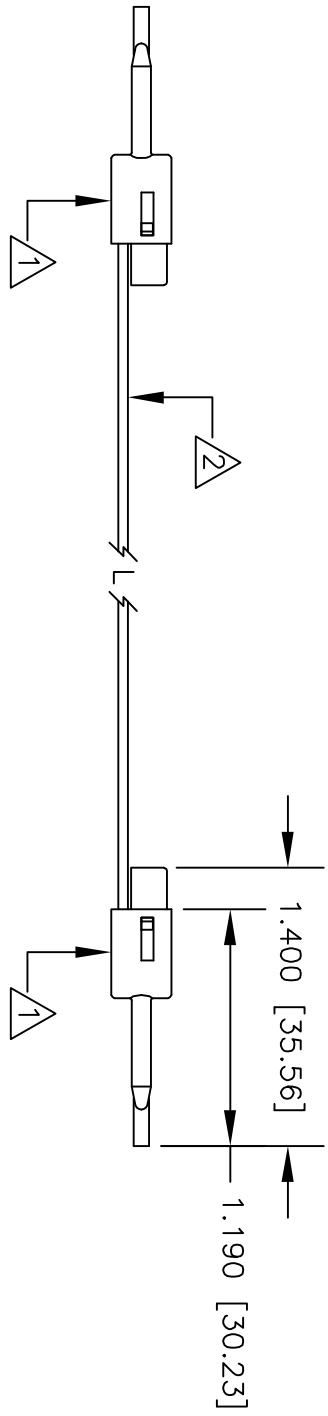

LTR	REVISIONS	DESCRIPTION	DATE	APPROVED

	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES	CONTRACT NO.
	± .XX ± .XXX ±	APPROVALS
		DATE
	MATERIAL SEE NOTE.	DRAWN R.L.
		APPROVED BY
	FINISH SEE NOTE.	
	USED ON	
	APPLICATION	DO NOT SCALE DRAWING

<b>E-Z-HOOK</b>		DIVISION OF TEKTEST INC.	
		ARCADIA, CA 91006 U.S.A.	
DESCRIPTION			
PICO HOOK JUMPER			
SIZE	CODE IDENT NO.	DRAWING NO.	REV
A	08505	P704	
SCALE	1:1	SHEET 1	OF 1

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK. DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.