


SINGLE-SIDEBAND DOUBLE-BALANCED MIXERS

SSB-0218

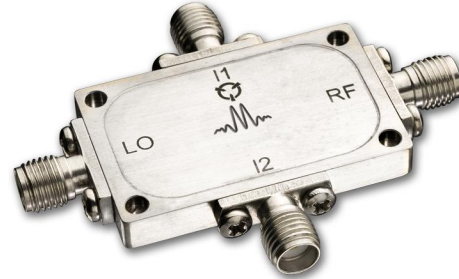

Features

- ¾ LO/RF 2.0 to 18.0 GHz
- ¾ IF 50 to 90 MHz
- ¾ 7 dB Typical Conversion Loss
- ¾ 22 dB Typical Sideband Suppression
- ¾ 22 dB Typical Carrier Suppression
- ¾ Ultra-Broadband RF and LO
- ¾ IF Bands available from 30 to 500 MHz

Electrical Specifications

Parameter	LO (GHz)	RF (GHz)	IF (MHz)	Min	Typ	Max	Diode Option LO drive level (dBm)
Conversion Loss (dB)	2.0-18.0	2.0-18.0	50-90		7.0	9.0	
Sideband Suppression	2.0-18.0	2.0-18.0	50-90	15	22		
Carrier Suppression (0 dBm IF input)	2.0-18.0	2.0-18.0		13	22		
Input 1 dB Compression (dBm)	2.0-18.0	2.0-18.0			+5 +8		L (+13 to +16) M (+16 to +19)
Input Two-Tone Third Order Intercept Point (dBm)	2.0-18.0	2.0-18.0			+15 +18		L (+13 to +16) M (+16 to +19)

Part Number Options

<i>Please specify diode level and package style by adding to model number.</i>	
Package Style(s) ¹	Example
IR0218	SSB-0218 <u>L</u>

¹Higher LO drive levels are available. Many other IF bands are available.

Marki Microwave reserves the right to make changes to the product(s) or information contained herein without notice. Marki Microwave makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Marki Microwave assume any liability whatsoever arising out of the use of or application of any product.

215 Vineyard Court, Morgan Hill, CA 95037 | Ph: 408.778.4200 | Fax 408.778.4300 | info@markimicrowave.com






SINGLE-SIDEBAND
DOUBLE-BALANCED MIXERS
Page 2

SSB-0218

LO/RF 2.0 to 18.0 GHz
IF 50 to 90 MHz

Specifications guaranteed
from -55 to +100°C,
measured in a 50-Ohm System

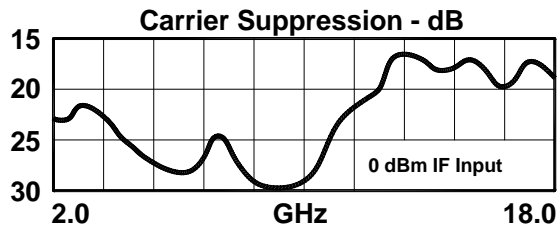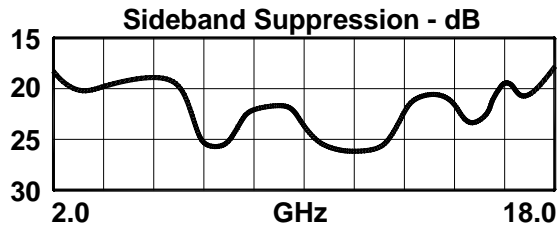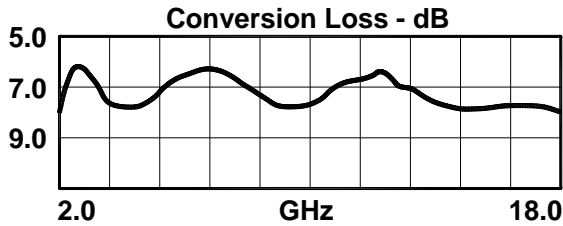

For additional information, please visit the following sections on the Marki Microwave website.

- [Data Sheet Notes](#) ▶
- [Application Notes](#) ▶
- [Package Outlines](#) ▶
- [Terms & Conditions of Sale](#) ▶
- [Sales/Contact Information](#) ▶
- [View Entire Product Line](#) ▶

Marki Microwave reserves the right to make changes to the product(s) or information contained herein without notice. Marki Microwave makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does Marki Microwave assume any liability whatsoever arising out of the use or application of any product.

© Marki Microwave, Inc.



215 Vineyard Court, Morgan Hill, CA 95037 | Ph: 408.778.4200 | Fax 408.778.4300 | info@markimicrowave.com

www.markimicrowave.com