

NOTES: UNLESS OTHERWISE SPECIFIED

- P/N: X100WBK  
HOUSING & PLUNGER: MOLDED NYLON TYPE 6.6.  
CONTACT BLADE: BERYLLIUM COPPER PER QQ-C-533. GOLD PLATED PER MIL-C-45204 B TYPE 1 0.00001" [0.000254] THICK MINIMUM.  
SPRING: STAINLESS STEEL TYPE 302.

- P/N: X100WRD  
HOUSING & PLUNGER: MOLDED NYLON TYPE 6.6.  
CONTACT BLADE: BERYLLIUM COPPER PER QQ-C-533. GOLD PLATED PER MIL-C-45204 B TYPE 1 0.00001" [0.000254] THICK MINIMUM.  
SPRING: STAINLESS STEEL TYPE 302.

- P/N: 9230  
BODY & FITTINGS: BRASS. NICKEL PLATED.  
PIN: BRASS. GOLD PLATED.  
DIELECTRIC: PTFE.


- P/N: 0480  
HOUSING: MOLDED DELRIN. BLACK.

- P/N: W-500/0  
20AWG 105X40 TINNED COPPER  
0.080 [2.03] O.D. PVC INSULATION

- P/N: W-500/2  
20AWG 105X40 TINNED COPPER  
0.080 [2.03] O.D. PVC INSULATION

- PERFORMANCE:  
MAXIMUM CURRENT: 3.0 AMPS  
MAXIMUM VOLTAGE: 1000 W.V.D.C.  
MAXIMUM TEMPERATURE: 221°F [105°C]

REVISIONS		DATE	APPROVED
LTR			
	DESCRIPTION		

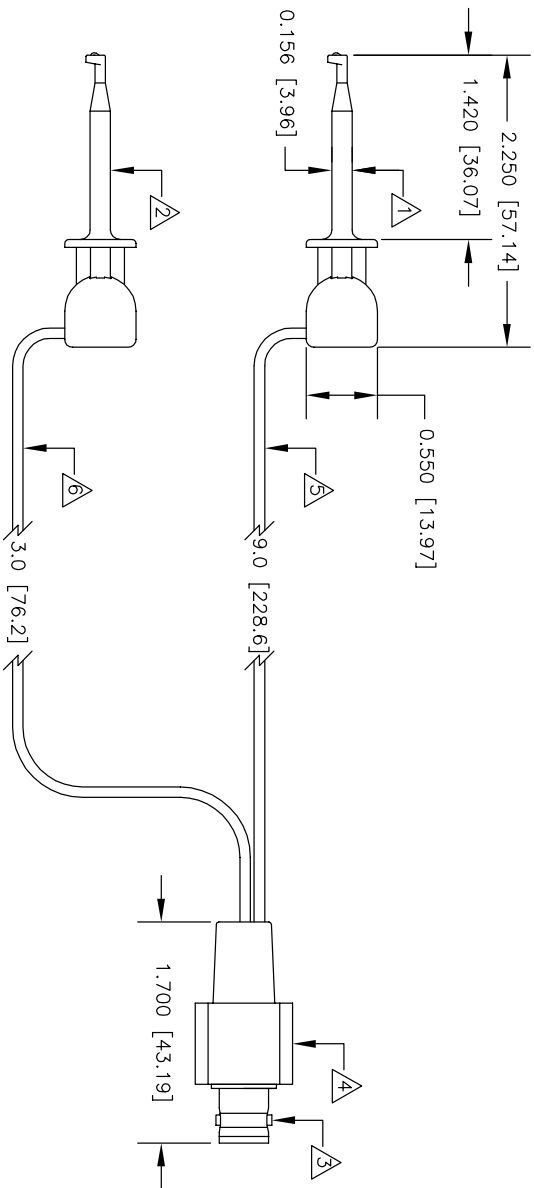

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. FRACTIONS, DECIMALS, ANGLES		CONTRACT NO.		DESCRIPTION	
* .XXX #	#	APPROVALS	DATE	BNC FEMALE (9230) ADAPTER TO MINI-HOOK'S (X100W)	
MATERIAL		DRAWN	9/10	DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.	
SEE NOTE.		APPROVED BY		SIZE CODE IDENT NO. DRAWING NO.	
FINISH				B 08505 1001	
SEE NOTE.				SCALE 1:1	
NEXT ASSY USED ON		DO NOT SCALE DRAWING		SHEET 1 OF 1	

THIS INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO EZ-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PERMISSION OF EZ-HOOK. DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.