


NOTES: UNLESS OTHERWISE SPECIFIED

- P/N: PICO
HOUSING & PLUNGER: MOLDED NYLON TYPE 6,6.
AVAILABLE IN TEN COLORS.
CONTACT BLADE: BERYLLIUM COPPER, GOLD PLATED
PER MIL-G-45204 B TYPE 1
0.00001" [0.000254] THK MINIMUM.
SPRING: STAINLESS STEEL TYPE 302.

- P/N: 9205-HS
HEAT SHRINK: MOLDED NYLON. AVAILABLE IN BLACK.
BODY: BRASS, 40UIN [1.02UM] MIN GOLD OVER NICKEL
PLATED.
CONTACT: BeCu OR PHOSPHOR BRONZE, 1.02UM(40UIN) MIN
GOLD OVER NICKEL PLATED.

- P/N W-701/COLOR
28AWG 19X40 TINNED COPPER
0.047 [1.19] O.D. PVC INSULATION
AVAILABLE IN TEN COLORS.

- PERFORMANCE
MAXIMUM CURRENT: 1.0 AMPS
MAXIMUM VOLTAGE: 600 W.V.D.C.
MAXIMUM TEMPERATURE: 221°F (105°C)

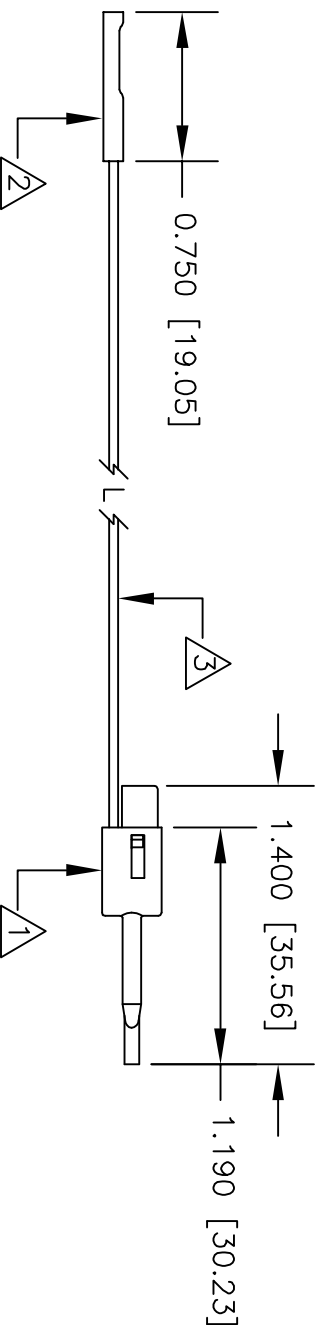

LTR	REVISIONS	DESCRIPTION	DATE	APPROVED

		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES		CONTRACT NO.	
		± .XX ± ± .XXX ±		APPROVALS	
		MATERIAL SEE NOTE.		DRAWN R.L.	
		FINISH SEE NOTE.		APPROVED BY	
		APPLICATION USED ON		DATE 9/10	
		DO NOT SCALE DRAWING		DESCRIPTION	
				<p>E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.</p>	
				<p>PICO HOOK TO 0.025 [0.64] SQUARE SOCKET</p>	
				<p>SIZE CODE IDENT NO. DRAWING NO.</p> <p>A 08505 P703</p>	
				<p>SCALE 1:1</p> <p>SHEET 1 OF 1</p>	

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK, DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.