

## **COLOUR DEMODULATOR COMBINATION**

The TDA2520 is an integrated synchronous demodulator combination for colour television receivers incorporating the following functions :


- 8,8 MHz oscillator followed by a divider giving two 4,4 MHz signals used as reference signals
- keyed burst phase detector for optimum noise behaviour
- a stage to obtain chrominance signal control (a.c.c.) and an a.c.c. reference level
- a colour killer and identification signal detector
- two synchronous demodulators for the (B-Y) and (R-Y) signals
- temperature compensated emitter follower outputs
- PAL switch
- PAL flip-flop
- integrated capacitors in the symmetrical demodulators reduce unwanted carrier-signals at the outputs.

<b>QUICK REFERENCE DATA</b>					
Supply voltage	V <sub>12-16</sub>	typ.	12	V	
Supply current	I <sub>12</sub>	typ.	40	mA	
Colour difference output signals peak-to-peak values	- (R-Y) - (G-Y) - (B-Y)	V <sub>3-16(p-p)</sub> V <sub>2-16(p-p)</sub> V <sub>1-16(p-p)</sub>	> > >	2,4 1,35 3	V
Impedance of colour difference signal outputs		typ.	250	Ω	

### **PACKAGE OUTLINES**

TDA2520 : 16-lead DIL ; plastic (SOT-38).  
TDA2520Q: 16-lead QIL ; plastic (SOT-58).

**BLOCK DIAGRAM**

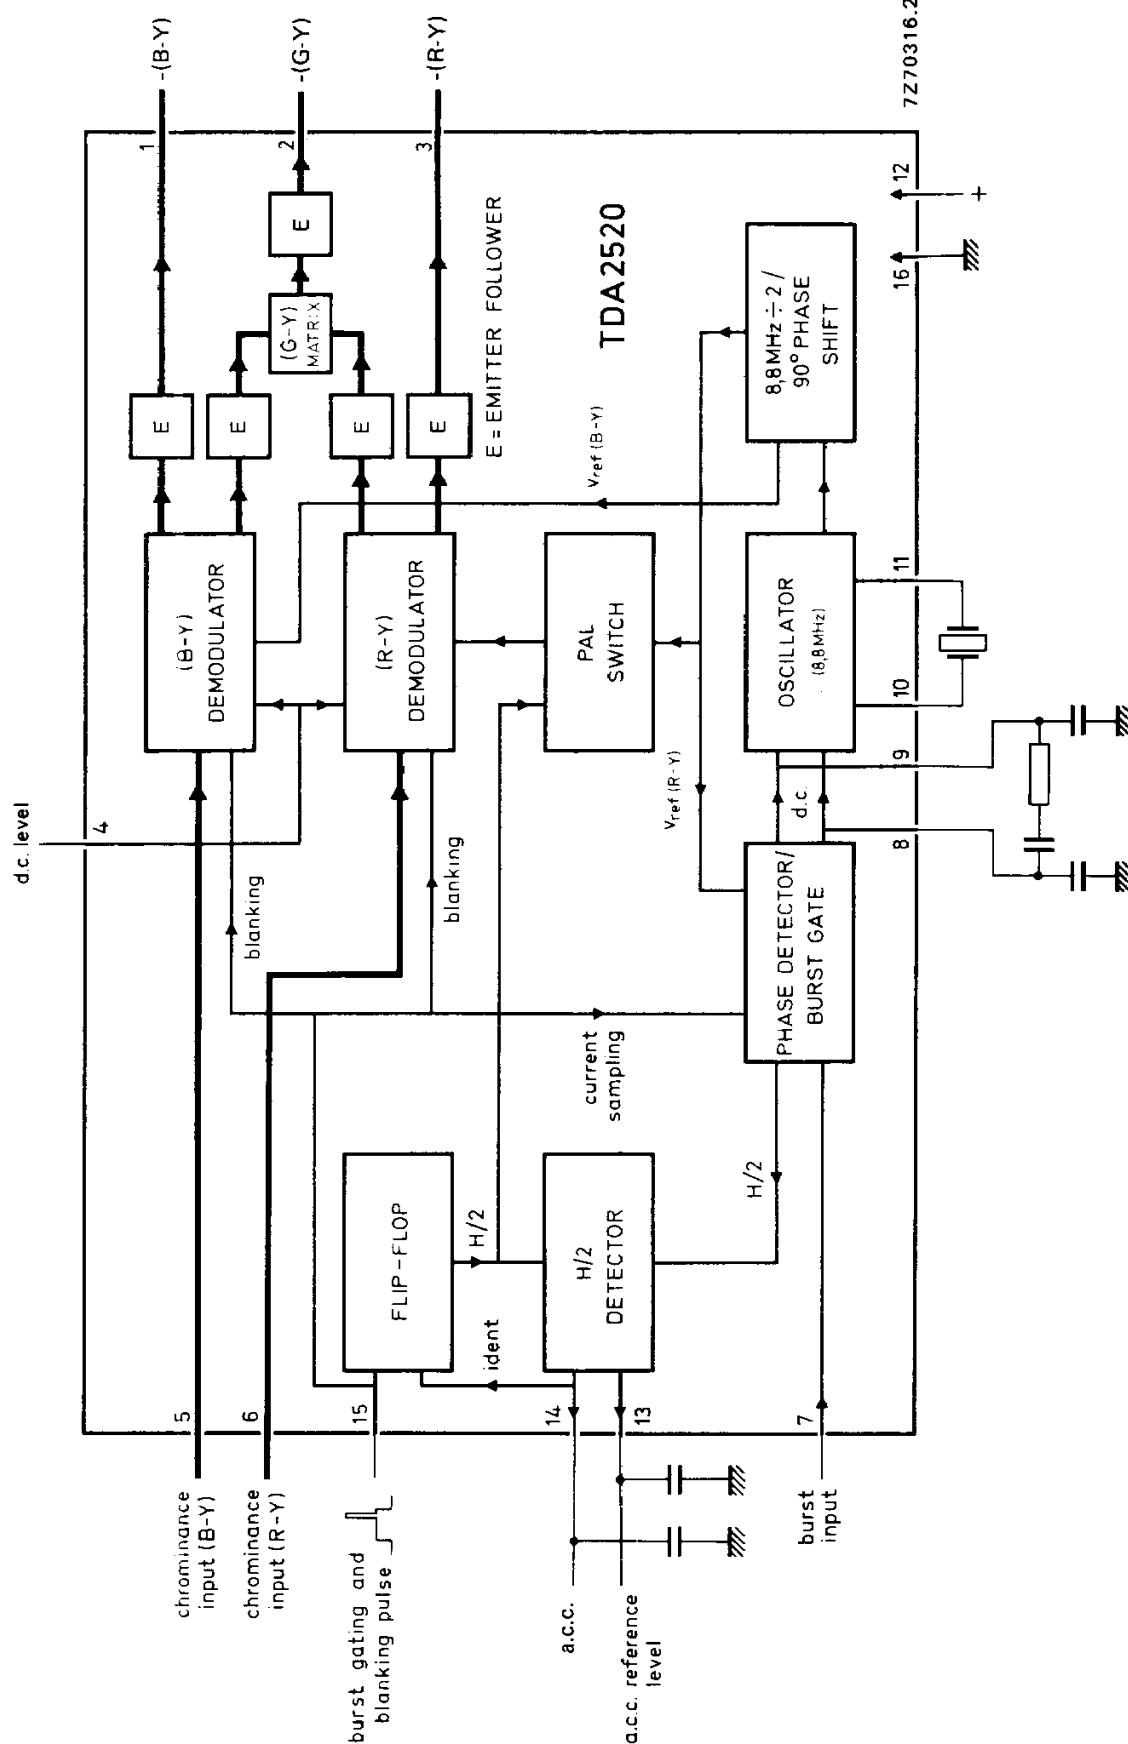

January 1977

**RATINGS** Limiting values in accordance with the Absolute Maximum System (IEC 134)

Voltage

Supply voltage	V <sub>12-16</sub>	max.	14	V
----------------	--------------------	------	----	---

Power dissipation

Total power dissipation	P <sub>tot</sub>	max.	600	mW
-------------------------	------------------	------	-----	----

Temperatures

Storage temperature	T <sub>stg</sub>	-20 to +125	°C
---------------------	------------------	-------------	----

Operating ambient temperature	T <sub>amb</sub>	-20 to +60	°C
-------------------------------	------------------	------------	----

**CHARACTERISTICS** at V<sub>12-16</sub> = 12 V; T<sub>amb</sub> = 25 °C

**Demodulator part**

Ratio of demodulated signals

B-Y/R-Y :	$\frac{V_{1-16}}{V_{3-16}}$	typ.	1,78	
G-Y/R-Y :	$\frac{V_{2-16}}{V_{3-16}}$	typ.	0,85	1)
G-Y/R-Y :	$\frac{V_{2-16}}{V_{3-16}}$	typ.	0,17	2)

Colour difference output signals 3)

peak-to-peak values	-(R-Y)	V <sub>3-16(p-p)</sub>	>	2,4	V
	-(G-Y)	V <sub>2-16(p-p)</sub>	>	1,35	V
	-(B-Y)	V <sub>1-16(p-p)</sub>	>	3	V

Impedance of colour difference

signal outputs	Z <sub>3-16</sub>	typ.	250	Ω
	Z <sub>2-16</sub>	typ.	250	Ω
	Z <sub>1-16</sub>	typ.	250	Ω

H/2 ripple at R-Y output (peak-to-peak value)	<	10	mV
---	---	----	----

Blanking and keying pulse

burst keying: active for	V <sub>15-16</sub>	>	7,5	V
inactive for	V <sub>15-16</sub>	<	6,5	V
blanking: active for	V <sub>15-16</sub>	>	2	V
inactive for	V <sub>15-16</sub>	<	1	V

1) The demodulators are driven by a chrominance signal of equal amplitude for the (R-Y) and the (B-Y) components. The phase of the (R-Y) chrominance signal equals the phase of the (R-Y) reference signal.

The same holds for the (B-Y) signals.

2) As under note 1, but the phase of the (R-Y) reference signal reversed.

3) The d.c. level of the colour difference outputs can be adjusted from 6 to 10 V at pin 4.

**CHARACTERISTICS (continued)**

**Reference part**

Colour burst (peak-to-peak value)	V <sub>7-16(p-p)</sub>	typ.	0,5 V
Phase difference between reference and burst signals for $\pm 400$ Hz deviation of crystal frequency	<	$\pm 5^\circ$	
Overall holding range with typical crystal	$\Delta f$	typ.	$\pm 500$ Hz
A.C.C. reference output voltage	V <sub>13-16</sub>	typ.	7 V
A.C.C. voltage at 0,5 V peak-to-peak burst at correct phase with zero burst	V <sub>14-16</sub> V <sub>14-16</sub>	typ. typ.	5,5 V 7,0 V
Oscillator input resistance	R <sub>11-16</sub>	typ.	270 $\Omega$
Oscillator input capacitance	C <sub>11-16</sub>	see note	
Oscillator output resistance	R <sub>10-16</sub>	typ.	200 $\Omega$

Note : to be established.