


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: XMCOLOR
HOUSING & PLUNGER: MOLDED NYLON TYPE 6,6.
AVAILABLE IN TEN COLORS.
CONTACT BLADE: BERYLLIUM COPPER PER QQ-C-533.
GOLD PLATED PER MIL-G-45204 B TYPE 1 0.0001 [0.00254] THICK MINIMUM.
SPRING: STAINLESS STEEL TYPE 302.

2. P/N W-701/COLOR
28AWG 19X40 TINNED COPPER
0.047 [1.19] O.D. PVC INSULATION
AVAILABLE IN TEN COLORS.

3. PERFORMANCE
MAXIMUM CURRENT: 1.0 AMPS
MAXIMUM VOLTAGE: 600 W.V.D.C.
MAXIMUM TEMPERATURE: 221°F (105°C)

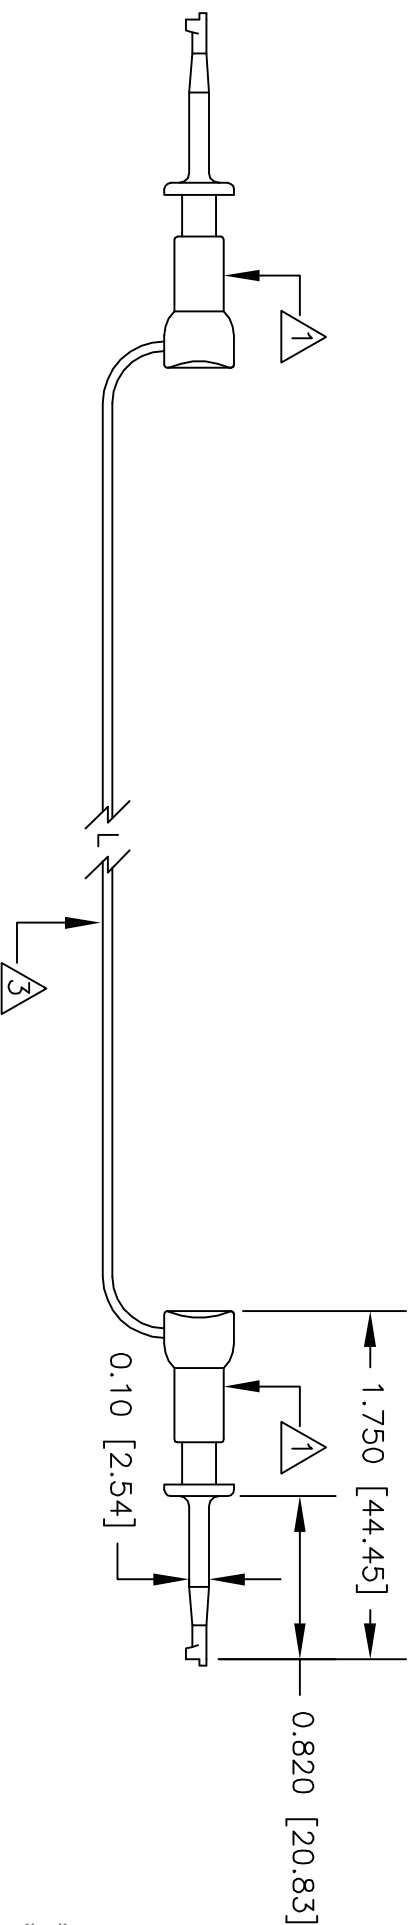

LTR	REVISIONS	DESCRIPTION	DATE	APPROVED

	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES	±	.XX ±	±	.XXX ±
	MATERIAL	SEE NOTE.			
	FINISH	SEE NOTE.			
	USED ON				
	APPLICATION	DO NOT SCALE DRAWING			

CONTRACT NO.		
APPROVALS	DATE	
DRAWN	R.L.	11/10
APPROVED BY		

E-Z-HOOK		DIVISION OF TEKTEST INC.	
		ARCADIA, CA 91006 U.S.A.	
DESCRIPTION			
MICRO-HOOK (XM)			
JUMPER			
SIZE	CODE IDENT NO.	DRAWING NO.	REV
A	08505	704XM	
SCALE	1:1	SHEET 1	OF 1

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF E-Z-HOOK. DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN A HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.