


NOTES: UNLESS OTHERWISE SPECIFIED

- P/N: X100W/COLOR
HOUSING & PLUNGER: MOLDED NYLON TYPE 6.6. AVAILABLE IN TEN COLORS.
CONTACT BLADE: BERYLLIUM COPPER PER QQ-C-533. GOLD PLATED PER MIL-G-45204 B TYPE 1 0.00001 [0.000254] THICK MINIMUM.
SPRING: STAINLESS STEEL TYPE 302.

- P/N: 9302/COLOR
HOUSING: MOLDED NYLON 6.6. AVAILABLE IN TEN COLORS.
FRAME: BRASS, NICKEL PLATED.
CONTACT: BeCu OR PHOSPHOR BRONZE, NICKEL PLATED.
HARDWARE: STAINLESS STEEL NUT, BRASS EYELET, COPPER, TIN PLATED TERMINAL RING.

- P/N: W-600/COLOR
18AWG 65X36 TINNED COPPER
0.144 [3.66] O.D. PVC INSULATION
AVAILABLE IN TEN COLORS.

- PERFORMANCE
MAXIMUM CURRENT: 4.0 AMPS
MAXIMUM VOLTAGE: 5000 W.V.D.C.
MAXIMUM TEMPERATURE: 221°F (105°C)

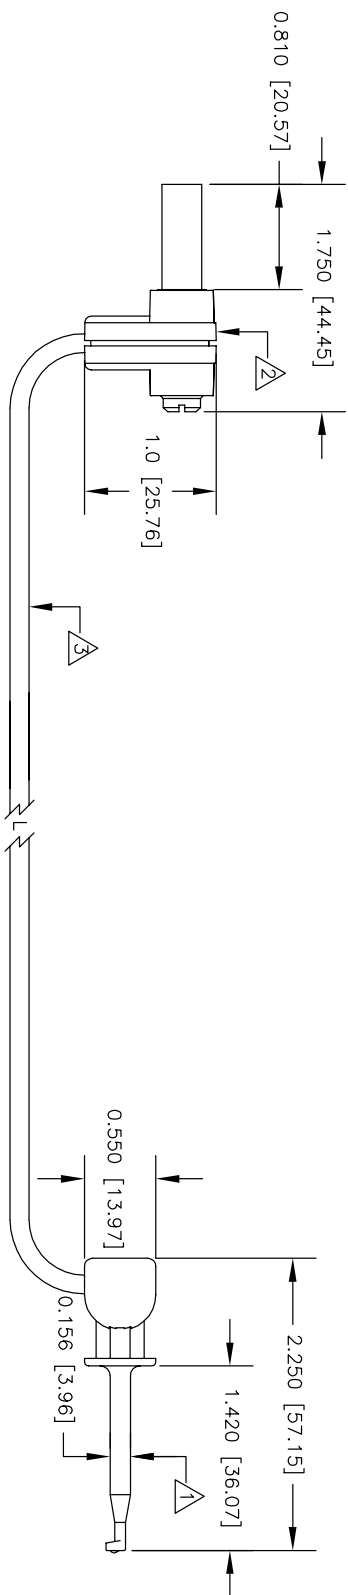

REVISIONS		DATE	APPROVED
LTR	DESCRIPTION		

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES FRACTIONS DECIMALS ANGLES .XXX ± °		CONTRACT NO.		DESCRIPTION	
APPROVALS	DATE	APPROVALS	DATE	E-ZHOOK® DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.	
R.L	10/10	R.L	10/10	MINI-HOOK (X100W) TO SHRD R/A BAN PLG (9302)	
MATERIAL SEE NOTE.		APPROVED BY		SIZE	DRAWING NO.
FINISH SEE NOTE.				B	08505 633W
NEXT ASSY USED ON		DO NOT SCALE DRAWING		SCALE	1:1
APPLICATION				SHEET	1 OF 1

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PERMISSION OF E-Z-HOOK, DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN HANDS FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.