


NOTES: UNLESS OTHERWISE SPECIFIED

- P/N: PICO
HOUSING & PLUNGER: MOLDED NYLON TYPE 6,6.
AVAILABLE IN TEN COLORS.
CONTACT BLADE: BERYLLIUM COPPER, GOLD PLATED
PER MIL-G-45204 B TYPE 1
0.00001" [0.000254] THK MINIMUM.
SPRING: STAINLESS STEEL TYPE 302.

- P/N W-701/COLOR
28AWG 19X40 TINNED COPPER
0.047 [1.19] O.D. PVC INSULATION
AVAILABLE IN TEN COLORS.

- PERFORMANCE
MAXIMUM CURRENT: 1.0 AMPS
MAXIMUM VOLTAGE: 600 W.V.D.C.
MAXIMUM TEMPERATURE: 221°F (105°C)

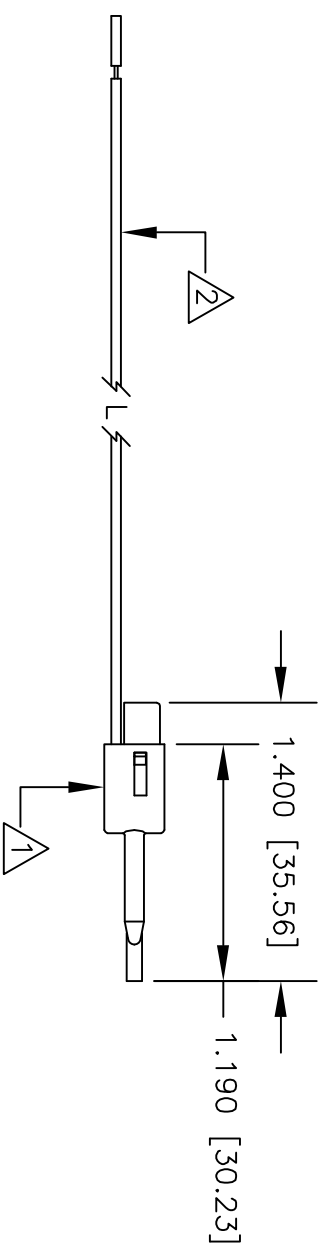

LTR		REVISIONS		DATE	APPROVED
DESCRIPTION	DATE	DESCRIPTION	DATE		

	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES	CONTRACT NO.	
	± .XX ± .XXX ±	APPROVALS	DATE
	MATERIAL SEE NOTE.	DRAWN	
	FINISH SEE NOTE.	APPROVED BY	
	USED ON		
	APPLICATION	DO NOT SCALE DRAWING	

E-Z-HOOK		DIVISION OF TEKTEST INC.	
ARCADIA, CA 91006 U.S.A.		DESCRIPTION	
PICO HOOK TO LEAD ONLY		SIZE	CODE IDENT NO.
SCALE		A	08505
DRAWING NO.		P713	REV
SHEET 1 OF 1			