

NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: XL1COLOR

HOUSING & PLUNGER: MOLDED NYLON TYPE 6.6.
AVAILABLE IN TEN COLORS.

CONTACT BLADE: BERYLLIUM COPPER PER QQ-C-533, GOLD
PLATED PER MIL-G-45204;4001 0.00001
[0.000254] THICK MINIMUM.

SPRING: STAINLESS STEEL TYPE 302.

2. P/N: 9260COLOR

HOUSING: MOLDED NYLON, AVAILABLE IN TEN COLORS.

FRAME: BRASS, NICKEL PLATED.

CONTACT: BECU OR PHOSPHOR BRONZE, NICKEL PLATED.

3. P/N: W-600/COLOR

18AWG 65X36 TINNED COPPER

0.144 [3.66] O.D. PVC INSULATION


AVAILABLE IN TEN COLORS.

4. PERFORMANCE

MAXIMUM CURRENT: 4.0 AMPS

MAXIMUM VOLTAGE: 5000 W.V.D.C.

MAXIMUM TEMPERATURE: 221°F (105°C)

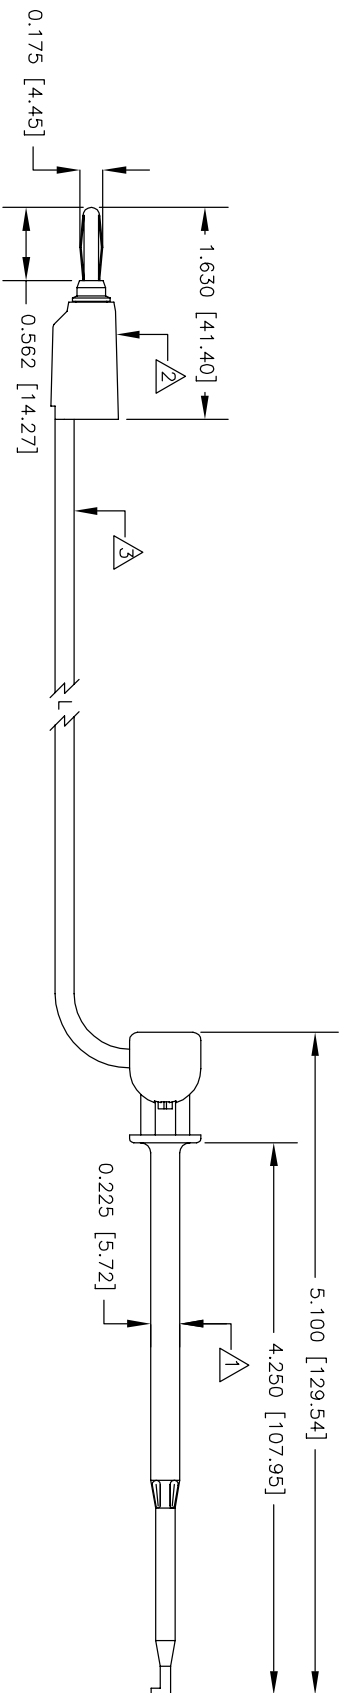

REVISIONS		DATE	APPROVED
LTR	DESCRIPTION		

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES FRACTIONS, DECIMALS, ANGLES XXX + #		CONTRACT NO.		DESCRIPTION	
		APPROVALS	DATE	E-Z-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.	
		DRAWN	9/10	MINI-HOOK (XL1) TO	
		APPROVED BY		STK BANANA PLUG (9260)	
				SIZE CODE IDENT NO. DRAWING NO.	
				B 08505 601XL1	
				SCALE	SHEET 1 OF 1
				1:1	

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PERMISSION OF E-Z-HOOK, DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN HANDS FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.