


NOTES: UNLESS OTHERWISE SPECIFIED

- P/N: XJLCOLOR
HOUSING & PLUNGER: MOLDED NYLON TYPE 6.6. AVAILABLE IN TEN COLORS.
CONTACT BLADE: NICKEL SILVER ALLOY CA 770.
SPRING: STAINLESS STEEL TYPE 302.

- P/N: 9214COLOR
HOUSING: MOLDED ACETAL. AVAILABLE IN BLACK OR RED.
FRAME: BRASS, NICKEL PLATED
CONTACT: BcCu OR PHOSPHOR BRONZE, NICKEL PLATED.

- P/N: W-600/COLOR
18AWG 65X36 TINNED COPPER
0.144 [3.66] O.D. PVC INSULATION
AVAILABLE IN TEN COLORS.

- PERFORMANCE
MAXIMUM CURRENT: 4.0 AMPS
MAXIMUM VOLTAGE: 5000 W.V.D.C.
MAXIMUM TEMPERATURE: 221°F (105°C)

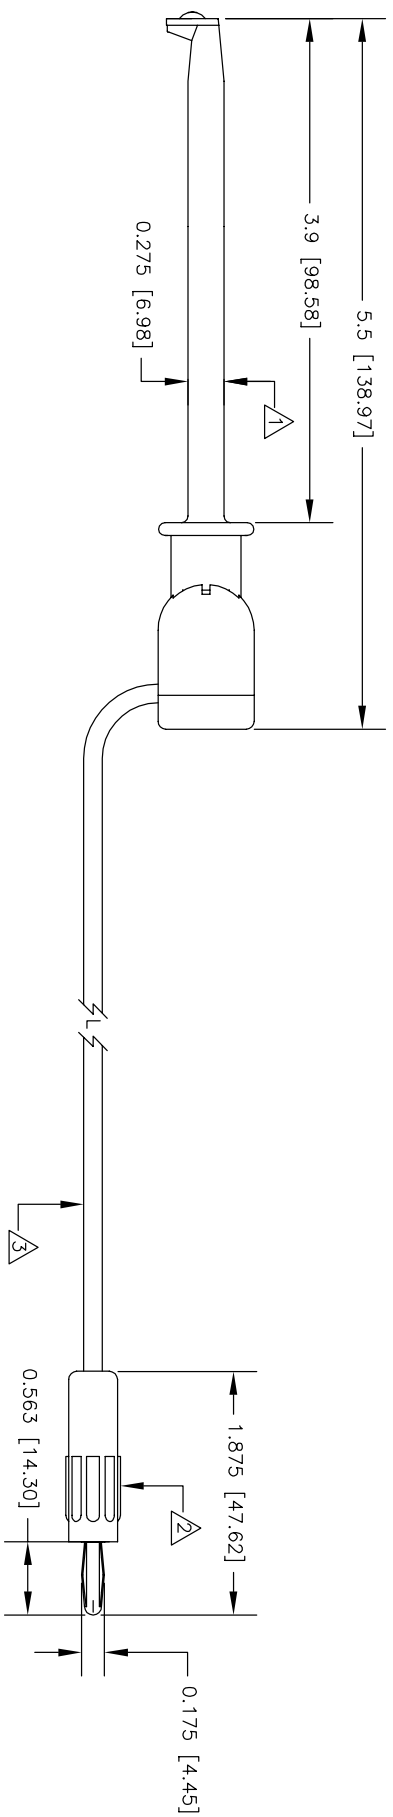

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES FRACTIONS DECIMALS ANGLES .XXX + °		CONTRACT NO.	
APPROVALS	DATE	APPROVALS	DATE
R.L	10/10	R.L	10/10
DRAWN BY		APPROVED BY	
MATERIAL		FINISH	
SEE NOTE.		SEE NOTE.	
NEXT ASSY		USED ON	
APPLICATION		DO NOT SCALE DRAWING	

E-ZHOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.

DESCRIPTION: MACRO-HOOK (XJL) TO STD BAN PLUG (9214)

SIZE: B CODE: 08505 IDENT NO: BXJL DRAWING NO.

SCALE: 1:1 SHEET 1 OF 1

REVISIONS		DATE	APPROVED
LTR	DESCRIPTION		

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PERMISSION OF E-Z-HOOK, DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.