


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: XELCOLOR HOUSING & PLUNGER & SLIDE: MOLDED NYLON 6,6. AVAILABLE IN TEN COLORS. CONTACT NEEDLE: STAINLESS STEEL. BANANA SOCKER: 360 1/2 HD. BRASS. COMPRESSION SPRING: STAINLESS STEEL.
2. P/N: 9274COLOR INSULATOR: MOLDED PVC. AVAILABLE IN TEN COLORS. ALLIGATOR: STEEL. NICKEL PLATED.
3. P/N: W-600/COLOR 18AWG 65X36 TINNED COPPER 0.144 [3.66] O.D. PVC INSULATION AVAILABLE IN TEN COLORS.
4. PERFORMANCE  
 MAXIMUM CURRENT: 4.0 AMPS  
 MAXIMUM VOLTAGE: 5000 W.V.D.C.  
 MAXIMUM TEMPERATURE: 221°F (105°C)

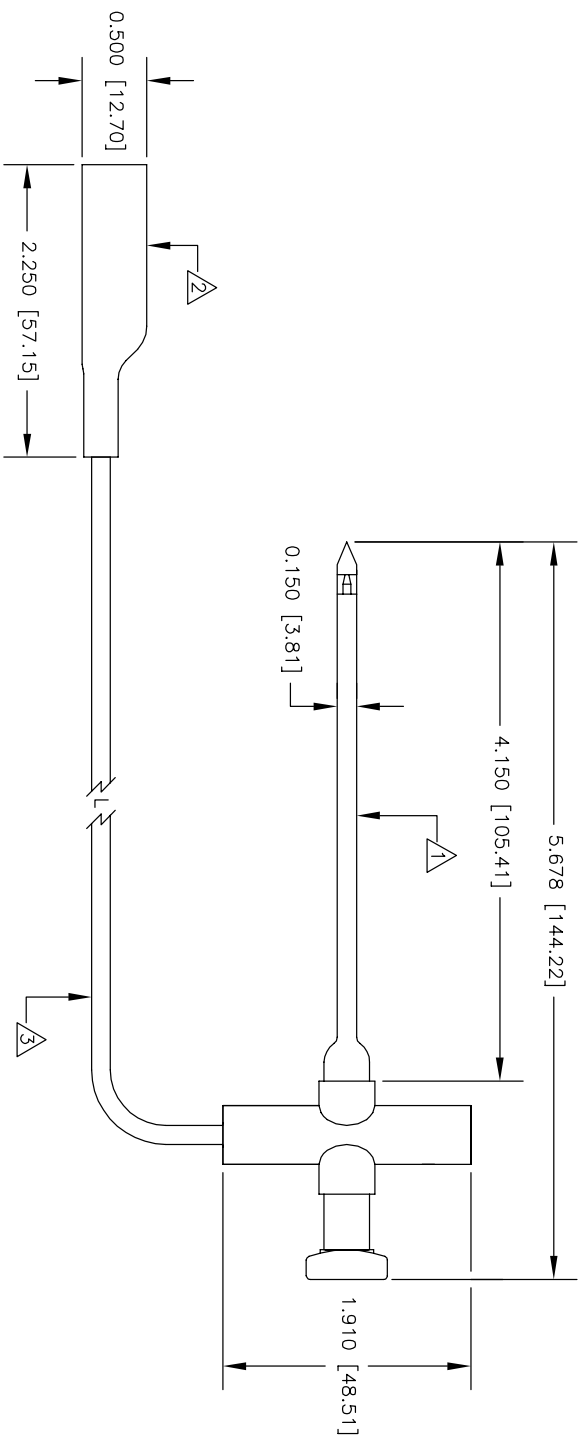

REVISIONS		DATE	APPROVED
LTR			

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES FRACTIONS DECIMALS ANGLES .XXX #		CONTRACT NO.	
DRAWN R.L.		APPROVALS	DATE
MATERIAL SEE NOTE.		APPROVED BY	10/10
FINISH SEE NOTE.			
NEXT ASSY USED ON			
APPLICATION DO NOT SCALE DRAWING			
DESCRIPTION <b>E-ZHOOK</b> DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A. MACRO-HOOK (XEL) TO STD ALLIGATOR (9274)		SIZE	SCALE
CODE IDENT NO. DRAWING NO.		B 08505	1:1
REVISIONS		619XEL	

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PERMISSION OF E-Z-HOOK, DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN HANDS FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.