

NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: XELCOLOR
HOUSING & PLUNGER & SLIDE: MOLDED NYLON 6,6.
AVAILABLE IN TEN COLORS.


CONTACT NEEDLE: STAINLESS STEEL.
BANANA SOCKER: 360 1/2 HD. BRASS.
COMPRESSION SPRING: STAINLESS STEEL.

2. P/N: 9214COLOR
HOUSING: MOLDED ACETAL. AVAILABLE IN BLACK OR RED.
FRAME: BRASS, NICKEL PLATED.
CONTACT: BeCu OR PHOSPHOR BRONZE, NICKEL PLATED.

3. P/N: W-600/COLOR
18AWG 65X36 TINNED COPPER
0.144 [3.66] O.D. PVC INSULATION
AVAILABLE IN TEN COLORS.

4. PERFORMANCE
MAXIMUM CURRENT: 4.0 AMPS
MAXIMUM VOLTAGE: 5000 W.V.D.C.
MAXIMUM TEMPERATURE: 221°F (105°C)

REVISIONS		DATE	APPROVED
LTR			

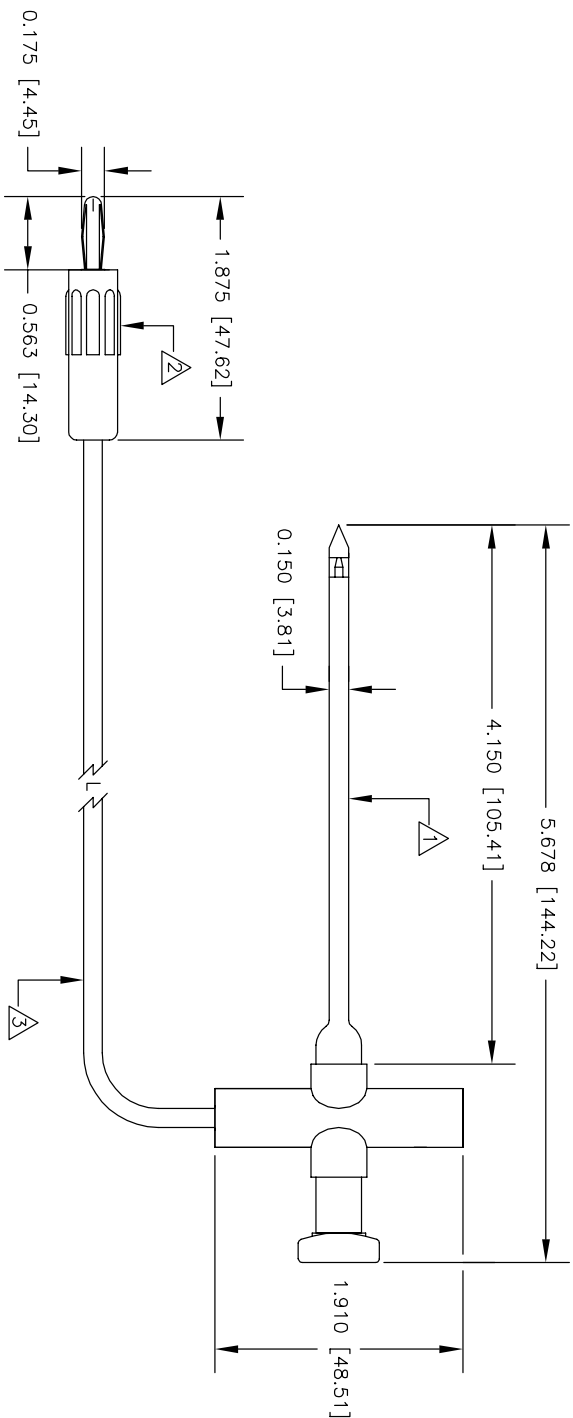

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES FRACTIONS, DECIMALS, ANGLES XXX + # .XXX + #		CONTRACT NO.	
DRAWN R.L		APPROVALS	DATE
MATERIAL SEE NOTE.		APPROVED BY	9/10
FINISH SEE NOTE.			
NEXT ASSY USED ON			
APPLICATION DO NOT SCALE DRAWING			
DESCRIPTION MACRO-HOOK (XEL) TO STD BANANA PLUG (9214)		E-ZHOOK® DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.	
SIZE B	CODE 08505	DRAWING NO. BXEL	REVISION 1
SCALE 1:1	SHEET 1 OF 1		

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PERMISSION OF E-Z-HOOK, DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.