**S+M** Siemens Matsushita Components


SAW Components	B4044
Low Loss Filter for Mobile Communication	422,18 MHz
Data Sheet	

# Features

- Low loss RF filter for Japan family radio system
- Low amplitude ripple
- High image frequency suppression
- Package for Surface Mounted Technology (SMT)
- No matching network required for operation at 50  $\Omega$

## Terminals


• Ni, gold-plated

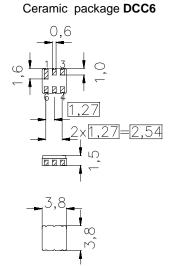

Dimensions in mm, approx. weight 0,13 g

## **Pin configuration**

2	Input
5	Output
1, 3, 4, 6	To be grounded



Туре	Ordering code	Marking and Package according to	Packing according to
B4044	B39421-B4044-Z610	C61157-A7-A41	F61074-V8030-Z000

Electrostatic Sensitive Device (ESD)

#### **Maximum ratings**

Operable temperature range	Т	-20 / +60	°C
Storage temperature range	T <sub>stg</sub>	-40 / +85	°C
DC voltage	V <sub>DC</sub>	0	V
Source power	Ps	10	dBm

Preliminary format of data sheet. Terms of delivery and rights to change design reserved. Page 1 of 3

SMAP PR SAW DC May 27, 1999 Siemens Matsushita Components

SAW Components	B4044
Low Loss Filter for Mobile Communication	422,18 MHz

Data Sheet

## Characteristics

Operating temperature range:	Т	= -20 to +60 °C
Terminating source impedance:	$Z_{S}$	= 50 Ω
Terminating load impedance:	$Z_{L}$	= 50 Ω


		min.	typ.	max.	
Center frequency	f <sub>c</sub>	_	422,18		MHz
Maximum insertion attenuation	$\alpha_{max}$				
421,95 422,40 MHz		_	2,2	2,8	dB
Amplitude ripple (p-p)	Δα				
421,95 422,40 MHz		_	0,3	1,0	dB
Attenuation	$\alpha_{min}$				
320,00 378,00 MHz		50,0	60,0	—	dB
378,00 379,00 MHz		55,0	70,0	—	dB
379,00 412,00 MHz		12,0	20,0	—	dB
485,00 520,00 MHz		50,0	60,0		dB
Impedance at 422,18 MHz					
Input: $Z_{IN} = R_{IN} \parallel C_{IN}$		_	50    1,0	—	Ω    pF
Output: $Z_{OUT} = R_{OUT} \parallel C_{OUT}$		_	50    1,0	—	Ω    pF
Temperature coefficient of frequency	TC <sub>f</sub>	_	-70	_	ppm/K

Preliminary format of data sheet. Terms of delivery and rights to change design reserved. Page 2 of 3


SMAP PR SAW DC May 27, 1999 Siemens Matsushita Components SAW Components Low Loss Filter for Mobile Communication

**Data Sheet** 

#### **Transfer function**

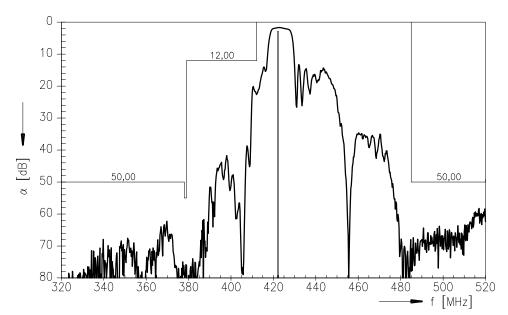

Transfer function (wideband)

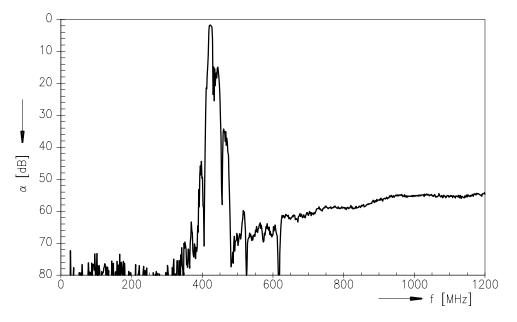

Preliminary format of data sheet. Terms of delivery and rights to change design reserved. Page 3 of 3

SMAP PR SAW DC May 27, 1999