
Pomona®

Model 5270 Retractable Sheath Banana Plug To Minigrabber® Patch Cord

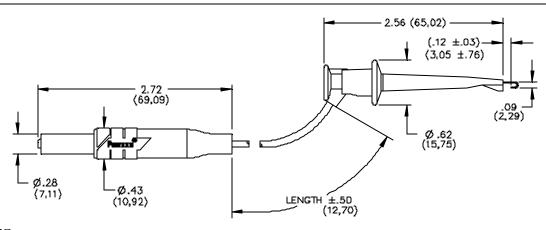

FEATURES:

Retractable sheath is ideal for older equipment not having double insulated jacks.

MATERIALS:

Retractable Sheath Banana Plug:

Plug Body: Brass, Nickel Plated

Banana Plug Spring: Beryllium Copper, Nickel Plated

Compression Spring: Stainless Steel

Tip: Nylon, Color Matches Color of Wire.

Insulation: Nylon, Molded to the Plug Body and Wire.

Marking: None

Wire: 20 AWG, Stranding 41 x 36 t.c., PVC Insulated .087 (2,21 mm) O.D.

Marking: Pomona 5270-XX

Color: Referenced by Part Number

Minigrabber®:

Contact: Beryllium Copper, Gold Plated

Spring: Stainless Steel

Insulation: Nylon, Color Matches Color of Wire

Marking: POMONA ELECTRONICS MINIGRABBER®

RATINGS:

Operating Temperature: +55°C Max. Operating Voltage: 300 VRMS/DC

Current: 5 Amperes

ORDERING EXAMPLE: Model 5270-XX-*

XX = Wire Length, Standard Lengths: 12" (30,48cm), 24" (60,96cm), 36" (91,44cm), 48" (121,92cm),

60" (152,4cm). Additional lengths can be quoted upon request.

* = Color, -0 Black, -2 Red Ordering Example: 5270-12-2 Patch Cord is 12" (30,48cm), Color is Red.

All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02$ " (,51 mm), $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies. Made in USA

6/9/99 SY/FH/LS

Sales: 800-490-2361 Fax: 888-403-3360 Technical Assistance: 800-241-2060 C:\Laura Goldberg\FlukeDataSheet\d5270_1_01.doc

Pomona ACCESS 90630 (800) 444-6785 or (425) 446-6010 More drawings available at www.pomonaelectronics.com

Page 1 of 1