

LM258/A, LM358/A, LM2904 DUAL OPERATIONAL AMPLIFIER

DUAL OPERATIONAL AMPLIFIERS




The LM258 series consists of four independent, high gain, internally Frequency compensated operational amplifiers which were designed specifically to operate from a single power supply over a wide range of voltage.

Operation from split power supplies is also possible and the low power Supply current drain is independent of the magnitude of the power Supply voltage. Application areas include transducer amplifier, DC gain blocks and all the conventional OP amp circuits which now can be easily implemented in single 8 SOP power supply system.


FEATURES

- Internally frequency compensated for unity gain
- Large DC voltage gain: 100dB
- Wide power supply range: LM258/A, LM358/A: 3V~32V (or $\pm 1.5V\sim 16V$)
LM2904: 3V~26V (or $\pm 1.5V\sim 13V$)
- Input common-mode voltage range Includes ground
- Large output voltage swing: 0V DC to $V_{cc} - 1.5V$ DC
- Power drain suitable for battery operation.

BLOCK DIAGRAM

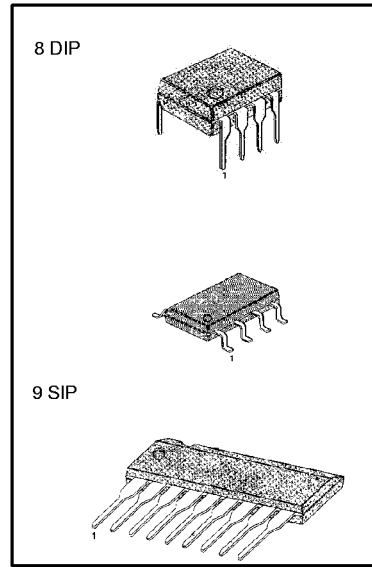

SCHEMATIC DIAGRAM (One section only)

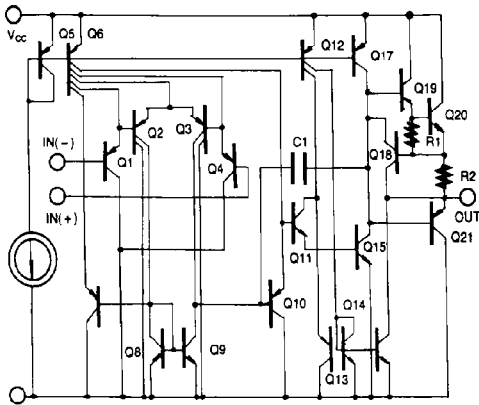

ORDERING INFORMATION

Device	Package	Operating Temperature
LM358N LM358AN	8 DIP	0 ~ +70°C
LM358S LM358AS	9 SIP	
LM358M LM358AM	8 SOP	-25 ~ +85°C
LM258N LM258AN	8 DIP	
LM258S LM258AS	9 SIP	
LM258M LM258AM	8 SOP	-40 ~ +85°C
LM2904N	8 DIP	
LM2904S	9 SIP	
LM2904M	8 SOP	

LM258/A, LM358/A, LM2904 DUAL OPERATIONAL AMPLIFIER

ABSOLUTE MAXIMUM RATINGS

Characteristic	Symbol	LM258/LM258A	LM358/LM358A	LM2904	Unit
Supply Voltage	V_{CC}	± 16 or 32	± 16 or 32	± 13 or 26	V
Differential Input Voltage	$V_{I(DIFF)}$	32	32	26	V
Input Voltage	V_I	-0.3 to +32	-0.3 to +32	-0.3 to +26	V
Output Short Circuit to GND $V_{CC} \leq V$, $T_A = 25^\circ\text{C}$ (One Amp)		Continuous	Continuous	Continuous	
Operating Temperature Range	T_{OPR}	-25 ~ + 85	0 ~ + 70	-40 ~ + 85	$^\circ\text{C}$
Storage Temperature Range	T_{STA}	-65 ~ + 150	-65 ~ + 150	-65 ~ + 150	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS

($V_{CC} = 5.0\text{V}$, $V_{EE} = \text{GND}$, $T = 25^\circ\text{C}$, unless otherwise specified)

Characteristic	Symbol	Test Conditions	LM258			LM358			LM2904			Unit	
			Min	Typ	Max	Min	Typ	Max	Min	Typ	Max		
Input Offset Voltage	V_{IO}	$V_{CM} = 0\text{V}$ to $V_{CC} - 1.5\text{V}$ $V_{O(P)} = 1.4\text{V}$, $R_S = 0\Omega$		2.9	5.0		2.9	7.0		2.9	7.0	mV	
Input Offset Current	I_{IO}			3	30		5	50		5	50	nA	
Input Bias Current	I_{BIAS}			45	150		45	250		45	250	nA	
Input Common-Mode Voltage Range	$V_{I(R)}$	$V_{CC} = 30\text{V}$ (KA2904, $V_{CC} = 26\text{V}$)	0		$V_{CC} - 1.5$	0		$V_{CC} - 1.5$	0		$V_{CC} - 1.5$	V	
Supply Current	I_{CC}	$R_L = \infty$, $V_{CC} = 30\text{V}$ (KA2902, $V_{CC} = 26\text{V}$)		0.8	2.0		0.8	2.0		0.8	2.0	mA	
		$R_L = \infty$, over full temperature range		0.5	1.2		0.5	1.2		0.5	1.2	mA	
Large Signal Voltage Gain	G_V	$V_{CC} = 15\text{V}$, $R_L \geq 2\text{K}\Omega$ $V_{O(P)} = 1\text{V}$ to 11V	50	100		25	100		25	100		V/mV	
Output Voltage Swing	$V_{O(H)}$ $V_{O(L)}$	$V_{CC} = 30\text{V}$ $R_L = 2\text{K}\Omega$		26			26			22		V	
		$V_{CC} = 26\text{V}$ for 2904 $R_L = 10\text{K}\Omega$		27	28		27	28		23	24		V
		$V_{CC} = 5\text{V}$, $R_L \geq 10\text{K}\Omega$		5	20		5	20		5	100		mV
Common-Mode Rejection Ratio	CMRR		70	85		65	80		50	80		dB	
Power Supply Rejection Ratio	PSRR		65	100		65	100		50	100		dB	
Channel Separation	CS	$f = 1\text{KHz}$ to 20KHz		120			120			120		dB	
Short Circuit to GND	I_{SC}			40	60		40	60		40	60	mA	
Output Current	I_{SOURCE} I_{SINK}	$V_{I(+)} = 1\text{V}$, $V_{I(-)} = 0\text{V}$ $V_{CC} = 15\text{V}$, $V_{O(P)} = 2\text{V}$	10	30		10	30		10	30		mA	
		$V_{I(+)} = 0\text{V}$, $V_{I(-)} = 1\text{V}$ $V_{CC} = 15\text{V}$, $V_{O(P)} = 2\text{V}$	10	15		10	15		10	15		mA	
		$V_{I(+)} = 0\text{V}$, $V_{I(-)} = 1\text{V}$ $V_{CC} = 15\text{V}$, $V_{O(P)} = 200\text{mA}$	12	100		12	100						μA
Differential Input Voltage	$V_{I(DIFF)}$				V_{CC}			V_{CC}		V_{CC}		V	

LM258/A, LM358/A, LM2904 DUAL OPERATIONAL AMPLIFIER

ELECTRICAL CHARACTERISTICS

($V_{CC}=5.0V$, $V_{EE}=GND$, unless otherwise specified)

The following specification apply over the range of $-25^{\circ}C \leq T_A \leq +85^{\circ}C$ for the KA258; and the $0^{\circ}C \leq T_A \leq +70^{\circ}C$ for the LM358; and the $-40^{\circ}C \leq T_A \leq +85^{\circ}C$ for the LM2904

Characteristic	Symbol	Test Conditions	LM258			LM358			LM2904			Unit
			Min	Typ	Max	Min	Typ	Max	Min	Typ	Max	
Input Offset Voltage	V_{IO}	$V_{CM} = 0V$ to $V_{CC} = 1.5V$ $V_{OP} = 1.4V$, $R_S = 0\Omega$			7.0			9.0			10.0	mV
Input Offset Voltage Drift	V_{IO}	$R_S = 0\Omega$		7.0			7.0			7.0		$\mu V/^{\circ}C$
Input Offset Current	I_{IO}				100			150		45	200	nA
Input Offset Current Drift	$\Delta I_{IO}/\Delta T$			10			10			10		$pA/^{\circ}C$
Input Bias Current	I_{BIAS}			40	300		40	500		40	500	nA
Input Common-Mode Voltage Range	$V_{I(R)}$	$V_{CC} = 30V$ (KA2904, $V_{CC} = 26V$)	0		$V_{CC} = 2.0$	0		$V_{CC} = 2.0$	0		$V_{CC} = 2.0$	V
Large Signal Voltage Gain	G_V	$V_{CC} = 15V$, $R_L \geq 2.0K\Omega$ $V_{OP} = 1V$ to $11V$	25			15			15			V/mV
Output Voltage Swing	$V_{O(H)}$	$V_{CC} = 30V$				26			26			V
		$V_{CC} = 26V$ for 2904				27	28		27	28		V
	$V_{O(L)}$	$V_{CC} = 5V$, $R_L \geq 10K\Omega$		5	20		5	20		5	20	mV
Output Current	I_{SOURCE}	$V_{I(+)} = 1V$, $V_{I(-)} = 0V$ $V_{CC} = 15V$, $V_{OP} = 2V$	10	30		10	30		10	30		mA
	I_{SINK}	$V_{I(+)} = 0V$, $V_{I(-)} = 1V$ $V_{CC} = 15V$, $V_{OP} = 2V$	5	8		5	9		5	9		mA
Differential Input Voltage	$V_{I(DIFF)}$				V_{CC}			V_{CC}			V_{CC}	V

LM258/A, LM358/A, LM2904 DUAL OPERATIONAL AMPLIFIER

ELECTRICAL CHARACTERISTICS

($V_{CC} = 5.0V$, $V_{EE} = GND$, $T_A = 25^\circ C$, unless otherwise specified)

Characteristic	Symbol	Test Conditions	LM258A			LM358A			Unit
			Min	Typ	Max	Min	Typ	Max	
Input Offset Voltage	V_{IO}	$V_{CM} = 0V$ to $V_{CC} = 1.5V$ $V_{OP} = 1.4V$, $R_S = 0\Omega$		1.0	3.0		2.0	3.0	mV
Input Offset Current	I_{IO}			2	15		5	30	nA
Input Bias Current	I_{BIAS}			40	80		45	100	nA
Input Common-Mode Voltage Range	$V_{I(R)}$	$V_{CC} = 30V$	0		$V_{CC} = 1.5$	0		$V_{CC} = 1.5$	V
Supply Current	I_{CC}	$R_L = \infty$, $V_{CC} = 30V$		0.8	2.0		0.8	2.0	mA
		$R_L = \infty$, over full temperature range		0.5	1.2		0.5	1.2	mA
Large Signal Voltage Gain	G_V	$V_{CC} = 15V$, $R_L \geq 2K\Omega$ $V_O = 1V$ to $11V$	50	100		25	100		V/mV
Output Voltage Swing	V_{OH}	$V_{CC} = 30V$	26			26			V
		$V_{CC} = 26V$ for 2904	27	28		27	28		V
	V_{OL}	$V_{CC} = 5V$, $R_L \geq 10K\Omega$		5	20		5	20	mV
Common-Mode Rejection Ratio	CMRR		70	85		65	85		dB
Power Supply Rejection Ratio	PSRR		65	100		65	100		dB
Channel Separation	CS	$f = 1KHz$ to $20KHz$		120			120		dB
Short Circuit to GND	I_{SC}			40	60		40	60	mA
Output Current	I_{SOURCE}	$V_{I(+)} = 1V$, $V_{I(-)} = 0V$ $V_{CC} = 15V$, $V_{OP} = 2V$	20	30		20	30		mA
	I_{SINK}	$V_{I(+)} = 1V$, $V_{I(-)} = 0V$ $V_{CC} = 15V$, $V_{OP} = 2V$	10	15		10	15		mA
		$V_{in+} = 0V$, $V_{in-} = 1V$ $V_{OP} = 200mV$	12	100		12	100		μA
Differential Input Voltage	$V_{I(DIFF)}$				V_{CC}			V_{CC}	V

LM258/A, LM358/A, LM2904 DUAL OPERATIONAL AMPLIFIER

ELECTRICAL CHARACTERISTICS (V_{CC} = 5.0V, V_{EE} = GND. unless otherwise specified)

The following specification apply over the range of -25°C ≤ T_A ≤ +85°C for the LM258A; and the 0°C ≤ T_A ≤ +70°C for the LM358A

Characteristic	Symbol	Test Conditions	LM258A			LM358A			Unit
			Min	Typ	Max	Min	Typ	Max	
Input Offset Voltage	V _{IO}	V _{CM} = 0V to V _{CC} = 1.5V V _{OP} = 1.4V, R _S = 0Ω			4.0			5.0	mV
Input Offset Voltage Drift	ΔV _{IO} /ΔT			7.0	15		7.0	20	μV/°C
Input Offset Current	I _{IO}				30			75	nA
Input Offset Current Drift	ΔI _{IO} /ΔT			10	200		10	300	pA/°C
Input Bias Current	I _{BIAS}			40	100		40	200	nA
Input Common-Mode Voltage Range	V _{I(R)}	V _{CC} = 30V	0		V _{CC} = 2.0	0		V _{CC} = 2.0	V
Output Voltage Swing	V _{O(H)}	V _{CC} = 30V, R _L = 2KΩ	26			26			V
		V _{CC} = 30V, R _L = 10KΩ	27	28		27	28		V
	V _{O(L)}	V _{CC} = 5V, R _L ≥ 10KΩ		5	20		5	20	mV
Large Signal Voltage Gain	G _V	V _{CC} = 15V, R _L ≥ 2.0KΩ V _{OP} = 1V to 11V	25			15			V/mV
Output Current	I _{SOURCE}	V _{I(+)} = 1V, V _{I(-)} = 0V V _{CC} = 15V, V _{OP} = 2V	10	30		10	30		mA
	I _{SINK}	V _{I(+)} = 1V, V _{I(-)} = 0V V _{CC} = 15V, V _{OP} = 2V	5	9		5	9		mA
Differential Input Voltage	V _{I(DIFF)}				V _{CC}			V _{CC}	V

LM258/A, LM358/A, LM2904 DUAL OPERATIONAL AMPLIFIER

TYPICAL PERFORMANCE CHARACTERISTICS

Fig. 1 SUPPLY CURRENT

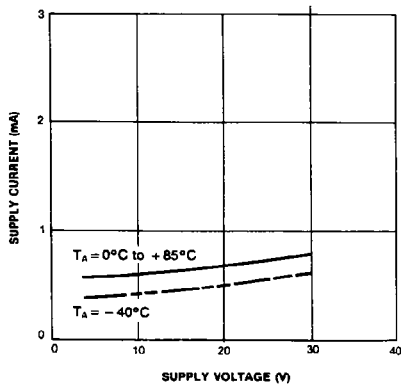


Fig. 2 VOLTAGE GAIN

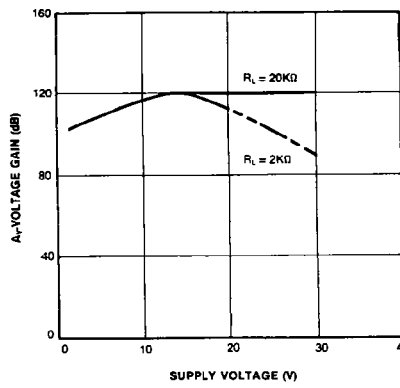


Fig. 3 OPEN LOOP FREQUENCY RESPONSE

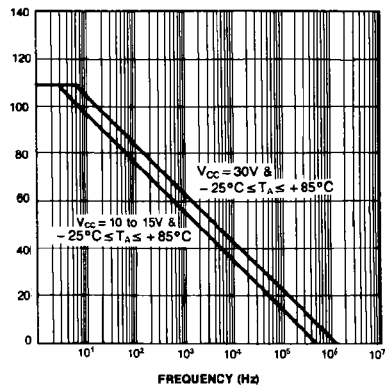


Fig. 4 LARGE SIGNAL FREQUENCY

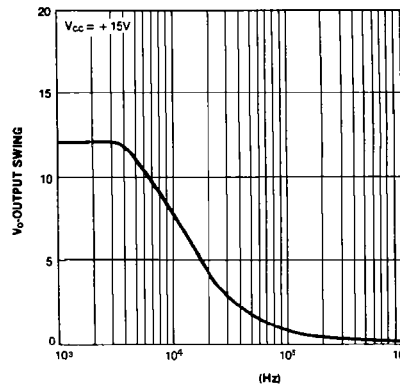


Fig. 5 OUTPUT CHARACTERISTICS CURRENT SOURCING


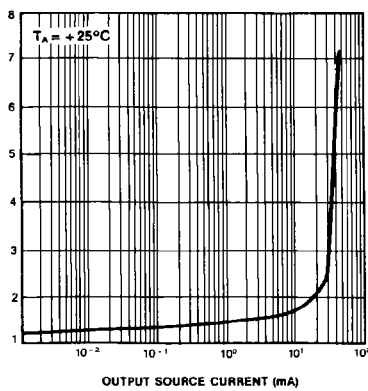


Fig. 6 OUTPUT CHARACTERISTICS CURRENT SINKING

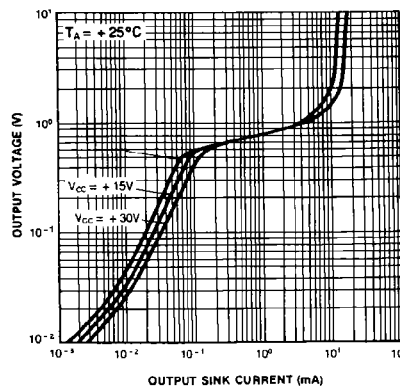

LM258/A, LM358/A, LM2904 DUAL OPERATIONAL AMPLIFIER

Fig. 7 INPUT VOLTAGE RANGE

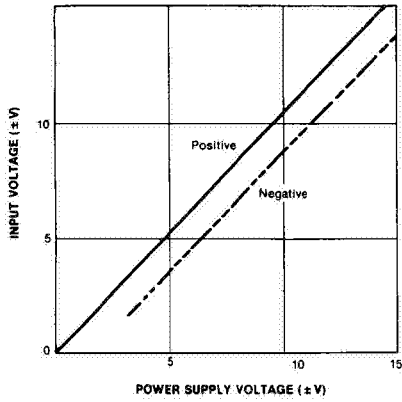


Fig. 8 COMMON-MODE REJECTION RATIO

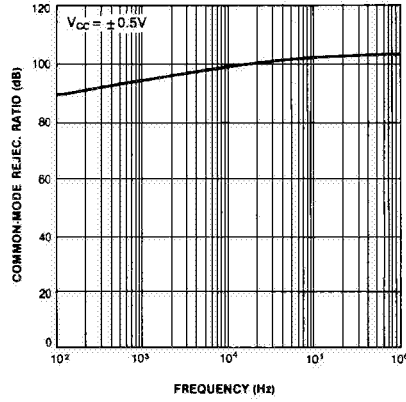


Fig. 9 CURRENT LIMITING

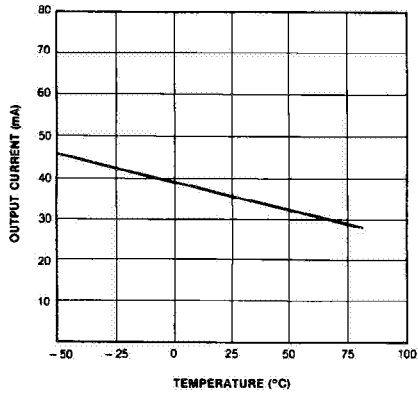


Fig. 10 INPUT CURRENT

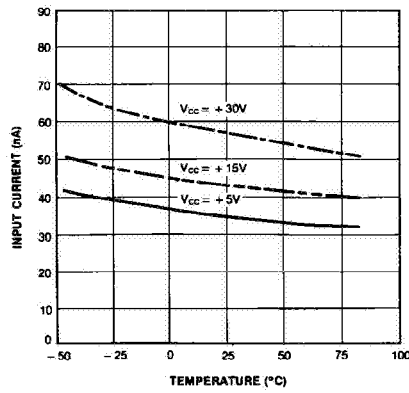


Fig. 11 VOLTAGE FOLLOWER PULSE RESPONSE


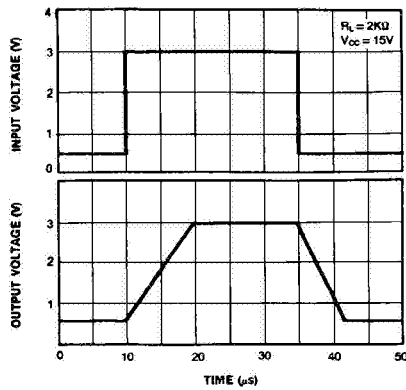


Fig. 12 VOLTAGE FOLLOWER PULSE RESPONSE (SMALL SIGNAL)

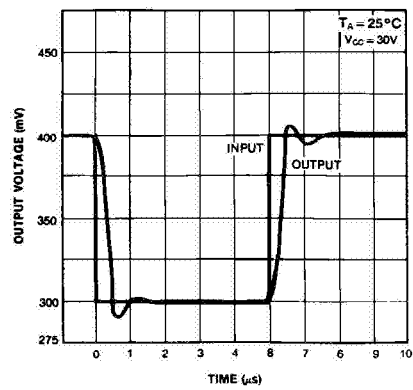

TRADEMARKS

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

ACE ^x ™	ISOPLANAR™
CoolFET™	MICROWIRE™
CROSSVOLT™	POP™
E ² CMOS™	PowerTrench™
FACT™	QS™
FACT Quiet Series™	Quiet Series™
FAST®	SuperSOT™-3
FASTr™	SuperSOT™-6
GTO™	SuperSOT™-8
HiSeC™	TinyLogic™

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

PRODUCT STATUS DEFINITIONS

Definition of Terms

Datasheet Identification	Product Status	Definition
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.