



LM317

LINEAR INTEGRATED CIRCUIT


HIGH CURRENT 1.3V TO 37V ADJUSTABLE VOLTAGE REGULATOR

DESCRIPTION

The UTC **LM317** is an adjustable 3-terminal positive voltage regulator, designed to supply 1A of output current with voltage adjustable from 1.3V ~ 37V.

FEATURES

- *Output voltage adjustable from 1.3V ~ 37V
- *Output current in excess of 1A
- *Internal short circuit protection.
- *Internal over temperature protection.
- *Output transistor safe area compensation

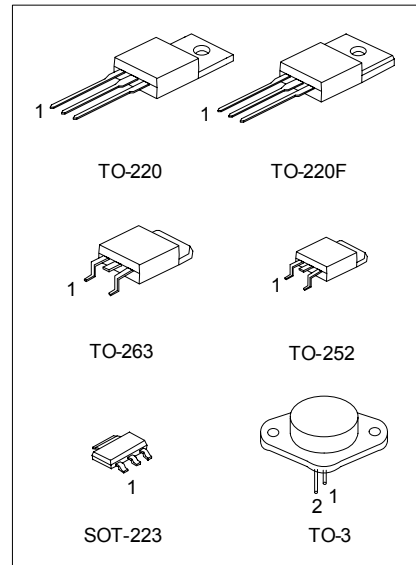

*Pb-free plating product number: LM317K


ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Normal	Lead Free Plating		1	2	3	
LM317-AA3-R	LM317K-AA3-R	SOT-223	ADJ	O	I	Tape Reel
LM317-TA3-T	LM317K-TA3-T	TO-220	ADJ	O	I	Tube
LM317-TF3-T	LM317K-TF3-T	TO-220F	ADJ	O	I	Tube
LM317-TN3-R	LM317K-TN3-R	TO-252	ADJ	O	I	Tape Reel
LM317-TN3-T	LM317K-TN3-T	TO-252	ADJ	O	I	Tube
LM317-TQ2-R	LM317K-TQ2-R	TO-263	ADJ	O	I	Tape Reel
LM317-TQ2-T	LM317K-TQ2-T	TO-263	ADJ	O	I	Tube
LM317-T30-Y	LM317K-T30-Y	TO-3	I	ADJ	O	Tray

Note: 1. Pin Assignment: I:V_{IN} O:V_{OUT}
 2. Pin 3 on TO-3 is case

<p>LM317K-AA3-R</p>	<p>(1) R: Tape Reel, T: Tube, Y: Tray (2) AA3: SOT-223, TA3: TO-220, TF3: TO-220F, TN 3: TO-252, TQ2: TO-263 (3) K: Lead Free Plating Blank: Pb/Sn</p>
---------------------	--

■ BLOCK DIAGRAM

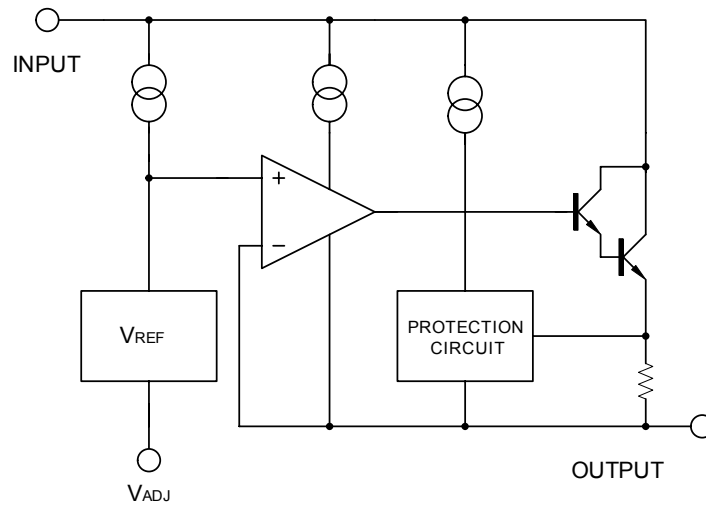

■ ABSOLUTE MAXIMUM RATINGS (Ta=25°C, unless otherwise specified)

PARAMETER	SYMBOL	RATINGS	UNIT
Input - Output Voltage Difference	V _{IN} -V _{OUT}	40	V
Power Dissipation	P _D	Internal limited	
Junction Temperature	T _J	+125	°C
Operating Temperature	T _{OPR}	0 ~ +125	°C
Storage Temperature	T _{STG}	-40 ~ +150	°C

Note:1. Absolute maximum ratings are stress ratings only and functional device operation is not implied. The device could be damaged beyond Absolute maximum ratings.

■ THERMAL DATA

PARAMETER	SYMBOL	RATINGS	UNIT	
Thermal Resistance Junction-Case	TO-252	θ _{JC}	12	/W
	TO-220/TO-220F	θ _{JC}	5	/W
	TO-263	θ _{JC}	5	/W
	SOT-223	θ _{JC}	23	/W
	TO-3	θ _{JC}	3	/W
Thermal Resistance Junction-Ambient	TO-252	θ _{JA}	112	/W
	TO-220/TO-220F	θ _{JA}	54	/W
	TO-263	θ _{JA}	64	/W
	SOT-223	θ _{JA}	165	/W
	TO-3	θ _{JA}	35	/W

■ ELECTRICAL CHARACTERISTICS

(V_{IN}-V_{OUT}=5V, I_{OUT}=10mA, Ta=25°C, unless otherwise specified.)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT	
Line Regulation	ΔV _{OUT} /V _{OUT}	3V V _{IN} -V _{OUT} 40V		0.01	0.04	%/V	
Load Regulation	ΔV _{OUT}	10mA I _{OUT} 1A	V _{OUT} 5V		5	25	mV
				V _{OUT} 5V	0.1	0.5	%
Adjustable Pin Current	I _{ADJ}			50	100	μA	
Adjustable Pin Current Change	ΔI _{ADJ}	3V V _{IN} -V _{OUT} 40V, 10mA I _{OUT} 1A, P _D 20W		0.2	5	μA	
Reference Voltage	V _{REF}	3V V _{IN} -V _{OUT} 40V, 10mA I _{OUT} 1A, P _D 20W	1.20	1.25	1.30	V	
Temperature Stability		T _{MIN} T _J T _{MAX}		0.7		%/V _{OUT}	
Minimum Load Current for Regulation	I _{L(MIN)}	V _{IN} -V _{OUT} =40V		3.5	10	mA	
Maximum Output Current	I _{O(MAX)}	V _{IN} -V _{OUT} =40V, P _D 20W	0.3	0.4		A	
RMS Noise vs. %of V _{OUT}	eN	10Hz f 10KHz		0.003		%/V _{OUT}	
Ripple Rejection	RR	V _{OUT} =10V, f=120Hz	C _{ADJ} =0		65		dB
			C _{ADJ} =10μF	66	80		

Note: C_{ADJ} is connected between Adjust pin and Ground.

APPLICATION CIRCUITS

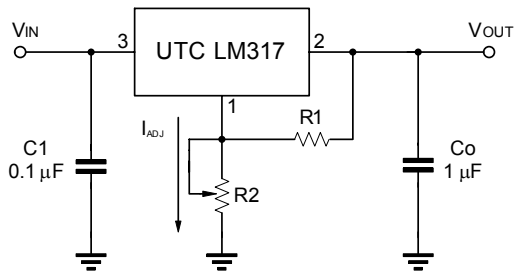


Fig.1 Programmable voltage regulator

$$V_{OUT} = 1.25V * (1 + R2/R1) + I_{ADJ} * R2$$

C 1 is required when regulator is located an appreciated distance from power supply . Co is needed to improve transient response .

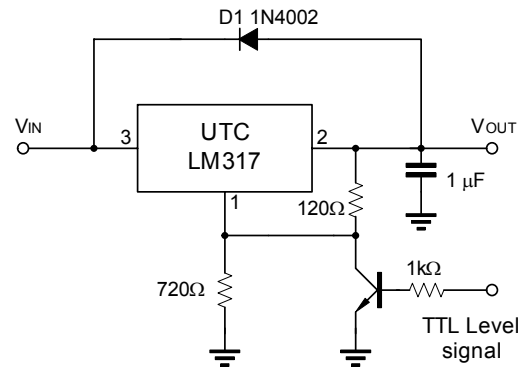


Fig.2 Regulator with On-off control


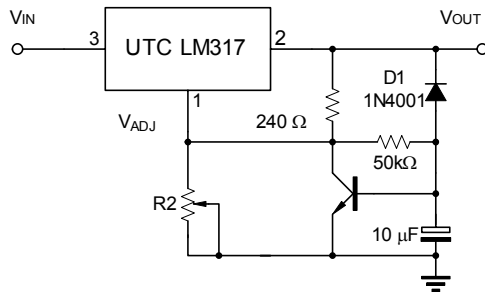


Fig.3 Soft Start Application

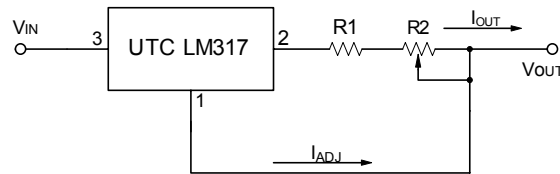

$$I_{O(MAX)} = \left(\frac{V_{REF}}{R1} \right) + I_{ADJ} = \frac{1.25V}{R1}$$

$$I_{O(MIN)} = \left(\frac{V_{REF}}{R1+R2} \right) + I_{ADJ} = \frac{1.25V}{R1+R2}$$

$$5mA < I_{OUT} < 100mA$$

Fig.4 Constant Current Application

TYPICAL CHARACTERISTICS

Fig.1 Load Regulation vs. temperature

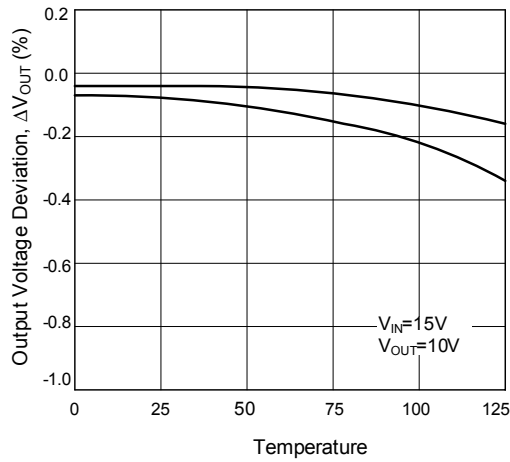


Fig.2 Adjustment Current vs. Temperature

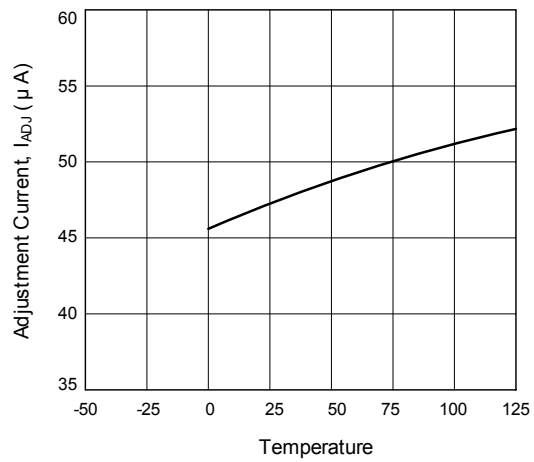


Fig.3 Current Limit


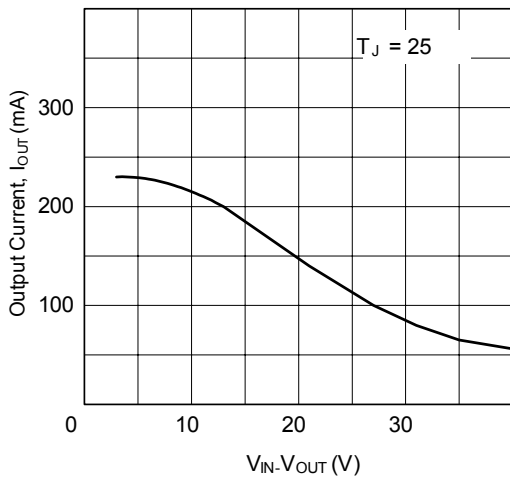


Fig.4 Minimum Operating Current

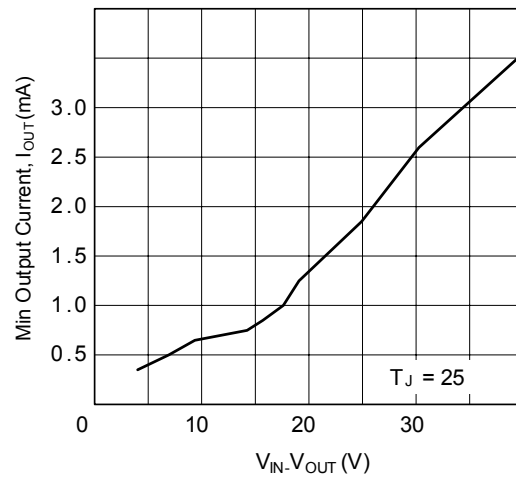

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.