


## Model 5517A Replacement Test Lead For Simpson Reverse Lead Set DMM's

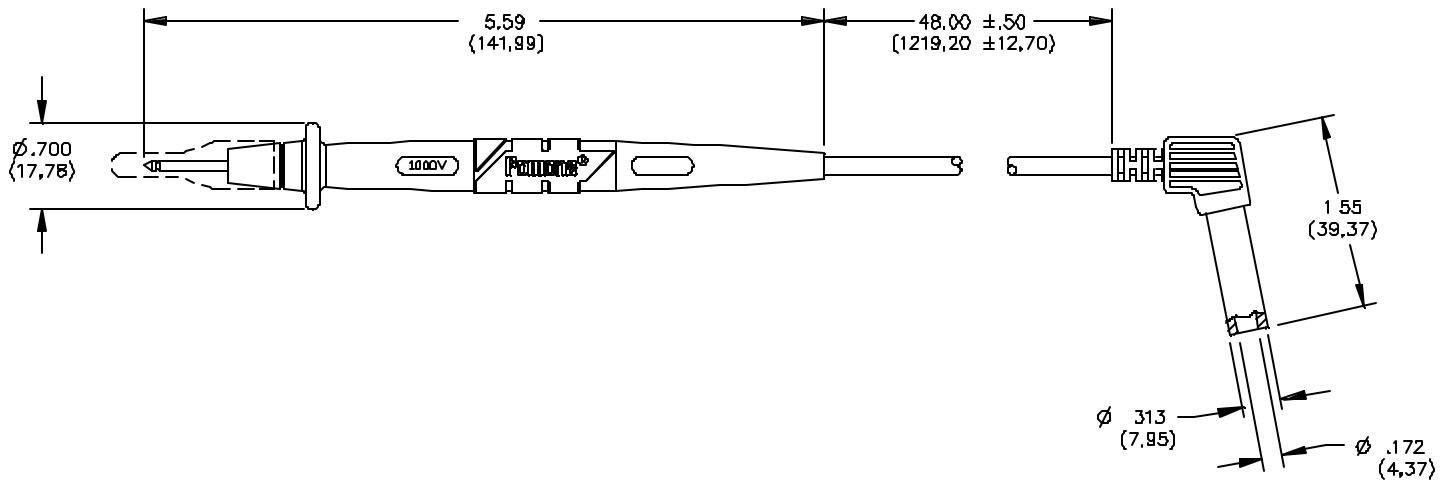

### FEATURES:

- Designed for older Simpson meters with a reverse lead set such as Simpson Models 260-7/-8.
- Probe body incorporates a two step mold process. First step is Polypropylene for probe rigidity. Second step is Santoprene rubber for handling comfort, added insulation protection and wire strain relief.
- Probe test leads are designed with over-voltage spike protection of up to 6kV.
- Probe body and banana jack are molded directly to the wire for robust pull strength.
- Wire is a high strand count silicone wire for extreme flexibility and high temperature resistance.

### MATERIALS:

Probe Body: Santoprene Rubber (Color: Gray) Over Polypropylene: Fire Retardant  
(Color: One Black, One Red)

Tip: Brass, Nickel Plated

Wire: 18 AWG, 65 x 36 Tinned Copper Strand, Silicone Insulation, O.D. .144" (3,66 mm)

Banana Jack: Body – Brass, Nickel Plated

Insulation – PVC, Color: One Black, One Red

### RATINGS:

Operating Voltage: 1000 VRMS/DC

Current: 10 Amperes

### ORDERING INFORMATION: Model 5517A

Includes a set of one black and one red test probes.

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ± .005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA