


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 30COLOR
HOUSING: MOULDED NYLON 6 OR 6.6. AVAILABLE IN TEN COLORS.
CONTACT TIP: STEEL. BRIGHT NICKEL FINISH.
2. P/N: 9214COLOR
HOUSING: MOULDED ACETAL. AVAILABLE IN BLACK OR RED.
FRAME: BRASS. NICKEL PLATED.
CONTACT: BeCu OR PHOSPHOR BRONZE. NICKEL PLATED.
3. P/N: W-600/COLOR
18 AWG 65X36 TINNED COPPER INSULATION
PVC 0.144 [3.66] NOMINAL O.D.
AVAILABLE IN TEN COLORS.
4. PERFORMANCE
MAXIMUM CURRENT: 4.0 AMPS
MAXIMUM VOLTAGE: 5000 W.V.D.C.
MAXIMUM TEMPERATURE: 221°F (105°C)

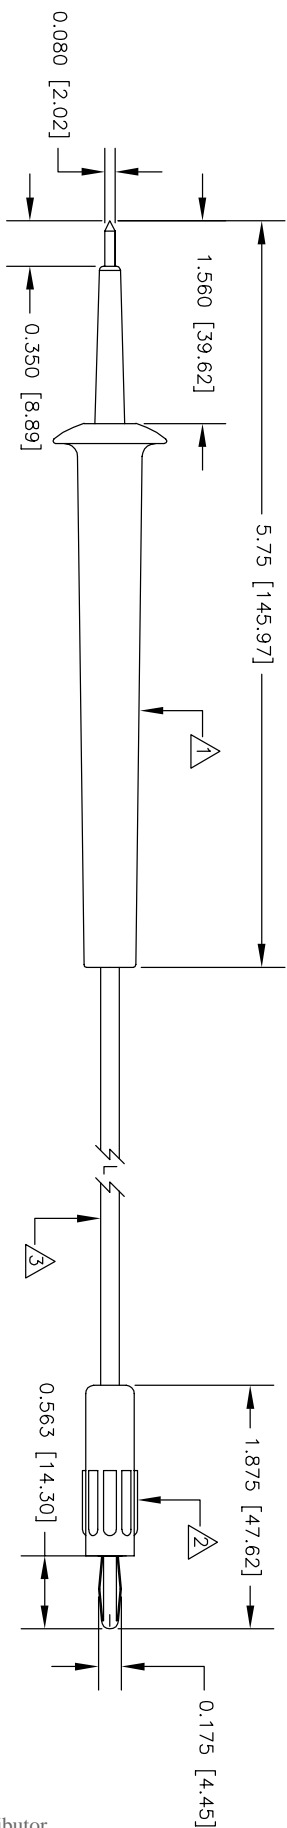

REVISIONS		DATE	APPROVED
LTR	DESCRIPTION		

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES FRACTIONS DECIMALS ANGLES .XXX + #		CONTRACT NO.	
DO NOT SCALE DRAWING		APPROVALS	DATE
MATERIAL SEE NOTE.		R.L.	11/10
FINISH SEE NOTE.		APPROVED BY	
NEXT ASSY USED ON			
APPLICATION			
DESCRIPTION		E-ZHOOK® DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.	
STD BAN PLUG (9214)		PROBE (30) TO	
SIZE	CODE IDENT NO.	DRAWING NO.	REV
B	08505	658	
SCALE	SHEET 1 OF 1		
1:1			

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-Z-HOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PERMISSION OF E-Z-HOOK, DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.