


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: 34COLOR
HOUSING: MOLDED NYLON 6 OR 6.6. AVAILABLE IN TEN COLORS.
CONTACT TIP: STEEL. BRIGHT NICKEL FINISH.

2. P/N: 9302COLOR
HOUSING: MOLDED NYLON 6.6. AVAILABLE IN TEN COLORS.
FRAME: BRASS, NICKEL PLATED.
CONTACT: BAgCu OR PHOSPHOR BRONZE. NICKEL PLATED.
HARDWARE: STAINLESS STEEL NUT, BRASS EYELET, COPPER, TIN PLATED TERMINAL RING.

3. P/N: W-600/COLOR
18 AWG 65X36 TINNED COPPER INSULATION
PVC 0.144 [3.66] NOMINAL O.D.
AVAILABLE IN TEN COLORS.

4. PERFORMANCE
MAXIMUM CURRENT: 4.0 AMPS
MAXIMUM VOLTAGE: 5000 W.V.D.C.
MAXIMUM TEMPERATURE: 221°F (105°C)

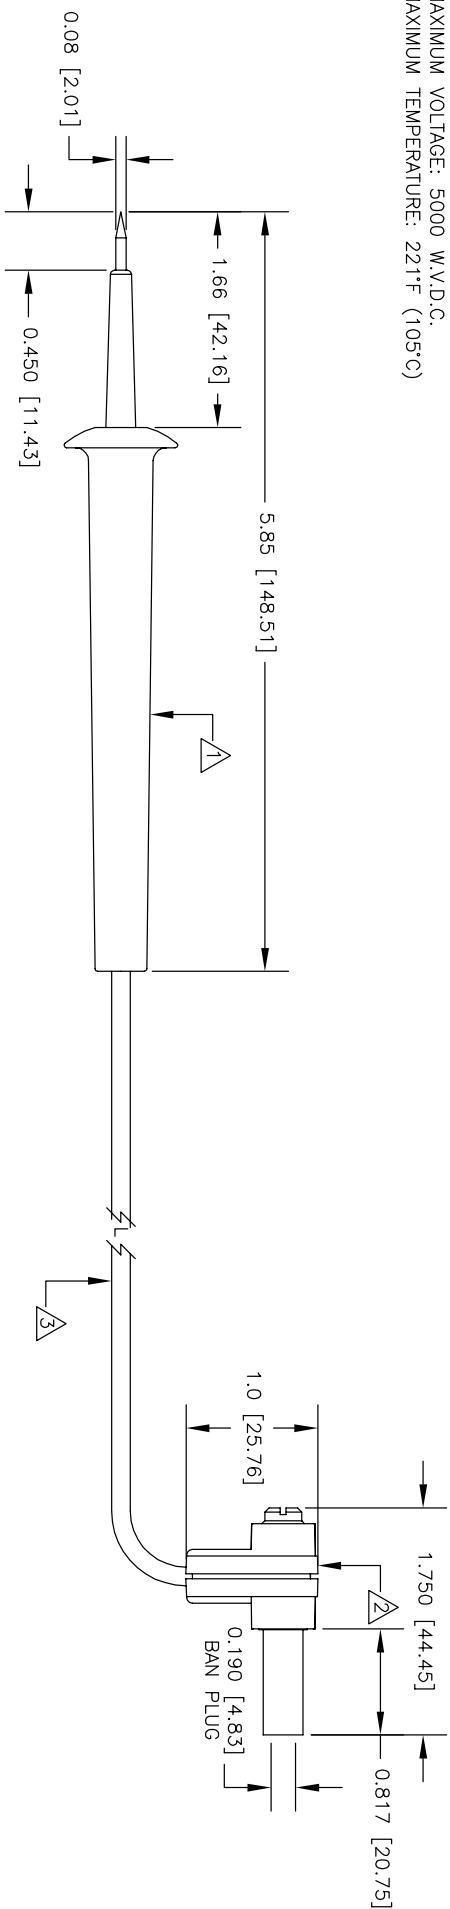

REVISIONS		DATE	APPROVED
LTR	DESCRIPTION		

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES FRACTIONS DECIMALS ANGLES .XXX +		CONTRACT NO.	
DRAWN		APPROVALS	DATE
MATERIAL		R.L.	10/10
SEE NOTE.		APPROVED BY	
FINISH			
SEE NOTE.			
NEXT ASSY			
USED ON			
APPLICATION		DO NOT SCALE DRAWING	
DESCRIPTION		E-ZHOOK® DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.	
PROBE (34) TO			
SHRD R/A BAN P/LG (9302)			
SIZE	CODE IDENT NO.	DRAWING NO.	REV
B	08505	63334	
SCALE	1:1	SHEET	1 OF 1

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-ZHOOK. THE INFORMATION IS NOT TO BE REPRODUCED WITHOUT PERMISSION OF E-ZHOOK, DIV. OF TEKTEST INC. MAXIMUM TESTED RATINGS IN HANDS-FREE CONTROLLED ENVIRONMENT. MAXIMUM RATINGS ARE NOT TO BE USED CONCURRENTLY.