

### ACCESSORIES (SUPPLIED WITH KIT)

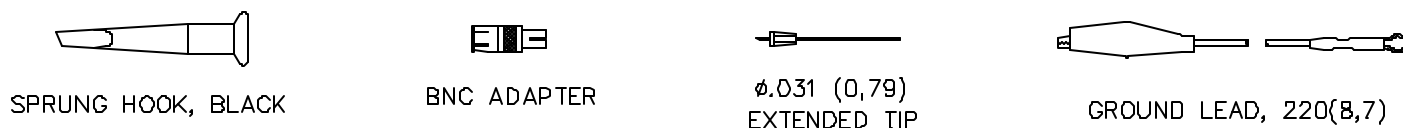


Table				
Diode Turn on Voltage (mv)	Peak AC Input Voltage (v)	Input C(pF)	Bandwidth	DC Isolation V incl. Peak AC V
<b>200</b>	<b>50</b>	<b>5</b>	<b>100kHz to 800MHz</b>	<b>300</b>

### FEATURES:

- Model 5815A is a miniature RF Detector Probe intended for use with a wide range of oscilloscopes.
- This probe is very useful in measuring RF signals up to 800 MHz.
- Provides an output of 1 VDC for an input of 1 VRMS sinewave

**RATINGS:** CAT I, 300 V

### ORDERING INFORMATION: Model 5815A

All dimensions are in inches. Tolerances (except noted): .xx =  $\pm .02$ " (.51 mm), .xxx =  $\pm .005$ " (.127 mm).  
 All specifications are to the latest revisions. Specifications are subject to change without notice.  
 Registered trademarks are the property of their respective companies. Made in USA