


DATA SHEET



BFG520W; BFG520W/X NPN 9 GHz wideband transistors

Product specification
Supersedes data of August 1995

1998 Oct 02

**Philips
Semiconductors**



PHILIPS

NPN 9 GHz wideband transistors**BFG520W; BFG520W/X****FEATURES**

- High power gain
- Low noise figure
- High transition frequency
- Gold metallization ensures excellent reliability.

APPLICATIONS

RF front end wideband applications in the GHz range, such as analog and digital cellular telephones, cordless telephones (CT2, CT3, PCN, DECT, etc.), radar detectors, pagers, satellite television tuners (SATV) and repeater amplifiers in fibre-optic systems.

DESCRIPTION

NPN silicon planar epitaxial transistor in a 4-pin dual-emitter SOT343N plastic package.

MARKING


TYPE NUMBER	CODE
BFG520W	N3
BFG520W/X	N4

QUICK REFERENCE DATA

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
V_{CBO}	collector-base voltage	open emitter	—	—	20	V
V_{CES}	collector-emitter voltage	$R_{BE} = 0$	—	—	15	V
I_C	collector current (DC)		—	—	70	mA
P_{tot}	total power dissipation	$T_s \leq 85^\circ\text{C}$	—	—	500	mW
h_{FE}	DC current gain	$I_C = 20 \text{ mA}; V_{CE} = 6 \text{ V}$	60	120	250	
C_{re}	feedback capacitance	$I_C = 0; V_{CB} = 6 \text{ V}; f = 1 \text{ MHz}$	—	0.35	—	pF
f_T	transition frequency	$I_C = 20 \text{ mA}; V_{CE} = 6 \text{ V}; f = 1 \text{ GHz}; T_{amb} = 25^\circ\text{C}$	—	9	—	GHz
G_{UM}	maximum unilateral power gain	$I_C = 20 \text{ mA}; V_{CE} = 6 \text{ V}; f = 900 \text{ MHz}; T_{amb} = 25^\circ\text{C}$	—	17	—	dB
$ S_{21} ^2$	insertion power gain	$I_C = 20 \text{ mA}; V_{CE} = 6 \text{ V}; f = 900 \text{ MHz}; T_{amb} = 25^\circ\text{C}$	16	17	—	dB
F	noise figure	$\Gamma_s = \Gamma_{opt}; I_C = 5 \text{ mA}; V_{CE} = 6 \text{ V}; f = 900 \text{ MHz}$	—	1.1	1.6	dB

PINNING

PIN	DESCRIPTION	
	BFG520W	BFG520W/X
1	collector	collector
2	base	emitter
3	emitter	base
4	emitter	emitter



Top view MBK523

Fig.1 Simplified outline SOT343N.

NPN 9 GHz wideband transistors

BFG520W; BFG520W/X

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{CBO}	collector-base voltage	open emitter	–	20	V
V_{CES}	collector-emitter voltage	$R_{BE} = 0$	–	15	V
V_{EBO}	emitter-base voltage	open collector	–	2.5	V
I_C	collector current (DC)		–	70	mA
P_{tot}	total power dissipation	$T_s \leq 85^\circ\text{C}$; see Fig.2; note 1	–	500	mW
T_{stg}	storage temperature		–65	+150	°C
T_j	junction temperature		–	175	°C

Note

1. T_s is the temperature at the soldering point of the collector pin.

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
$R_{th j-s}$	thermal resistance from junction to soldering point	$T_s \leq 85^\circ\text{C}$; note 1	180	K/W

Note

1. T_s is the temperature at the soldering point of the collector pin.

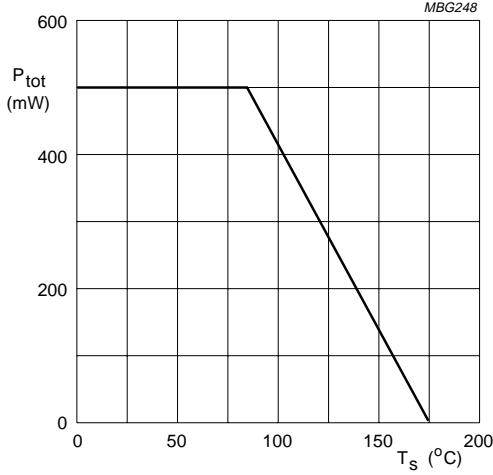


Fig.2 Power derating curve.

NPN 9 GHz wideband transistors

BFG520W; BFG520W/X

CHARACTERISTICS $T_j = 25^\circ\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
$V_{(\text{BR})\text{CBO}}$	collector-base breakdown voltage	$I_C = 10 \mu\text{A}; I_E = 0$	20	—	—	V
$V_{(\text{BR})\text{CES}}$	collector-emitter breakdown voltage	$I_C = 10 \mu\text{A}; R_{BE} = 0$	15	—	—	V
$V_{(\text{BR})\text{EBO}}$	emitter-base breakdown voltage	$I_E = 10 \mu\text{A}; I_C = 0$	2.5	—	—	V
I_{CBO}	collector leakage current	$V_{CB} = 6 \text{ V}; I_E = 0$	—	—	50	nA
h_{FE}	DC current gain	$I_C = 20 \text{ mA}; V_{CE} = 6 \text{ V}; \text{see Fig.3}$	60	120	250	
C_{re}	feedback capacitance	$I_C = 0; V_{CB} = 6 \text{ V}; f = 1 \text{ MHz}; \text{see Fig.4}$	—	0.35	—	pF
f_T	transition frequency	$I_C = 20 \text{ mA}; V_{CE} = 6 \text{ V}; f = 1 \text{ GHz}; T_{\text{amb}} = 25^\circ\text{C}; \text{see Fig.5}$	—	9	—	GHz
G_{UM}	maximum unilateral power gain; note 1	$I_C = 20 \text{ mA}; V_{CE} = 6 \text{ V}; f = 900 \text{ MHz}; T_{\text{amb}} = 25^\circ\text{C}$	—	17	—	dB
		$I_C = 20 \text{ mA}; V_{CE} = 6 \text{ V}; f = 2 \text{ GHz}; T_{\text{amb}} = 25^\circ\text{C}$	—	11	—	dB
$ S_{21} ^2$	insertion power gain	$I_C = 20 \text{ mA}; V_{CE} = 6 \text{ V}; f = 900 \text{ MHz}; T_{\text{amb}} = 25^\circ\text{C}$	16	17	—	dB
F	noise figure	$\Gamma_s = \Gamma_{\text{opt}}; I_C = 5 \text{ mA}; V_{CE} = 6 \text{ V}; f = 900 \text{ MHz}$	—	1.1	1.6	dB
		$\Gamma_s = \Gamma_{\text{opt}}; I_C = 20 \text{ mA}; V_{CE} = 6 \text{ V}; f = 900 \text{ MHz}$	—	1.6	2.1	dB
		$\Gamma_s = \Gamma_{\text{opt}}; I_C = 5 \text{ mA}; V_{CE} = 6 \text{ V}; f = 2 \text{ GHz}$	—	1.85	—	dB
P_{L1}	output power at 1 dB gain compression	$I_C = 20 \text{ mA}; V_{CE} = 6 \text{ V}; f = 900 \text{ MHz}; R_L = 50 \Omega; T_{\text{amb}} = 25^\circ\text{C}$	—	17	—	dBm
ITO	third order intercept point	note 2	—	26	—	dBm
V_o	output voltage	note 3	—	275	—	mV
d_2	second order intermodulation distortion	note 4	—	-50	—	dB

Notes

- G_{UM} is the maximum unilateral power gain, assuming S_{12} is zero. $G_{\text{UM}} = 10 \log \frac{|S_{21}|^2}{(1 - |S_{11}|^2)(1 - |S_{22}|^2)} \text{ dB}$.
- $I_C = 20 \text{ mA}; V_{CE} = 6 \text{ V}; R_L = 50 \Omega; T_{\text{amb}} = 25^\circ\text{C}; f_p = 900 \text{ MHz}; f_q = 902 \text{ MHz}; \text{measured at } 2f_p - f_q = 898 \text{ MHz and } 2f_q - f_p = 904 \text{ MHz.}$
- $d_{\text{im}} = -60 \text{ dB}$ (DIN45004B); $I_C = 20 \text{ mA}; V_{CE} = 6 \text{ V}; V_p = V_o; V_q = V_o - 6 \text{ dB}; V_r = V_o - 6 \text{ dB}; R_L = 75 \Omega; f_p = 795.25 \text{ MHz}; f_q = 803.25 \text{ MHz}; f_r = 805.25 \text{ MHz}; \text{measured at } f_p + f_q - f_r = 793.25 \text{ MHz.}$
- $I_C = 20 \text{ mA}; V_{CE} = 6 \text{ V}; V_o = 75 \text{ mV}; R_L = 75 \Omega; T_{\text{amb}} = 25^\circ\text{C}; f_p = 250 \text{ MHz}; f_q = 560 \text{ MHz}; \text{measured at } f_p + f_q = 810 \text{ MHz.}$

NPN 9 GHz wideband transistors

BFG520W; BFG520W/X

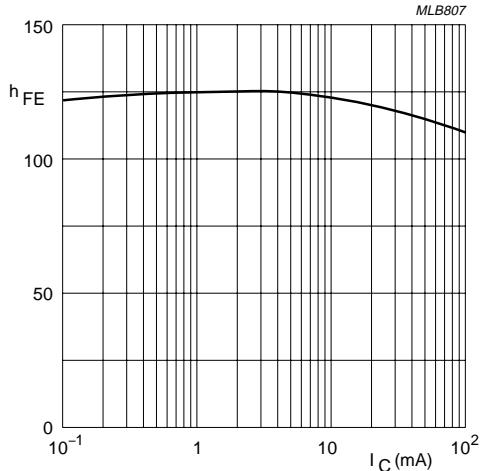
 $V_{CE} = 6\text{ V}.$

Fig.3 DC current gain as a function of collector current; typical values.

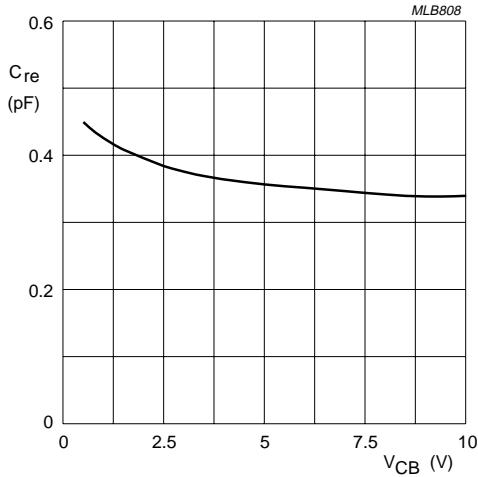
 $I_C = 0; f = 1\text{ MHz}.$

Fig.4 Feedback capacitance as a function of collector-base voltage; typical values.


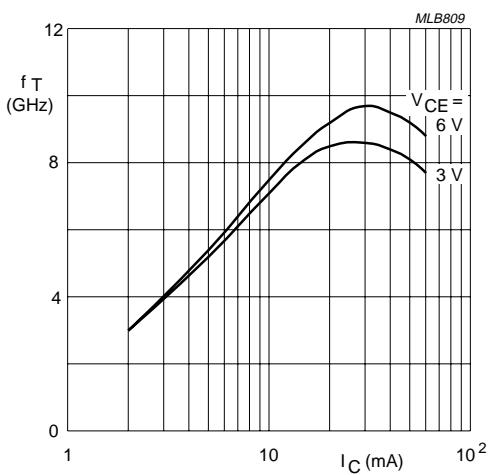
 $f = 1\text{ GHz}; T_{amb} = 25\text{ }^{\circ}\text{C}.$

Fig.5 Transition frequency as a function of collector current; typical values.


NPN 9 GHz wideband transistors

BFG520W; BFG520W/X

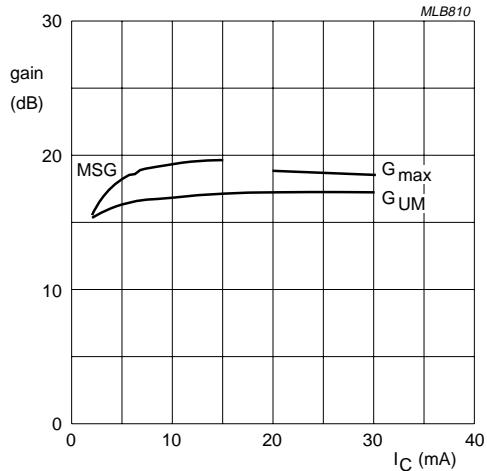


$f = 900 \text{ MHz}; V_{CE} = 6 \text{ V.}$

Fig.6 Gain as a function of collector current;
typical values.

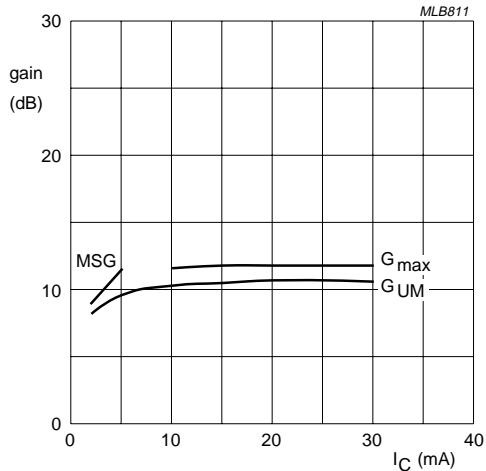


$f = 2 \text{ GHz}; V_{CE} = 6 \text{ V.}$

Fig.7 Gain as a function of collector current;
typical values.

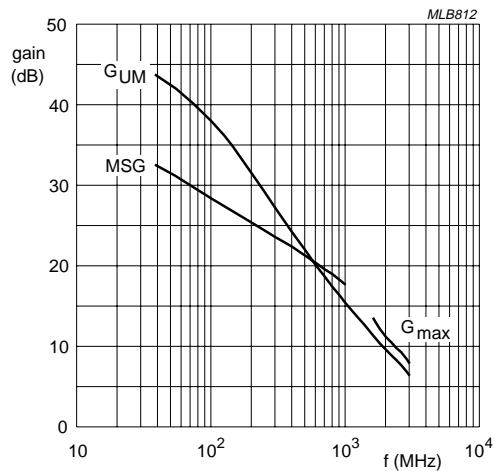

$I_C = 5 \text{ mA}; V_{CE} = 6 \text{ V.}$

Fig.8 Gain as a function of frequency;
typical values.

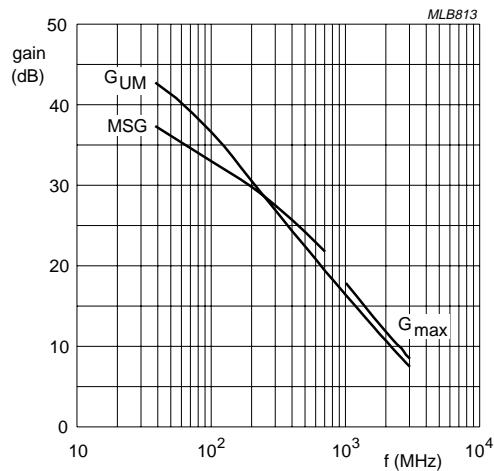


$I_C = 20 \text{ mA}; V_{CE} = 6 \text{ V.}$

Fig.9 Gain as a function of frequency;
typical values.


NPN 9 GHz wideband transistors

BFG520W; BFG520W/X

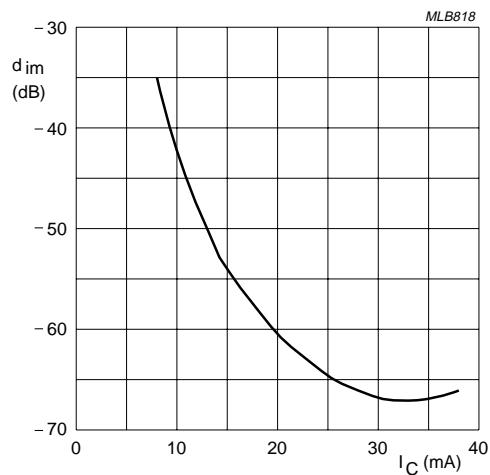


$V_o = 275 \text{ mV}$; $f_p + f_q - f_r = 793.25 \text{ MHz}$; $V_{CE} = 6 \text{ V}$;
 $R_L = 75 \Omega$; $T_{amb} = 25^\circ\text{C}$.

Fig.10 Intermodulation distortion as a function of collector current; typical values.

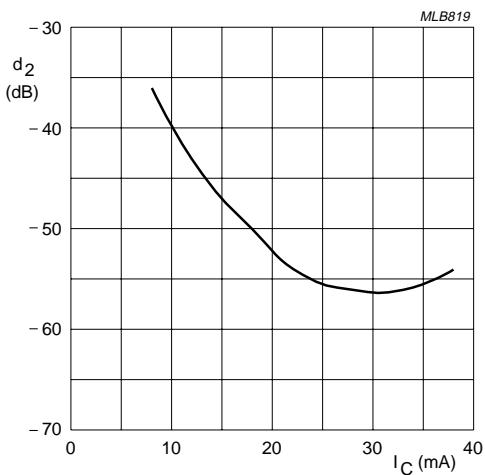


$V_o = 75 \text{ mV}$; $f_p + f_q = 810 \text{ MHz}$; $V_{CE} = 6 \text{ V}$;
 $R_L = 75 \Omega$; $T_{amb} = 25^\circ\text{C}$.

Fig.11 Second order intermodulation distortion as a function of collector current; typical values.

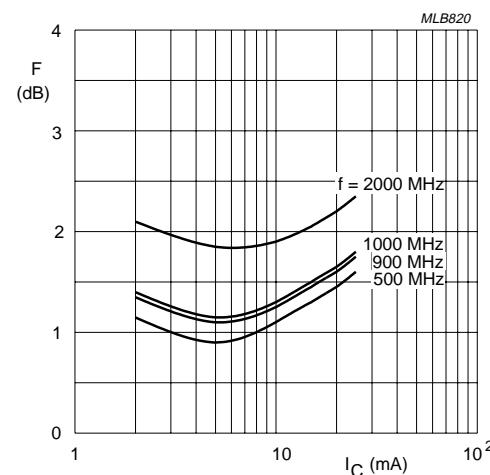

$V_{CE} = 6 \text{ V}$.

Fig.12 Minimum noise figure as a function of collector current; typical values.

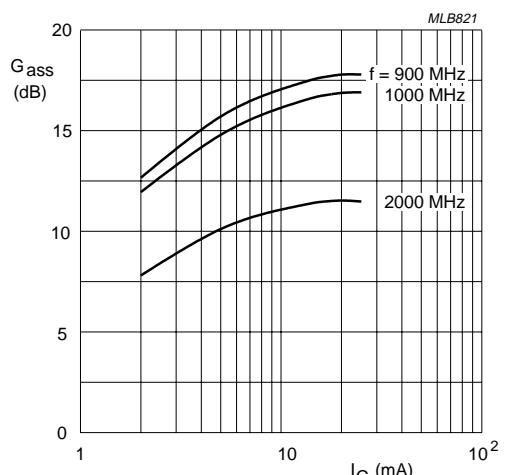

$V_{CE} = 6 \text{ V}$.

Fig.13 Associated available gain as a function of collector current; typical values.

NPN 9 GHz wideband transistors

BFG520W; BFG520W/X

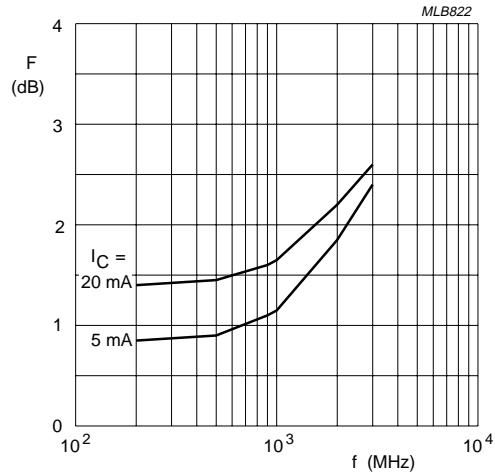
 $V_{CE} = 6$ V.

Fig.14 Minimum noise figure as a function of frequency; typical values.



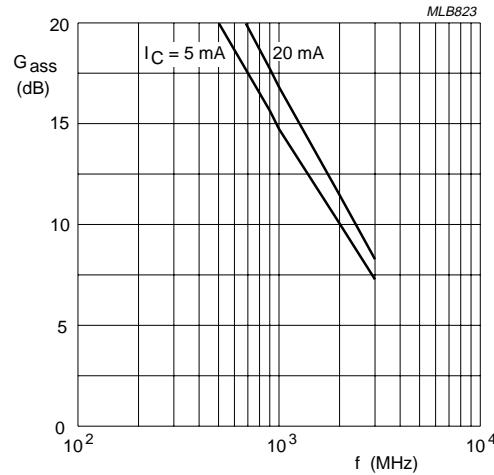
 $V_{CE} = 6$ V.

Fig.15 Associated available gain as a function of frequency; typical values.



NPN 9 GHz wideband transistors

BFG520W; BFG520W/X

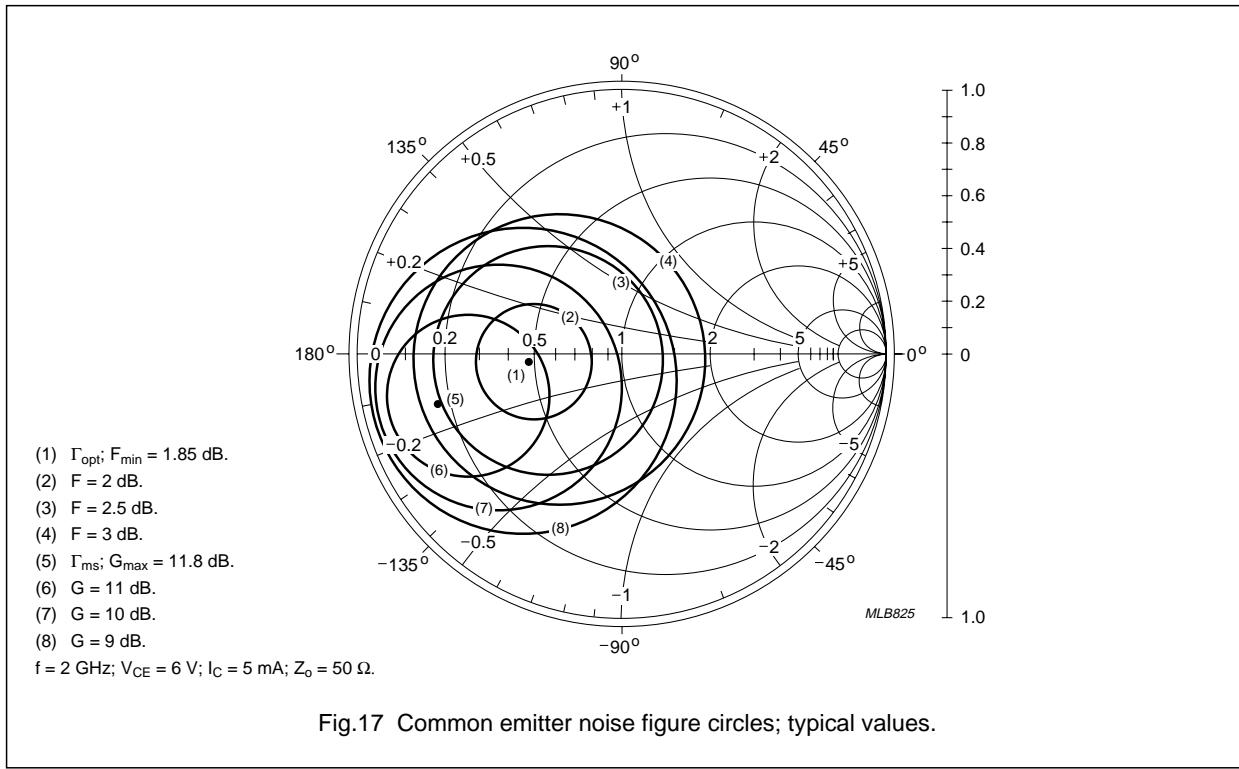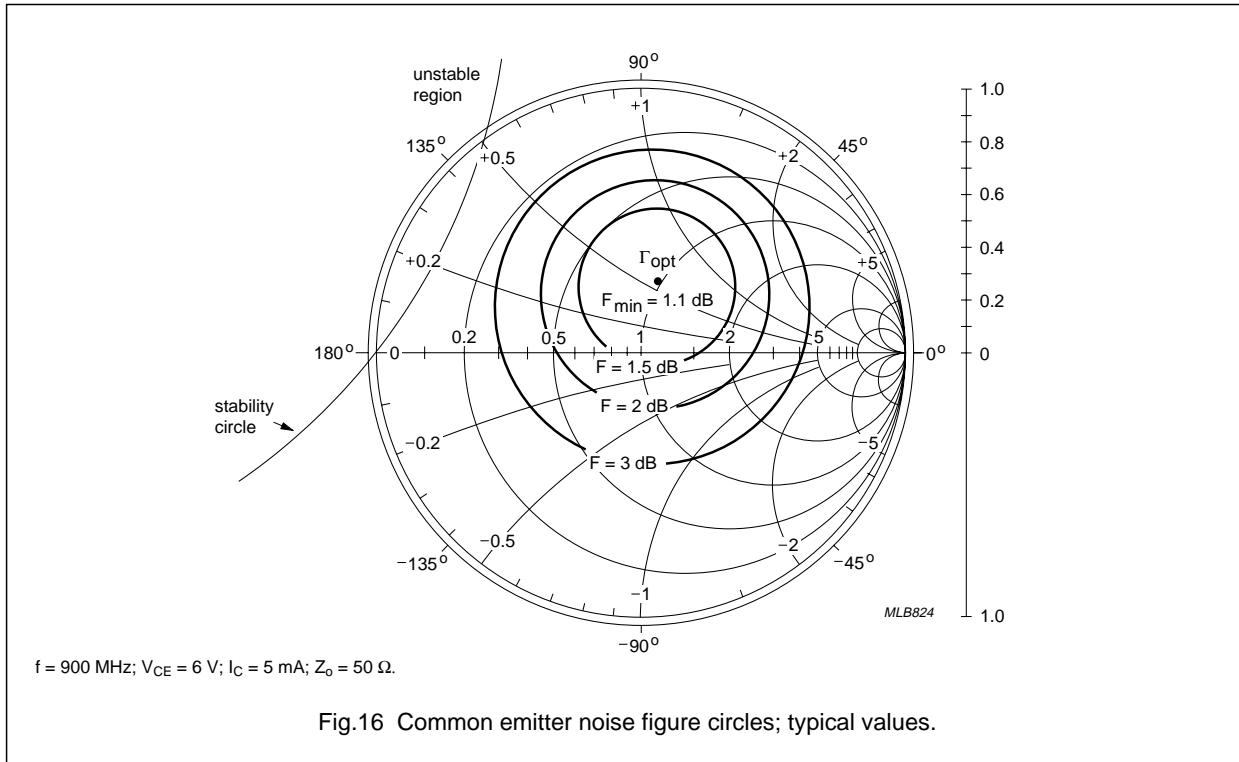



NPN 9 GHz wideband transistors

BFG520W; BFG520W/X

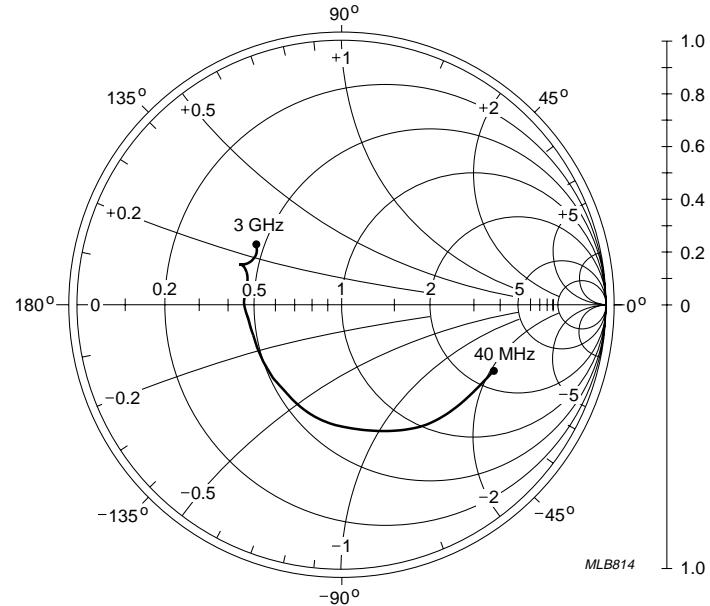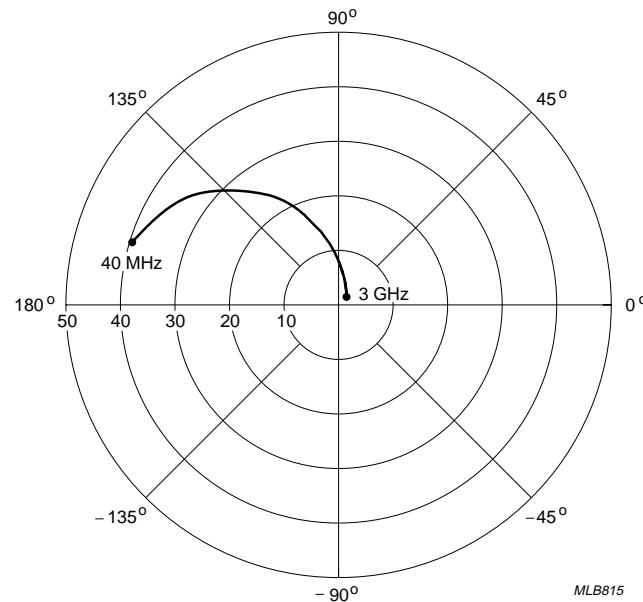 $V_{CE} = 6 \text{ V}; I_C = 20 \text{ mA}; Z_0 = 50 \Omega.$ Fig.18 Common emitter input reflection coefficient (S_{11}); typical values. $V_{CE} = 6 \text{ V}; I_C = 20 \text{ mA}.$ Fig.19 Common emitter forward transmission coefficient (S_{21}); typical values.

NPN 9 GHz wideband transistors

BFG520W; BFG520W/X

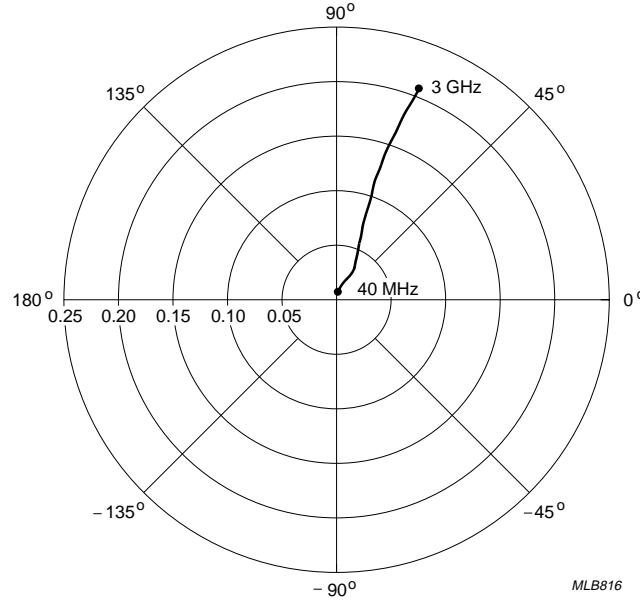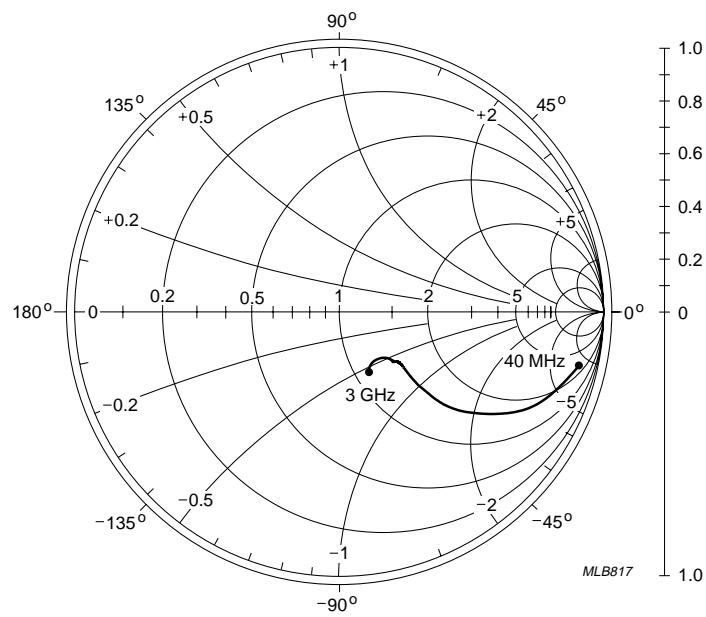 $V_{CE} = 6 \text{ V}; I_C = 20 \text{ mA}.$ Fig.20 Common emitter reverse transmission coefficient (S_{12}); typical values. $V_{CE} = 6 \text{ V}; I_C = 20 \text{ mA}; Z_o = 50 \Omega.$ Fig.21 Common emitter output reflection coefficient (S_{22}); typical values.

NPN 9 GHz wideband transistors

BFG520W; BFG520W/X

SPICE parameters for the BFG520W die

SEQUENCE No.	PARAMETER	VALUE	UNIT
1	IS	1.016	fA
2	BF	220.1	–
3	NF	1.000	–
4	VAF	48.06	V
5	IKF	510	mA
6	ISE	283	fA
7	NE	2.035	–
8	BR	100.7	–
9	NR	0.988	–
10	VAR	1.692	V
11	IKR	2.352	mA
12	ISC	24.48	aA
13	NC	1.022	–
14	RB	10.00	Ω
15	IRB	1.000	μA
16	RBM	10.00	Ω
17	RE	775.3	mΩ
18	RC	2.210	Ω
19 ⁽¹⁾	XTB	0.000	–
20 ⁽¹⁾	EG	1.110	eV
21 ⁽¹⁾	XTI	3.000	–
22	CJE	1.245	pF
23	VJE	600.0	mV
24	MJE	0.258	–
25	TF	8.616	ps
26	XTF	6.788	–
27	VTF	1.414	V
28	ITF	110.3	mA
29	PTF	45.01	deg
30	CJC	447.6	fF
31	VJC	189.2	mV
32	MJC	0.070	–
33	XCJC	0.130	–
34	TR	543.7	ps
35 ⁽¹⁾	CJS	0.000	F

SEQUENCE No.	PARAMETER	VALUE	UNIT
36 ⁽¹⁾	VJS	750.0	mV
37 ⁽¹⁾	MJS	0.000	–
38	FC	0.780	–

Note

1. These parameters have not been extracted, the default values are shown.

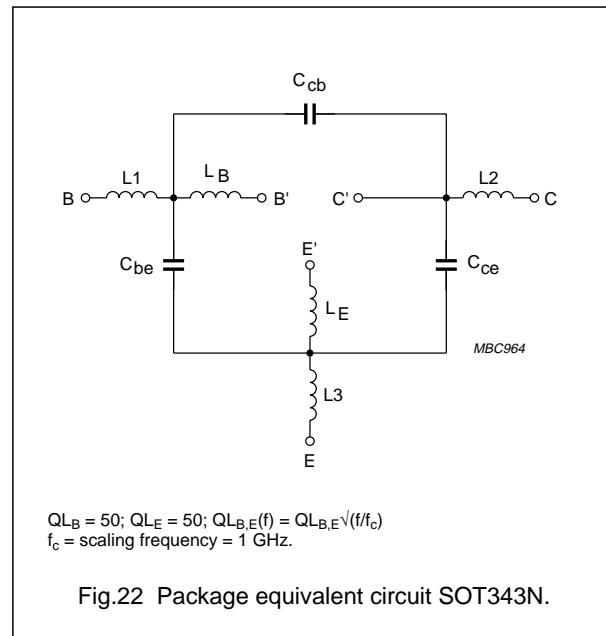


Fig.22 Package equivalent circuit SOT343N.

List of components (see Fig.22)

DESIGNATION	VALUE	UNIT
C _{be}	70	fF
C _{cb}	50	fF
C _{ce}	115	fF
L ₁	0.34	nH
L ₂	0.10	nH
L ₃	0.25	nH
L _B	0.40	nH
L _E	0.40	nH


NPN 9 GHz wideband transistors

BFG520W; BFG520W/X

PACKAGE OUTLINE

Plastic surface mounted package; 4 leads

SOT343N

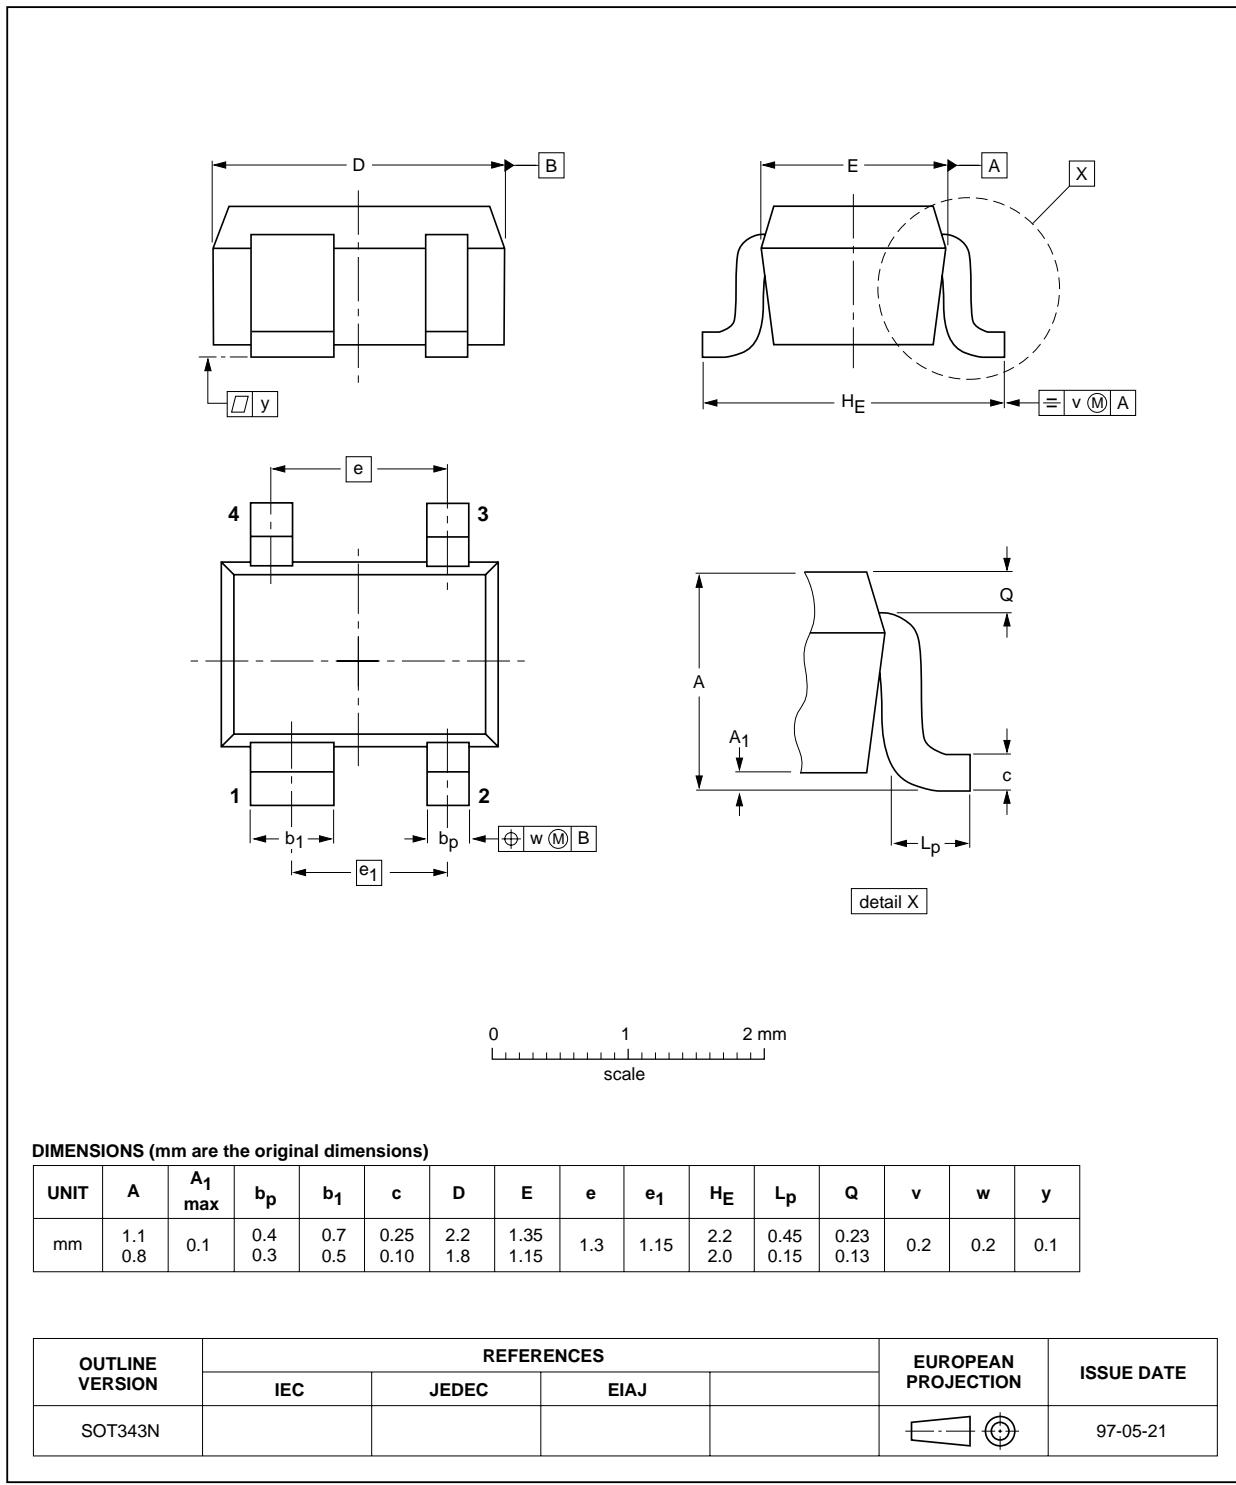

DIMENSIONS (mm are the original dimensions)

UNIT	A	A_1 max	b_p	b_1	c	D	E	e	e_1	H_E	L_p	Q	v	w	y
mm	1.1 0.8	0.1	0.4 0.3	0.7 0.5	0.25 0.10	2.2 1.8	1.35 1.15	1.3	1.15	2.2 2.0	0.45 0.15	0.23 0.13	0.2	0.2	0.1

OUTLINE VERSION	REFERENCES				EUROPEAN PROJECTION	ISSUE DATE
	IEC	JEDEC	EIAJ			
SOT343N						97-05-21

NPN 9 GHz wideband transistors**BFG520W; BFG520W/X****DEFINITIONS**

Data sheet status	
Objective specification	This data sheet contains target or goal specifications for product development.
Preliminary specification	This data sheet contains preliminary data; supplementary data may be published later.
Product specification	This data sheet contains final product specifications.
Limiting values	
Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.	
Application information	
Where application information is given, it is advisory and does not form part of the specification.	

LIFE SUPPORT APPLICATIONS

These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips for any damages resulting from such improper use or sale.

NPN 9 GHz wideband transistors

BFG520W; BFG520W/X

NOTES

Philips Semiconductors – a worldwide company

Argentina: see South America

Australia: 34 Waterloo Road, NORTH RYDE, NSW 2113, Tel. +61 2 9805 4455, Fax. +61 2 9805 4466

Austria: Computerstr. 6, A-1101 WIEN, P.O. Box 213, Tel. +43 160 1010, Fax. +43 160 101 1210

Belarus: Hotel Minsk Business Center, Bld. 3, r. 1211, Volodarski Str. 6, 220050 MINSK, Tel. +375 172 200 733, Fax. +375 172 200 773

Belgium: see The Netherlands

Brazil: see South America

Bulgaria: Philips Bulgaria Ltd., Energoproject, 15th floor, 51 James Bourchier Blvd., 1407 SOFIA, Tel. +359 2 689 211, Fax. +359 2 689 102

Canada: PHILIPS SEMICONDUCTORS/COMPONENTS, Tel. +1 800 234 7381

China/Hong Kong: 501 Hong Kong Industrial Technology Centre, 72 Tat Chee Avenue, Kowloon Tong, HONG KONG, Tel. +852 2319 7888, Fax. +852 2319 7700

Colombia: see South America

Czech Republic: see Austria

Denmark: Prags Boulevard 80, PB 1919, DK-2300 COPENHAGEN S, Tel. +45 32 88 2636, Fax. +45 31 57 0044

Finland: Sinikallontie 3, FIN-02630 ESPOO, Tel. +358 9 615800, Fax. +358 9 61580920

France: 51 Rue Carnot, BP317, 92156 SURESNES Cedex, Tel. +33 1 40 99 6161, Fax. +33 1 40 99 6427

Germany: Hammerbrookstraße 69, D-20097 HAMBURG, Tel. +49 40 23 53 60, Fax. +49 40 23 536 300

Greece: No. 15, 25th March Street, GR 17778 TAVROS/ATHENS, Tel. +30 1 4894 339/239, Fax. +30 1 4814 240

Hungary: see Austria

India: Philips INDIA Ltd, Band Box Building, 2nd floor, 254-D, Dr. Annie Besant Road, Worli, MUMBAI 400 025, Tel. +91 22 493 8541, Fax. +91 22 493 0966

Indonesia: PT Philips Development Corporation, Semiconductors Division, Gedung Philips, Jl. Buncit Raya Kav.99-100, JAKARTA 12510, Tel. +62 21 794 0040 ext. 2501, Fax. +62 21 794 0080

Ireland: Newstead, Clonskeagh, DUBLIN 14, Tel. +353 1 7640 000, Fax. +353 1 7640 200

Israel: RAPAC Electronics, 7 Kehilat Saloniki St, PO Box 18053, TEL AVIV 61180, Tel. +972 3 645 0444, Fax. +972 3 649 1007

Italy: PHILIPS SEMICONDUCTORS, Piazza IV Novembre 3, 20124 MILANO, Tel. +39 2 6752 2531, Fax. +39 2 6752 2557

Japan: Philips Bldg 13-37, Kohnan 2-chome, Minato-ku, TOKYO 108-8507, Tel. +81 3 3740 5130, Fax. +81 3 3740 5077

Korea: Philips House, 260-199 Itaewon-dong, Yongsan-ku, SEOUL, Tel. +82 2 709 1412, Fax. +82 2 709 1415

Malaysia: No. 76 Jalan Universiti, 46200 PETALING JAYA, SELANGOR, Tel. +60 3 750 5214, Fax. +60 3 757 4880

Mexico: 5900 Gateway East, Suite 200, EL PASO, TEXAS 79905, Tel. +9-5 800 234 7381

Middle East: see Italy

Netherlands: Postbus 90050, 5600 PB EINDHOVEN, Bldg. VB, Tel. +31 40 27 82785, Fax. +31 40 27 88399

New Zealand: 2 Wagener Place, C.P.O. Box 1041, AUCKLAND, Tel. +64 9 849 4160, Fax. +64 9 849 7811

Norway: Box 1, Manglerud 0612, OSLO, Tel. +47 22 74 8000, Fax. +47 22 74 8341

Pakistan: see Singapore

Philippines: Philips Semiconductors Philippines Inc., 106 Valero St. Salcedo Village, P.O. Box 2108 MCC, MAKATI, Metro MANILA, Tel. +63 2 816 6380, Fax. +63 2 817 3474

Poland: Ul. Lukiska 10, PL 04-123 WARSZAWA, Tel. +48 22 612 2831, Fax. +48 22 612 2327

Portugal: see Spain

Romania: see Italy

Russia: Philips Russia, Ul. Usatcheva 35A, 119048 MOSCOW, Tel. +7 095 755 6918, Fax. +7 095 755 6919

Singapore: Lorong 1, Toa Payoh, SINGAPORE 319762, Tel. +65 350 2538, Fax. +65 251 6500

Slovakia: see Austria

Slovenia: see Italy

South Africa: S.A. PHILIPS Pty Ltd., 195-215 Main Road Martindale, 2092 JOHANNESBURG, P.O. Box 7430 Johannesburg 2000, Tel. +27 11 470 5911, Fax. +27 11 470 5494

South America: Al. Vicente Pinzon, 173, 6th floor, 04547-130 SÃO PAULO, SP, Brazil, Tel. +55 11 821 2333, Fax. +55 11 821 2382

Spain: Balmes 22, 08007 BARCELONA, Tel. +34 93 301 6312, Fax. +34 93 301 4107

Sweden: Kottbygatan 7, Akalla, S-16485 STOCKHOLM, Tel. +46 8 5985 2000, Fax. +46 8 5985 2745

Switzerland: Allmendstrasse 140, CH-8027 ZÜRICH, Tel. +41 1 488 2741 Fax. +41 1 488 3263

Taiwan: Philips Semiconductors, 6F, No. 96, Chien Kuo N. Rd., Sec. 1, TAIPEI, Taiwan Tel. +886 2 2134 2865, Fax. +886 2 2134 2874

Thailand: PHILIPS ELECTRONICS (THAILAND) Ltd., 209/2 Sanpavuth-Bangna Road Prakanong, BANGKOK 10260, Tel. +66 2 745 4090, Fax. +66 2 398 0793

Turkey: Talatpasa Cad. No. 5, 80640 GÜLTEPE/İSTANBUL, Tel. +90 212 279 2770, Fax. +90 212 282 6707

Ukraine: PHILIPS UKRAINE, 4 Patrice Lumumba str., Building B, Floor 7, 252042 KIEV, Tel. +380 44 264 2776, Fax. +380 44 268 0461

United Kingdom: Philips Semiconductors Ltd., 276 Bath Road, Hayes, MIDDLESEX UB3 5BX, Tel. +44 181 730 5000, Fax. +44 181 754 8421

United States: 811 East Arques Avenue, SUNNYVALE, CA 94088-3409, Tel. +1 800 234 7381

Uruguay: see South America

Vietnam: see Singapore

Yugoslavia: PHILIPS, Trg N. Pasica 5/v, 11000 BEOGRAD, Tel. +381 11 625 344, Fax.+381 11 635 777

For all other countries apply to: Philips Semiconductors, International Marketing & Sales Communications, Building BE-p, P.O. Box 218, 5600 MD EINDHOVEN, The Netherlands, Fax. +31 40 27 24825

Internet: <http://www.semiconductors.philips.com>

© Philips Electronics N.V. 1998

SCA60

All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.

The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Printed in The Netherlands

125104/00/03/pp16

Date of release: 1998 Oct 02

Document order number: 9397 750 04464

Let's make things better.

Philips
Semiconductors



PHILIPS