



Endicott Research Group, Inc.

2601 Wayne St., Endicott, NY 13760
607-754-9187 Fax 607-754-9255
http://www.ergpower.com

SFR3656HF



Specifications and Applications Information


04/27/10

The ERG *Smart Force Series* of LED backlight units are specifically designed for applications which require wide dimming and LCD brightness stability. The SFR3656HF is designed to provide backlighting for the Sharp LQ104S1DG51 display.


Designed, manufactured and supported within the USA, the SFR features:

- ✓ Custom rails for specific LCDs
- ✓ High dimming ratio
- ✓ One year warranty

Smart Force LED Backlight Unit

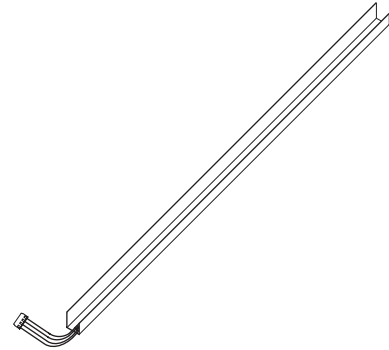

Package Configuration

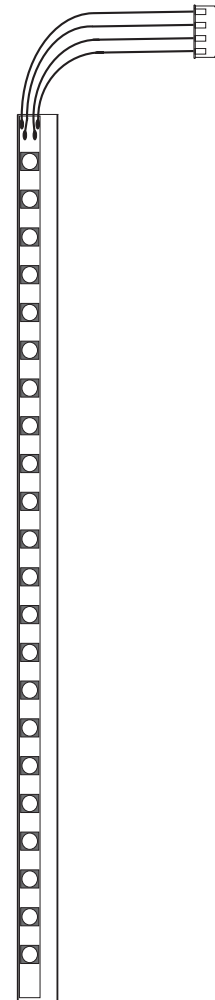


Components are shown for reference only. Actual product may differ from that shown.

Connector Input Connector

Molex
51021-0400

- J1-1 Cathode 1
- J1-2 Anode 1
- J1-3 Cathode 2
- J1-4 Anode 2



**Absolute Maximum Ratings** ⁽¹⁾

Rating	Symbol	Value	Units
Forward Current ⁽²⁾	I_F	500	mA
Pulse Forward Current ^{(2) (3)}	I_P	800	mA
Component Surface Temperature	T_s	-40 to +110	°C
Storage Temperature	T_{stg}	-40 to +100	°C

Maximum Recommended Operating Conditions

Rating	Symbol	Value	Units
Forward Current ^{(4) (5)}	I_F	200	mA
Pulse Forward Current	I_P	400	mA
Component Surface ⁽⁵⁾ Temperature	T_s	-40 to +110	°C

Electrical CharacteristicsUnless otherwise noted $V_{in} = 48.00$ Volts dc and $T_a = 25^\circ\text{C}$

Characteristic	Symbol	Min	Typ	Max	Units
Number of Strings	-	-	2	-	-
LED Forward Voltage	V_F	-	3.2	3.5	V
String voltage	V_S	-	35.2	38.5	V

Specifications subject to change without notice.

- (1) Operation above maximum recommended operating conditions will require additional thermal management actions and will decrease LED lifetime.
- (2) Current is specified per string.
- (3) Maximum duty cycle is 50% for pulsed current drive at 400mA, pulse width ≤ 10 ms.
- (4) Strings are to be driven with a current source.
- (5) Operation at or below the maximum recommended component surface temperature and forward current rating allows presumption of a 50,000 hour LED lifetime. (Lifetime is time to 70% Lumen maintenance).




Backlight Chromaticity Coordinate Boundaries ⁽¹⁾

(Ta = 25°C)

	A	B	C	D
X	0.296	0.288	0.309	0.316
Y	0.276	0.315	0.340	0.304

(1) Each column (A, B, C and D) represents an X,Y coordinate on the CIE 1931 chromaticity diagram.

CIE 1931 CHROMATICITY DIAGRAM

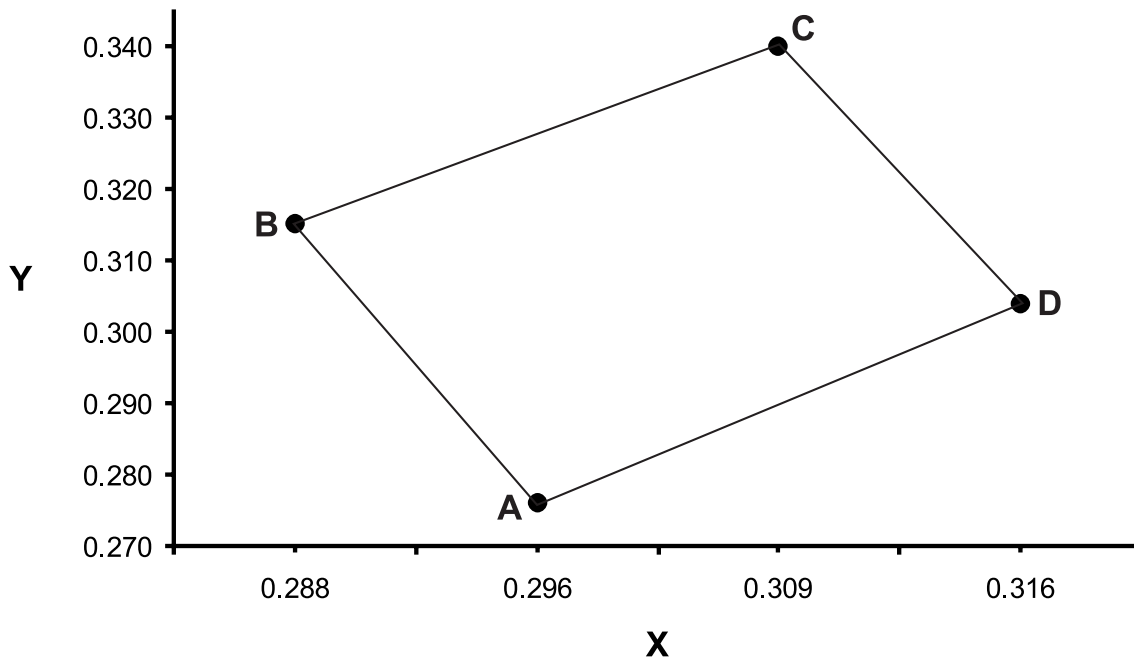

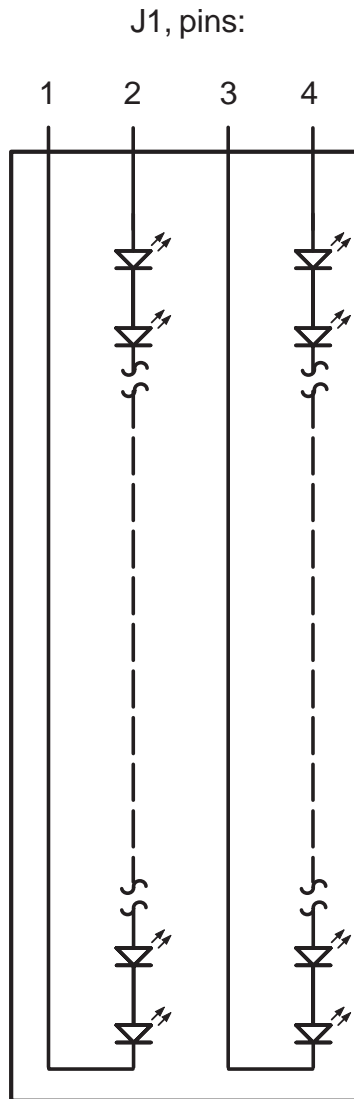


Figure 1
SFR Connectivity



Endicott Research Group, Inc. (ERG) reserves the right to make changes in circuit design and/or specifications at any time without notice. Accordingly, the reader is cautioned to verify that data sheets are current before placing orders. Information furnished by ERG is believed to be accurate and reliable. However, no responsibility is assumed by ERG for its use.