

AC Input Phototransistor Small Outline Surface Mount Optocoupler

The MOC256 is an AC input phototransistor optocoupler. The device consists of two infrared emitters connected in anti-parallel and coupled to a silicon NPN phototransistor detector. They are designed for applications requiring the detection or monitoring of AC signals. These devices are constructed with a standard SOIC-8 footprint.

- Guaranteed Current Transfer Ratio CTR of 20% at $I_F=10$ mA
- UL Recognized. File Number E54915
- Industry Standard SOIC-8 Surface Mountable Package
- Standard Lead Spacing of 0.050 inches
- Available in Tape and Reel Option (Conforms to EIA Standard RS481A)
- Bidirectional AC Input (Protection Against Reversed DC Bias)
- Guaranteed CTR Symmetry of 2:1 Maximum
- High Input-Output Isolation of 3000 Vac (rms) Guaranteed

MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Rating	Symbol	Value	Unit
--------	--------	-------	------

INPUT LED

Forward Current — Continuous	I_F	60	mA
Forward Current — Peak (PW = 100 μs , 120 pps)	$I_F(\text{pk})$	1	A
Reverse Voltage	V_R	6	V
LED Power Dissipation @ $T_A = 25^\circ\text{C}$ Derate above 25°C	P_D	90 0.8	mW mW/ $^\circ\text{C}$

OUTPUT TRANSISTOR

Collector-Emitter Voltage	V_{CEO}	30	V
Emitter-Base Voltage	V_{ECO}	7	V
Collector Current — Continuous	I_C	150	mA
Detector Power Dissipation @ $T_A = 25^\circ\text{C}$ Derate above 25°C	P_D	150 1.76	mW mW/ $^\circ\text{C}$

TOTAL DEVICE

Input-Output Isolation Voltage ⁽¹⁾ (60 Hz, 1 sec Duration)	V_{ISO}	3000	Vac(rms)
Total Device Power Dissipation @ $T_A = 25^\circ\text{C}$ Derate above 25°C	P_D	250 2.94	mW mW/ $^\circ\text{C}$
Ambient Operating Temperature Range ⁽²⁾	T_A	-55 to +100	$^\circ\text{C}$
Storage Temperature Range ⁽²⁾	T_{stg}	-55 to +150	$^\circ\text{C}$
Lead Soldering Temperature (10 sec, 1/16" from case)	—	260	$^\circ\text{C}$

1. Input-output isolation voltage is an internal device dielectric breakdown rating. For this test, Pins 1 and 2 are common, and Pins 5, 6 and 7 are common.
2. Refer to Quality and Reliability Section in Opto Data Book for information on test conditions.

NOTE: Thickness through insulation between input and output is ≥ 0.5 mm.

Preferred devices are Motorola recommended choices for future use and best overall value.


REV 1

© Motorola, Inc. 1995

MOC256


Motorola Preferred Device

**SMALL OUTLINE
OPTOISOLATORS
AC INPUT
TRANSISTOR OUTPUT**



**CASE 846-01, STYLE 2
PLASTIC**

SCHEMATIC



- PIN 1. AC IN
2. AC IN
3. N.C.
4. N.C.
5. EMITTER
6. COLLECTOR
7. BASE
8. N.C.

MOC256

ELECTRICAL CHARACTERISTICS (T_A = 25°C unless otherwise noted)⁽¹⁾

Characteristic	Symbol	Min	Typ ⁽¹⁾	Max	Unit
INPUT LED					
Forward Voltage (I _F = 10 mA, either direction)	V _F	—	1.15	1.5	Volts
Capacitance (V = 0 V, f = 1 MHz)	C _J	—	20	—	pF
OUTPUT TRANSISTOR					
Collector–Emitter Dark Current (V _{CE} = 10 V) T _A = 100°C	I _{CEO}	—	1	100	nA μA
Collector–Base Dark Current (V _{CB} = 10 V)	I _{CBO}	—	0.2	—	nA
Collector–Emitter Breakdown Voltage (I _C = 10 mA)	V _{(BR)CEO}	30	45	—	Volts
Collector–Base Breakdown Voltage (I _C = 100 μA)	V _{(BR)CBO}	70	100	—	Volts
Emitter–Collector Breakdown Voltage (I _E = 100 μA)	V _{(BR)ECO}	5	7.8	—	Volts
DC Current Gain (I _C = 2 mA, V _{CE} = 5 V)	h _{FE}	—	500	—	—
Collector–Emitter Capacitance (f = 1 MHz, V _{CE} = 0 V)	C _{CE}	—	7	—	pF
Collector–Base Capacitance (f = 1 MHz, V _{CB} = 0 V)	C _{CB}	—	20	—	pF
Emitter–Base Capacitance (f = 1 MHz, V _{EB} = 0 V)	C _{EB}	—	10	—	pF
COUPLED					
Output Collector Current (I _F = ± 10 mA, V _{CE} = 10 V)	I _C (CTR) ⁽⁵⁾	2 (20)	15 (150)	—	mA (%)
Output Collector Current Symmetry ⁽³⁾ $\left(\frac{I_C \text{ at } I_F = +10 \text{ mA, } V_{CE} = 10 \text{ V}}{I_C \text{ at } I_F = -10 \text{ mA, } V_{CE} = 10 \text{ V}} \right)$	—	0.5	1.0	2.0	—
Collector–Emitter Saturation Voltage (I _C = 0.5 mA, I _F = ± 10 mA)	V _{CE(sat)}	—	0.1	0.4	Volts
Input–Output Isolation Voltage (f = 60 Hz, t = 1 sec) ^(4,5)	V _{ISO}	3000	—	—	Vac(rms)
Isolation Resistance (V = 500 V) ⁽⁵⁾	R _{ISO}	10 ¹¹	—	—	Ω
Isolation Capacitance (V = 0 V, f = 1 MHz) ⁽⁵⁾	C _{ISO}	—	0.2	—	pF

1. Always design to the specified minimum/maximum electrical limits (where applicable).
2. Current Transfer Ratio (CTR) = I_C/I_F × 100%.
3. This specification guarantees that the higher of the two I_C readings will be no more than 3 times the lower at I_F = 10 mA.
4. Input–Output Isolation Voltage, V_{ISO}, is an internal device dielectric breakdown rating.
5. For this test, pins 1 and 2 are common, and pins 5, 6 and 7 are common.

TYPICAL CHARACTERISTICS

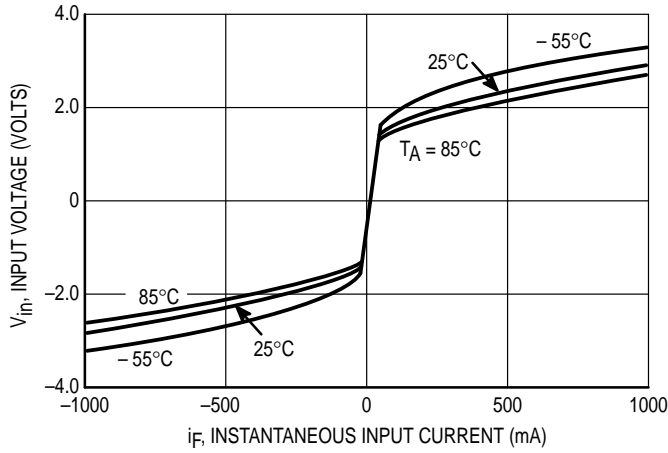


Figure 1. Input Voltage versus Input Current

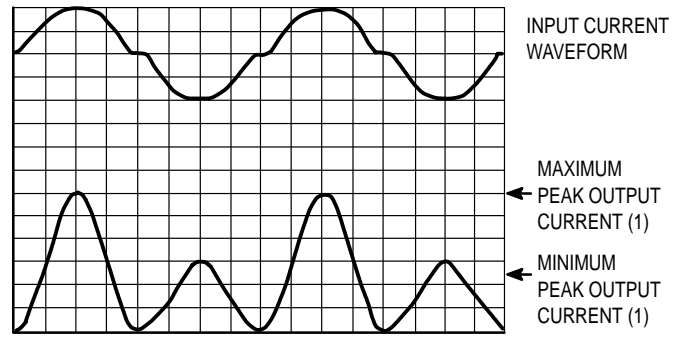


Figure 2. Output Characteristics

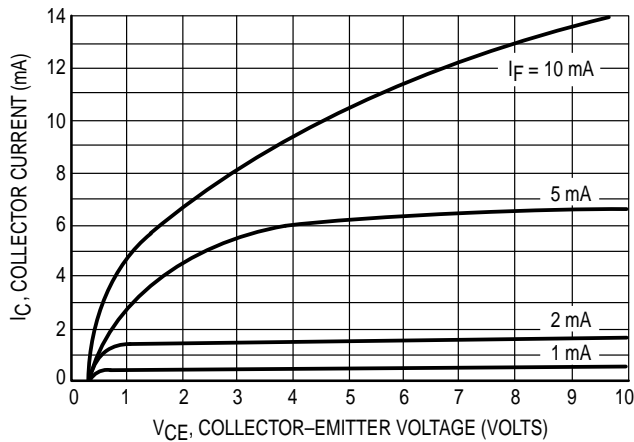


Figure 3. Collector Current versus Collector-Emitter Voltage

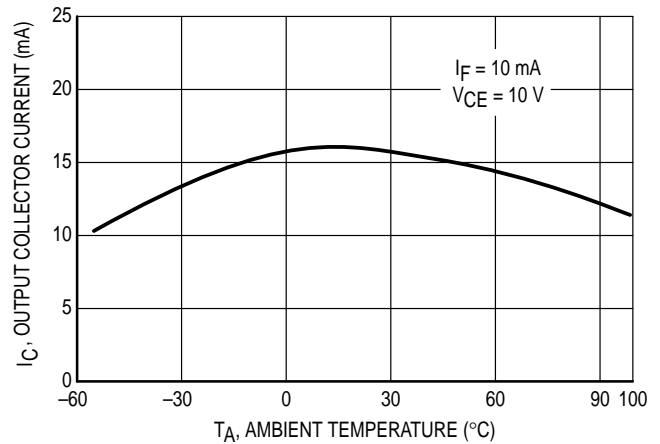


Figure 4. Output Current versus Ambient Temperature

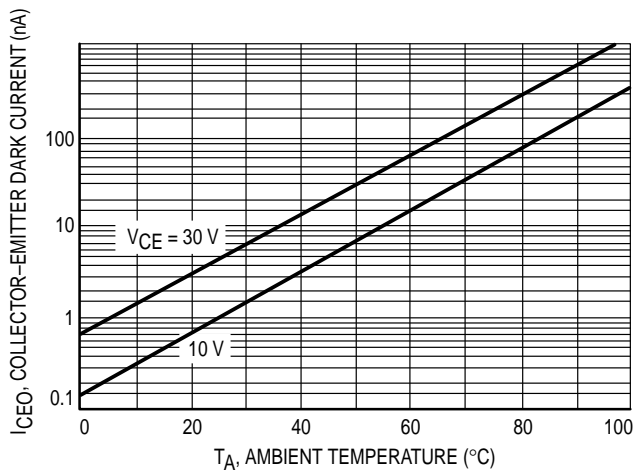


Figure 5. Dark Current versus Ambient Temperature


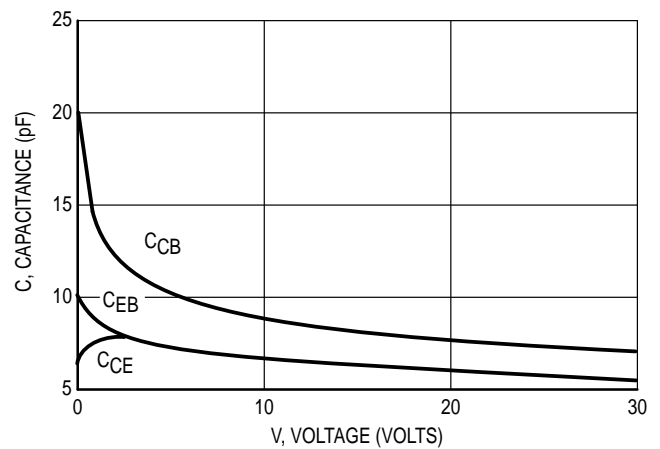


Figure 6. Capacitances versus Voltage

PACKAGE DIMENSIONS

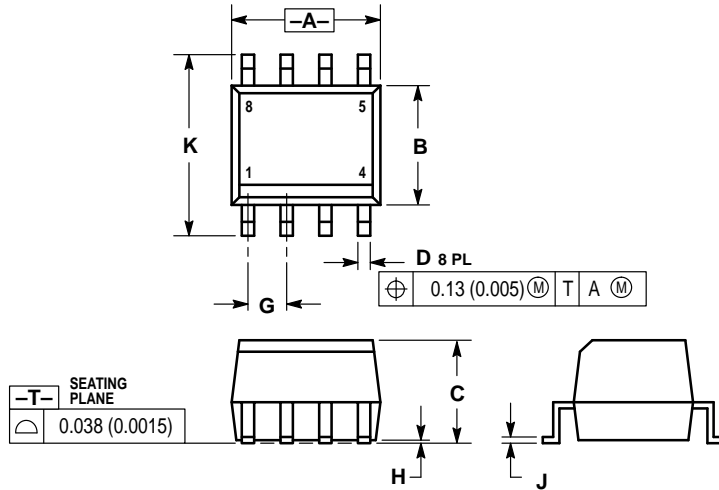

NOTES:
 1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 2. CONTROLLING DIMENSION: INCH.

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.182	0.202	4.63	5.13
B	0.144	0.164	3.66	4.16
C	0.123	0.143	3.13	3.63
D	0.011	0.021	0.28	0.53
G	0.050 BSC		1.27 BSC	
H	0.003	0.008	0.08	0.20
J	0.006	0.010	0.16	0.25
K	0.224	0.244	5.69	6.19

STYLE 2:
 PIN 1. INPUT
 2. INPUT
 3. NC
 4. NC
 5. EMITTER
 6. COLLECTOR
 7. BASE
 8. NC

CASE 846-01
 ISSUE B

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters can and do vary in different applications. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

How to reach us:

USA / EUROPE: Motorola Literature Distribution;
 P.O. Box 20912; Phoenix, Arizona 85036. 1-800-441-2447

JAPAN: Nippon Motorola Ltd.; Tatsumi-SPD-JLDC, Toshikatsu Otsuki,
 6F Seibu-Butsuryu-Center, 3-14-2 Tatsumi Koto-Ku, Tokyo 135, Japan. 03-3521-8315

MFAX: RMFAX0@email.sps.mot.com - TOUCHTONE (602) 244-6609
 INTERNET: http://Design-NET.com

HONG KONG: Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park,
 51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852-26629298

