
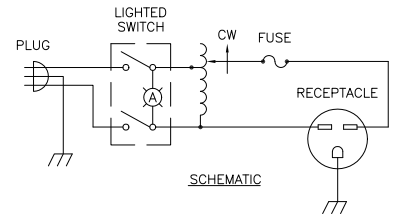


REV.	DATE	BY	APP.
D	031-3945		
REVISED			
REV.	DATE	BY	APP.
A	2/28/00		
ROTATED RECEPTACLE			
B	3/13/01		
REVISED SILKSCREEN			

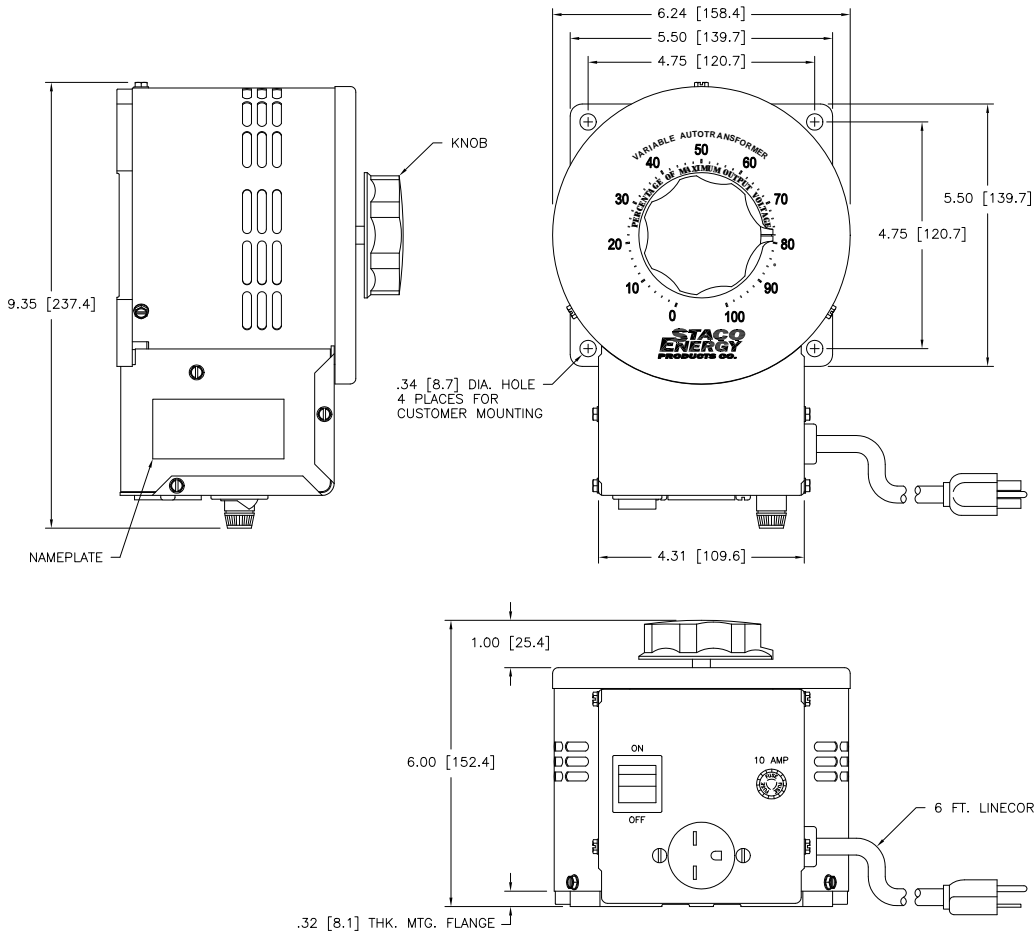

SPECIFICATIONS					
WIRING	INPUT		OUTPUT		
	VOLTS	HERTZ	VOLTS	CONSTANT CURRENT LOAD	
SINGLE PHASE	240	50/60	0-280	MAX. AMPS	MAX. KVA
				9.5	2.66

UNLESS OTHERWISE SPECIFIED, TOLERANCE IS: DIMENSIONS: FRACTIONS DECIMALS ANGLES FRACTIONS DECIMALS ANGLES FRACTIONS DECIMALS ANGLES		MATERIALS: ALL DIMENSIONS TO CENTER UNLESS OTHERWISE SPECIFIED		STAG STAGO ENERGY PRODUCTS CO. 1000 W. 1000 S. 1000 W. 1000 S.	
THE INFORMATION AND DATA SHOWN HEREIN ARE THE PROPERTY OF STAGO ENERGY PRODUCTS CO. AND ARE NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN PERMISSION OF STAGO ENERGY PRODUCTS CO.		DRAWN BY: S.A. SMITH		DATE: 5/17/96	
CHECKED BY: _____		DATE: _____		APP. USED ON: 3PN1520B	
DESIGNED BY: _____		DATE: _____		Dwg. NO: 22	
_____		_____		DATE: 5/30/96	
_____		_____		SCALE: 1=1	
_____		_____		SHEET 1 OF 1	
_____		_____		REV. NO. D	
_____		_____		031-3945	