


DO NOT S

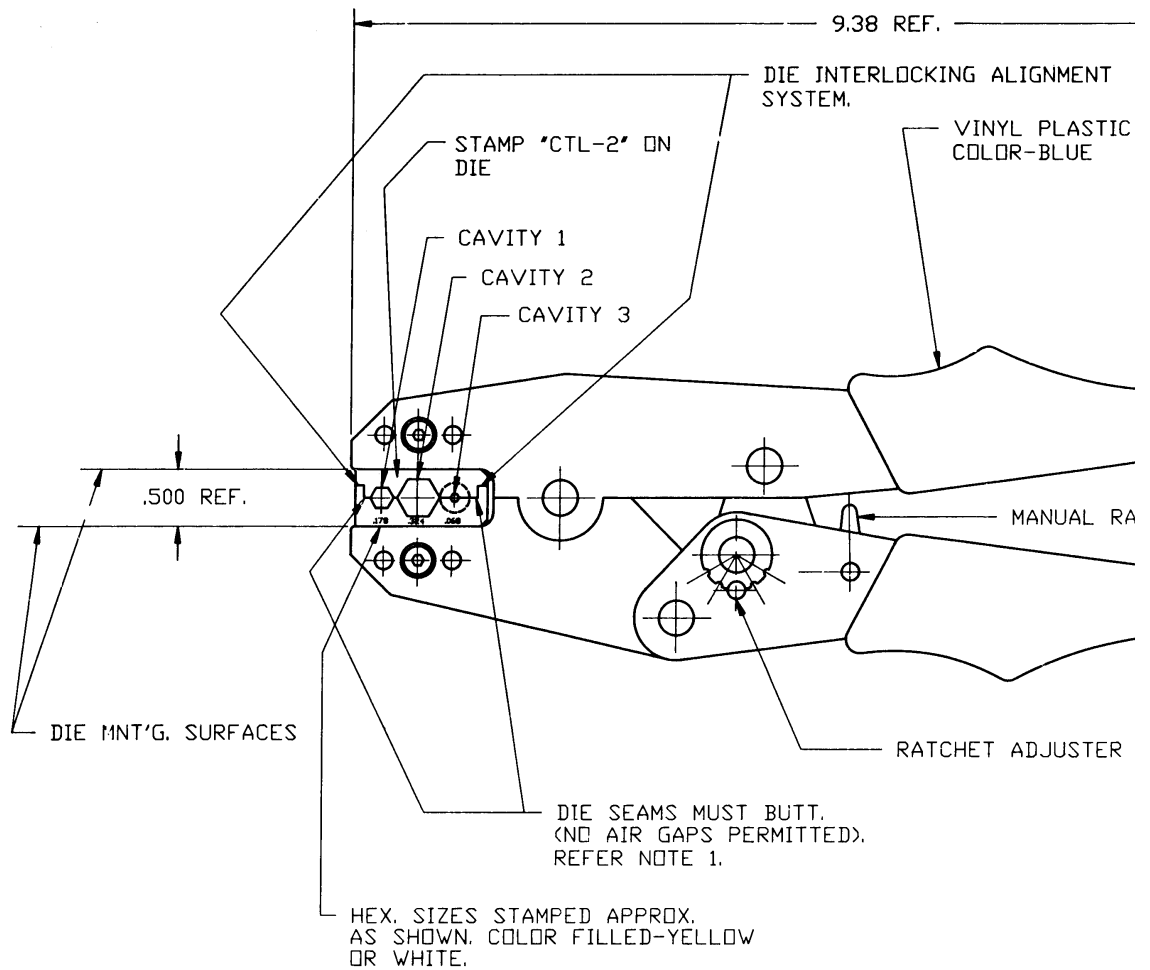

CAVITY NO.	DIM. ACROSS HEX FLATS	GROOVE ACCOMMODATIONS
1	.178 +/--.003	RG174 (3 PC)
2	.324 +/--.003	RG6 (3 PC 179 BELDEN 8281), RG58, RG59, RG62 & PLENUM 58, 59, 62(2 PC).
3	.068 +/--.003	CENTER CONTACT

REF. CAD FILE: H:\DEPT611\TOOLS\CTL

REMOVE ALL BURRS BREAK CORNERS AND SHARP EDGES D05 MAXIMUM UNLESS OTHERWISE SPECIFIED

NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp (2) must be returned upon request, and (3) are confidential and are not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or by any other person to anyone for any purpose is not to be regarded by implication or otherwise as in any manner licensing, granting rights or permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications or other data.

NEXT ASSY	USED ON	UNLESS OTHERWISE SPEC ARE IN INCHES. TOLERA SPECIFIED ARE:
MATERIAL AS PURCHASED		2 PLACE DECIMAL 1.015 (0.381 mm)
SPECIFICATION		3 PL DEC x.1 (0.12)
FINISH AS PURCHASED		REFERENCE D
		REF. EAR# 9

Design Products Co. Inc. Copyright #1102

DO NOT SCALE THIS DRAWING

REVISIONS

SYM	DESCRIPTION	DATE	E.C.O. NO.	APPR.
A	OFFICIAL ENG. RELEASE TO MFG.	6/20/90	37332	JM/I
B	REDRAWN & REVISED- ADDED TOOL SET'G. REQ'TS.- NOTE 1 + O.A. DIMS.	10-2-90	37585	MAV DR
C	ADDED NOTE 2	5/3/91	38063	DR

JG ALIGNMENT

VINYL PLASTIC HANDLES
COLOR-BLUE

APPLIED HAND
FORCE

1.0/1.5

STAMP "AMPHENOL®" ON HANDLE

MANUAL RATCHET RELEASE

2.50 REF.

HET ADJUSTER WHEEL.

CTL-2

DRAWING NUMBER ISSUE

C

NOTES:

1. INITIAL TOOL SETTING REQUIRMENTS:

WITH DIES FIRMLY AFFIXED IN TOOL ON THE DIE MNT'G. SURFACES, CLOSE THE TOOL FULLY (UNTIL THE RATCHET RELEASES) WITH 25-35 LBS. HAND FORCE. THE DIES MUST BE 'BUTTED' (TOUCHING BOTH FRONT & REAR SURFACES). THE RATCHET ADJUSTER WHEEL SHOULD BE POSITIONED IN THE CENTER INDENT (+/- ONE INDENT POSITION).

2. NOTE: LABEL 999-307 MUST BE AFFIXED TO TOOL CONTAINER BOX.

RG58,
32(2 PC).

RFX PROGRAM

T611\TOOLS\CTL-2

PART NO.	QUAN	UOM	REV NO	DESCRIPTION	CODE	FINISH
----------	------	-----	--------	-------------	------	--------

LIST OF MATERIAL

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES NOT OTHERWISE SPECIFIED ARE: 2 PLACE DECIMAL ±.015 (0.381 mm) 3 PLACE DECIMAL ±.005 (0.127 mm) ANGLES ± 1°	DRAWN BY J. MULVEY	DATE 6-13-90	TITLE QUICK CRIMP TOOL FOR BNC & TNC CRIMP PLUGS- 2 & 3 PC. TYPES	Amphenol Corporation RF/Microwave Operations Danbury, Conn. U.S.A.			
	CHECKED D. ROYCE	DATE 6-15-90					
	ENGINEER D. ROYCE	DATE 6-15-90					
	QUALITY ASSURANCE W. JOHNSTON	DATE 6-19-90					
REFERENCE DRAWING NO. REF. EAR# 961726-1	MFG. ENG. H. FREDLUND	DATE 6-19-90	CODE IDENTIFICATION 74868	DRAWING SIZE C	DRAWING NO. CTL-2	SCALE 1=1 SHEET OF	ISSUE C