



SAW Components

Data Sheet B7638





SAW Components

B7638

Low-Loss Filter for Mobile Communication

836,5 / 881,5 MHz




Data Sheet



Chip Sized SAW Package QCS9D

Features

- Low-loss duplexer for cellular band mobile telephone systems
- 50 Ω ports by integrated matching network
- Package for **Surface Mounted Technology (SMT)**
- Small size and low height
- RoHS compliant

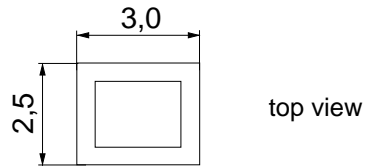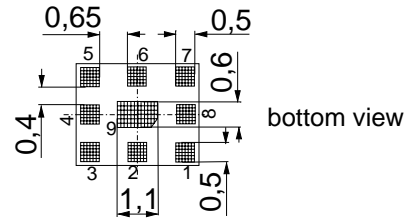


Dimensions in mm, approx. weight 0,035 g

Terminals

Ni, gold-plated

Pin configuration

- 3 TX Input
- 1 RX Output
- 6 Antenna
- 2, 4, 5 Ground
- 7, 8, 9 Ground



Type	Ordering code	Marking and Package according to	Packing according to
B7638	B39881-B7638-L710	C61157-A3-A12	F61074-V8211-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	- 30/+ 85	°C	machine model, 10 pulses source and load impedance 50 Ω } continuous wave T=55°C, 50.000 h
Storage temperature range	T_{stg}	- 40/+ 85	°C	
DC voltage	V_{DC}	5	V	
ESD voltage	V_{ESD}	100 ¹⁾	V	
Input power max.	P_{IN}			
		824,0 ... 849,0 MHz	30	dBm
		869,0 ... 894,0 MHz	22	dBm
		elsewhere	10	dBm

1) -acc. toJESD22-115A (Machine Model), 10 negatie & 10 positive pulses



SAW Components

B7638

Low-Loss Filter for Mobile Communication

836,5 / 881,5 MHz

Data Sheet



Characteristics

Operating temperature range $T = 25 \pm 2^\circ\text{C}$

Terminating impedance $Z_{\text{ANT}} = 50 \Omega$; $Z_{\text{RX}} = 50 \Omega$; $Z_{\text{TX}} = 50 \Omega$

Characteristics TX - ANT		min.	typ.	max.	
Center frequency	f_c	—	836,50	—	MHz
Maximum insertion attenuation	α_{max}	—	1,8	2,1	dB
	824,00 ... 849,00 MHz				
Amplitude ripple (p-p)	$\Delta\alpha$	—	0,8	1,1	dB
	824,00 ... 849,00 MHz				
Return loss		10	12	—	dB
	824,00 ... 849,00 MHz				
Attenuation	α				dB
	100,00 ... 698,00 MHz	35	39	—	
	698,00 ... 746,00 MHz	36	38	—	
	746,00 ... 804,00 MHz	30	38	—	
	869,00 ... 894,00 MHz	46	50	—	
	954,00 ... 1570,00 MHz	30	36	—	
	1570,00 ... 1698,00 MHz	40	50	—	
	1698,00 ... 2547,00 MHz	30	38	—	
	2547,00 ... 3000,00 MHz	20	27	—	

Characteristics ANT - RX		min.	typ.	max.	
Center frequency	f_c	—	881,50	—	MHz
Maximum insertion attenuation	α_{max}	—	2,2	2,6	dB
	869,00 ... 894,00 MHz				
Amplitude ripple (p-p)	$\Delta\alpha$	—	0,9	1,3	dB
	869,00 ... 894,00 MHz				
Return loss		9	11	—	dB
	869,00 ... 894,00 MHz				
Attenuation	α				dB
	100,00 ... 804,00 MHz	35	43	—	
	824,00 ... 849,00 MHz	54	61	—	
	954,00 ... 1648,00 MHz	35	45	—	
	1648,00 ... 1698,00 MHz	40	51	—	
	1698,00 ... 2547,00 MHz	40	50	—	
	2547,00 ... 3000,00 MHz	35	45	—	
TX band phase @ RX port reference plane					degree
	824,00 ... 849,00 MHz	130	—	230	



SAW Components

B7638

Low-Loss Filter for Mobile Communication

836,5 / 881,5 MHz

Data Sheet



Characteristics TX - RX		min.	typ.	max.	
Isolation between TX and RX path					α
100,00 ...	800,00 MHz	50	57	—	dB
824,00 ...	849,00 MHz	56	59	—	dB
869,00 ...	894,00 MHz	47	50	—	dB
954,00 ...	1700,00 MHz	45	51	—	dB



SAW Components

B7638

Low-Loss Filter for Mobile Communication

836,5 / 881,5 MHz

Data Sheet



Characteristics

Operating temperature range $T = -30$ to 85°C

Terminating impedance $Z_{\text{ANT}} = 50 \Omega$; $Z_{\text{RX}} = 50 \Omega$; $Z_{\text{TX}} = 50 \Omega$

Characteristics TX - ANT		min.	typ.	max.	
Center frequency	f_c	—	836,50	—	MHz
Maximum insertion attenuation	α_{max}	—	2,0	2,3	dB
	824,00 ... 849,00 MHz				
Amplitude ripple (p-p)	$\Delta\alpha$	—	1,0	1,3	dB
	824,00 ... 849,00 MHz				
Return loss		9	11	—	dB
	824,00 ... 849,00 MHz				
Attenuation	α				
	100,00 ... 698,00 MHz	35	39	—	dB
	698,00 ... 746,00 MHz	36	38	—	dB
	746,00 ... 804,00 MHz	30	38	—	dB
	869,00 ... 894,00 MHz	45	48	—	dB
	954,00 ... 1570,00 MHz	30	36	—	dB
	1570,00 ... 1698,00 MHz	40	50	—	dB
	1698,00 ... 2547,00 MHz	30	38	—	dB
	2547,00 ... 3000,00 MHz	20	27	—	dB

Characteristics ANT - RX		min.	typ.	max.	
Center frequency	f_c	—	881,50	—	MHz
Maximum insertion attenuation	α_{max}	—	2,4	2,8	dB
	869,00 ... 894,00 MHz				
Amplitude ripple (p-p)	$\Delta\alpha$	—	1,3	1,7	dB
	869,00 ... 894,00 MHz				
Return loss		8	10	—	dB
	869,00 ... 894,00 MHz				
Attenuation	α				
	100,00 ... 804,00 MHz	35	43	—	dB
	824,00 ... 849,00 MHz	54	59	—	dB
	954,00 ... 1648,00 MHz	35	46	—	dB
	1648,00 ... 1698,00 MHz	40	51	—	dB
	1698,00 ... 2547,00 MHz	40	50	—	dB
	2547,00 ... 3000,00 MHz	35	45	—	dB
TX band phase @ RX port reference plane					
	824,00 ... 849,00 MHz	130	—	230	degree



SAW Components

B7638

Low-Loss Filter for Mobile Communication

836,5 / 881,5 MHz

Data Sheet



Characteristics TX - RX		min.	typ.	max.	
Isolation between TX and RX path α					
100,00 ...	800,00 MHz	50	56	—	dB
824,00 ...	849,00 MHz	55	57	—	dB
869,00 ...	894,00 MHz	47	49	—	dB
954,00 ...	1700,00 MHz	45	51	—	dB



SAW Components

B7638


Low-Loss Filter for Mobile Communication

836,5 / 881,5 MHz


Data Sheet



Frequency Response TX - ANT

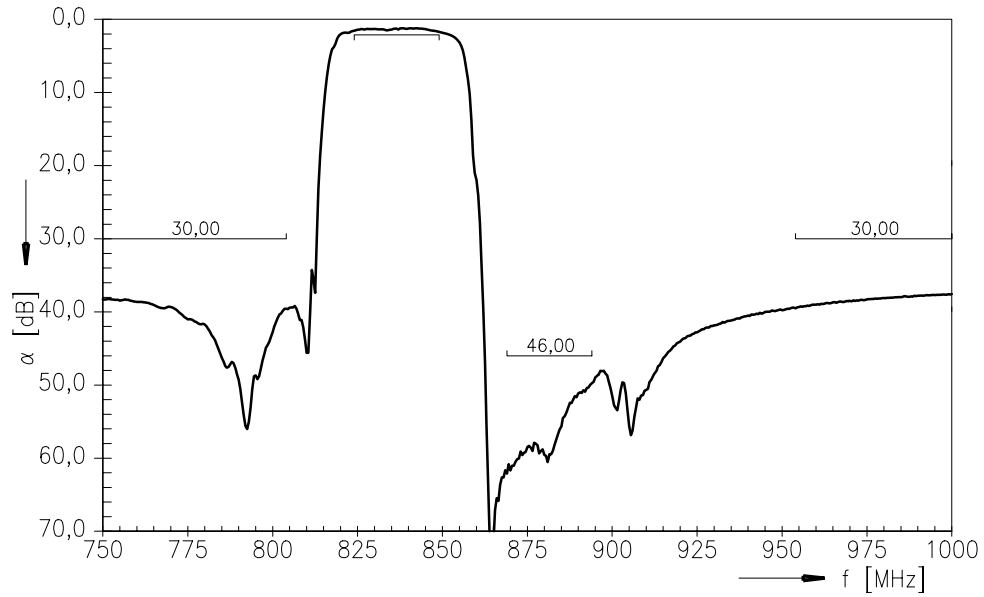

Frequency Response TX - ANT (wideband)

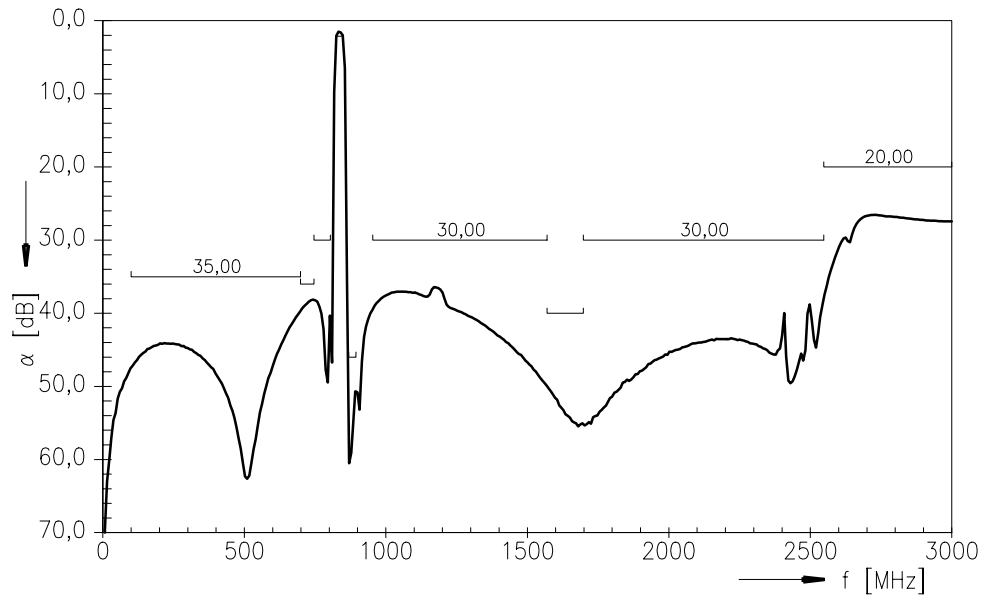



SAW Components

B7638


Low-Loss Filter for Mobile Communication

836,5 / 881,5 MHz


Data Sheet



Frequency Response ANT - RX

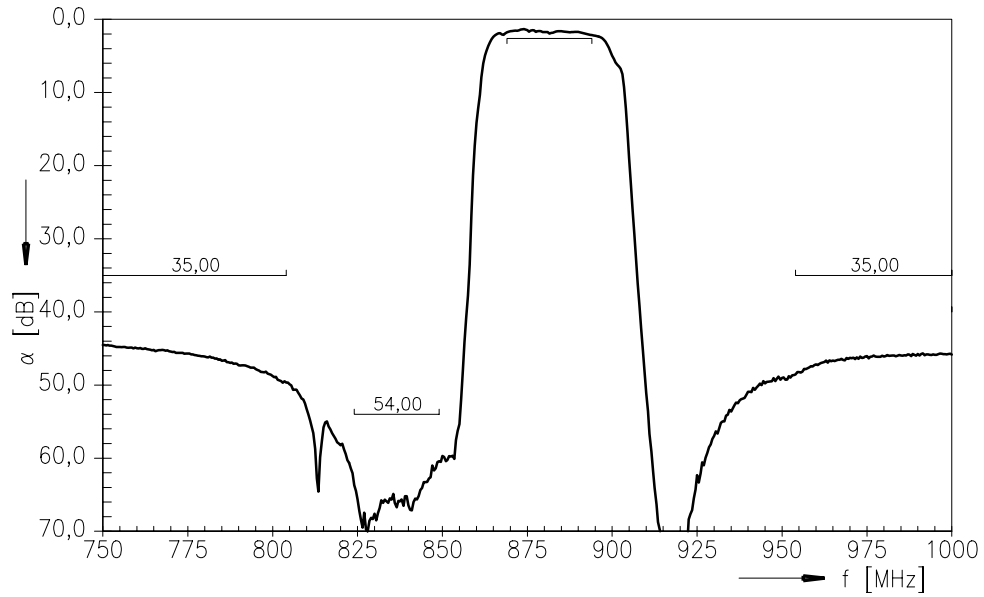

Frequency Response ANT - RX (wideband)

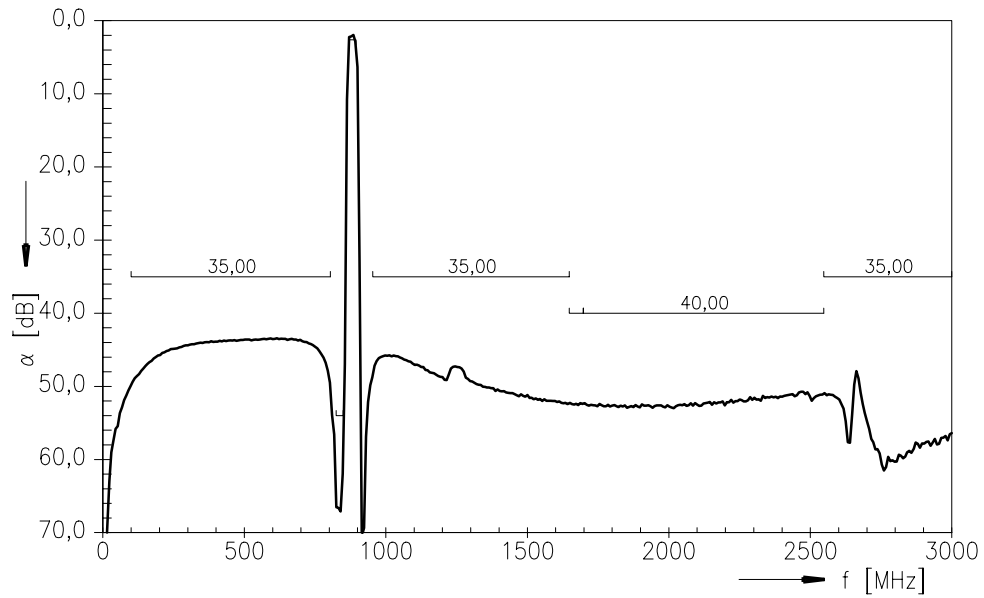



SAW Components

B7638


Low-Loss Filter for Mobile Communication

836,5 / 881,5 MHz


Data Sheet



Frequency Response TX - RX

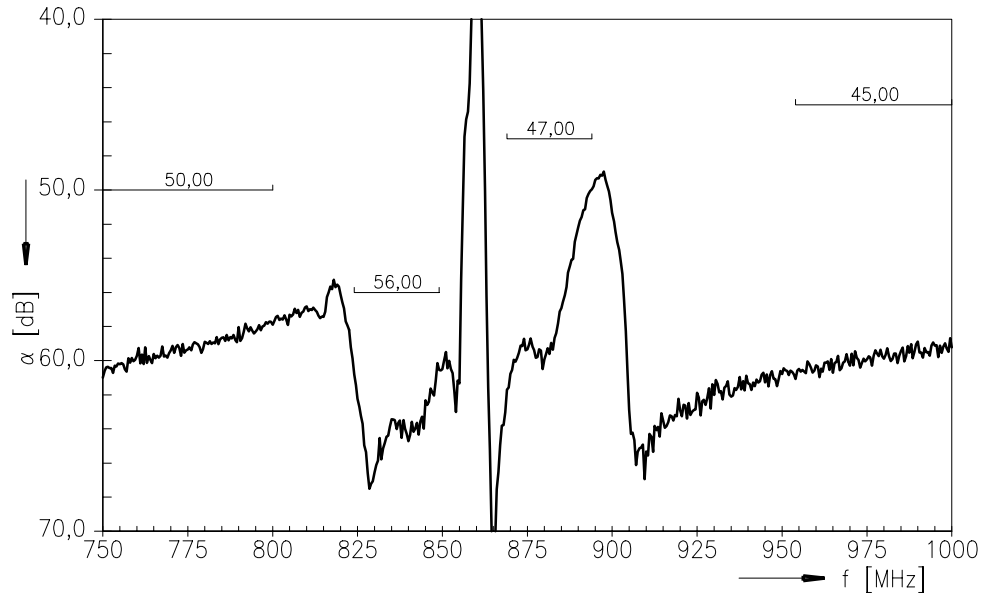

Frequency Response TX - RX (wideband)

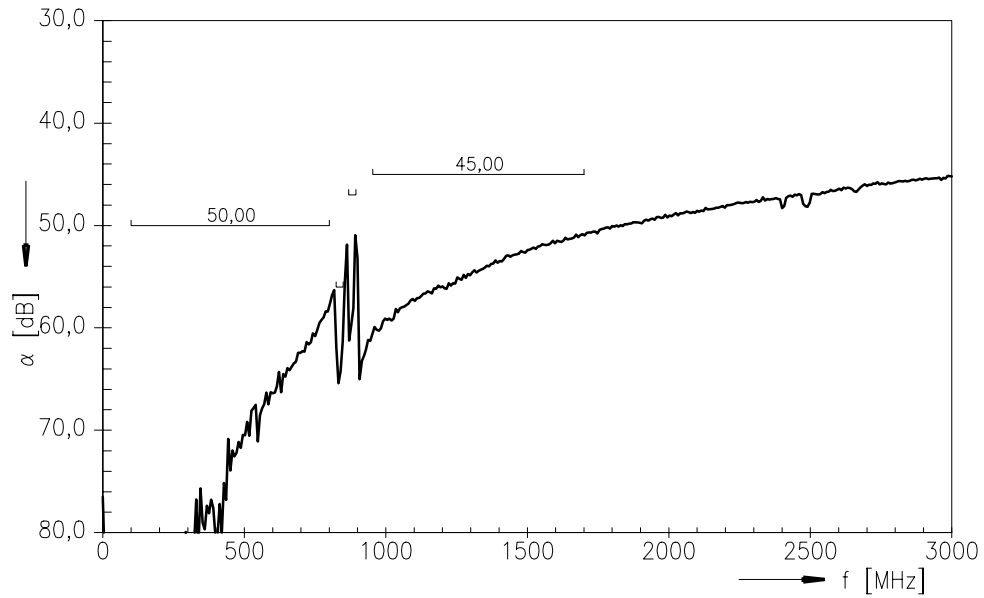



SAW Components

B7638

Low-Loss Filter for Mobile Communication

836,5 / 881,5 MHz

Data Sheet



For further information please contact your local EPCOS sales office or visit our webpage at www.epcos.com .

**Published by EPCOS AG
Surface Acoustic Wave Components Division
P.O. Box 80 17 09, 81617 Munich, GERMANY**

© EPCOS AG 2008. This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.



Important Notes

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of passive electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of a passive electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of a passive electronic component.
3. The warnings, cautions and product-specific notes must be observed.
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as "hazardous")**. Useful information on this will be found in our Material Data Sheets on the Internet (www.epcos.com/material). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available.
6. Unless otherwise agreed in individual contracts, **all orders are subject to the current version of the "General Terms of Delivery for Products and Services in the Electrical Industry" published by the German Electrical and Electronics Industry Association (ZVEI)**.
7. The trade names EPCOS, CeraDiode, CSSP, PhaseCap, PhaseMod, SIFI, SIKOREL, SilverCap, SIMID, SIOV, SIP5D, SIP5K, TOPcap, UltraCap, WindCap are **trademarks registered or pending** in Europe and in other countries. Further information will be found on the Internet at www.epcos.com/trademarks.