

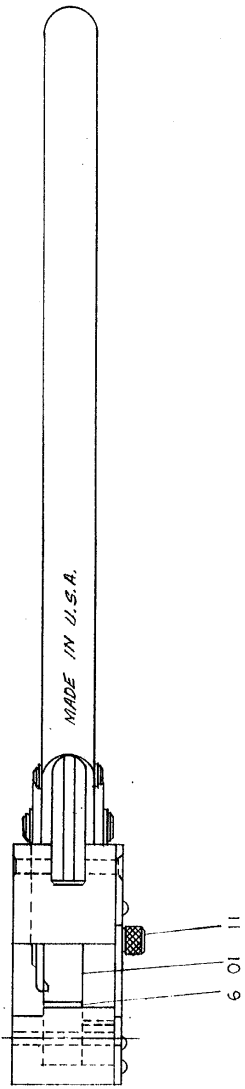
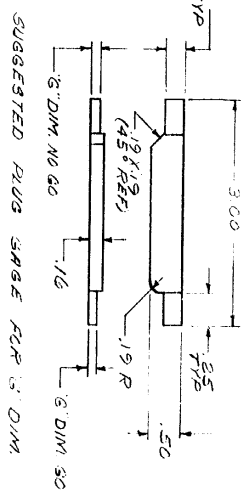


Number 69959


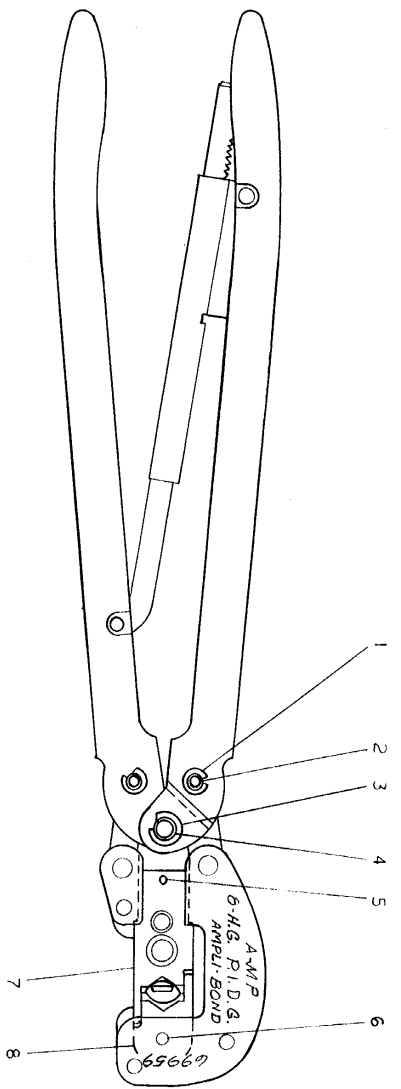


SUPERSEDED BY U.S. 2434



"C" DIM.	
GO	NO GO
201	207

3/4 AT PAS. #1	
GO	NO GO
.152	.152

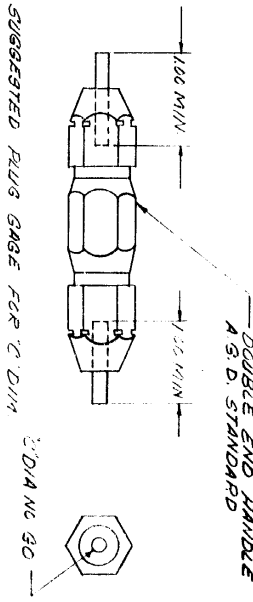

SUGGESTED PLUG GAGE FOR C DIM

PLUG GAGE DIMENSIONS APPLY WHEN TOOL IS BOTTOMED BUT NOT UNDER PRESSURE.

For replacement of parts other than those shown, they should be returned to the factory to insure proper carti-clip adjustment.

DIMENSIONS IN INCHES. DO NOT SCALE PRINT.

PRINT PART	QTY	DESCRIPTION	DATE
1	1	Hand Tool Assembly	
1	1	Barrel Crimp	
1	1	Insulation Crimp	
1	1	Plug Gage C DIM	
1	1	Plug Gage 3/4 DIA	

REQUIRED PER ASSEMBLY	DESCRIPTION	QUANTITY
1	Hand Tool Assembly	1
1	Barrel Crimp	1
1	Insulation Crimp	1
1	Plug Gage C DIM	1
1	Plug Gage 3/4 DIA	1

DATE	BY	CHKD	APP'D
10/10/59	J. J. ...	J. J. ...	J. J. ...

WIRE BRAND	INSULATION	TYPE
AMPLI-BOND	AMPLI-BOND	AMPLI-BOND

CLASS	TYPE
AMPLI-BOND	AMPLI-BOND

NO	DATE	REVISION
1	10/10/59	1