



## SAW Components

### SAW IF Filter

W-CDMA base station, Rx

<b>Series/Type:</b>	<b>B5026</b>
<b>Ordering code:</b>	<b>B39191-B5026-H510</b>
Date:	Jun 06, 2006
Version:	2.1

© EPCOS AG 2005. Reproduction, publication and dissemination of this data sheet, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.



SAW Components

B5026

Low-Loss Filter

190.00 MHz

Data Sheet

SMD


### Application

- Low-loss IF filter for W-CDMA base station, receive path (Rx)
- Unbalanced or balanced operation possible
- High near-by selectivity
- Temperature stable




### Features

- Package size 13.3 x 6.5 x 1.6 mm<sup>3</sup>
- Package code DCC12A
- RoHS compatible
- Approx. weight 0.4 g
- Ceramic package for **Surface Mount Technology (SMT)**
- Ni, gold-plated terminals
- **Electrostatic Sensitive Device (ESD)**
- Filter surface passivated

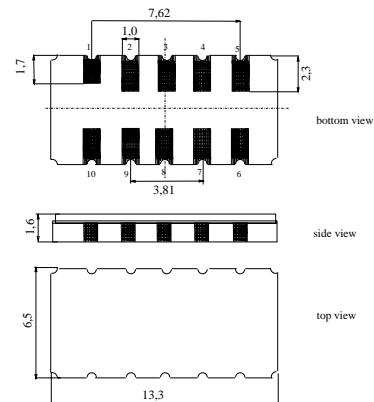

### Pin configuration

- 10 Input
- 1 Input ground
- 5 Output
- 6 Output ground
- 3,8 To be grounded
- 2,4,7,9 Case ground

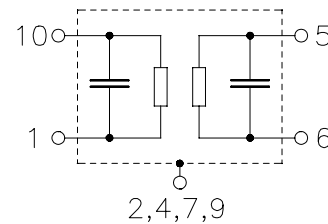

Please read *cautions and warnings and important notes* at the end of this document.


**SAW Components**
**B5026**
**Low-Loss Filter**
**190.00 MHz**
**Data Sheet**

**Characteristics**

Operating temperature range:	T = -30 to +85 °C
Terminating source impedance:	Z <sub>S</sub> = 50 Ω and matching network
Terminating load impedance:	Z <sub>L</sub> = 50 Ω and matching network

		min.	typ. @ 25 °C	max.	
<b>Nominal frequency</b>	f <sub>N</sub>	—	190.0	—	MHz
<b>Minimum insertion attenuation</b> (including matching network)	α <sub>min</sub>	—	12.0	15.0	dB
<b>Passband width</b>	α <sub>rel</sub> ≤ 1 dB B <sub>1dB</sub>	3.84	4.2	—	MHz
	α <sub>rel</sub> ≤ 30 dB B <sub>30dB</sub>	—	4.8	—	MHz
<b>Amplitude ripple (p-p)</b>	f <sub>N</sub> ± 1.92 MHz Δα	—	0.7	1.0	dB
<b>Phase ripple (rms)</b>	f <sub>N</sub> ± 1.92 MHz Δφ	—	1.0	1.5	° rms
<b>Absolute group delay</b> mean value within f <sub>N</sub> ± 1.92 MHz at 25 °C <sup>1)</sup>	τ	1688	1693	1698	ns
<b>Error vector magnitude</b>	f <sub>N</sub> ± 1.92 MHz EVM	—	2.0	—	%
<b>Adjacent channel suppression</b> f <sub>N</sub> ± 3.08 MHz ... f <sub>N</sub> ± 6.92 MHz	ACS	—	50	—	dB
<b>Relative attenuation (relative to α<sub>min</sub>)</b>	f <sub>N</sub> ± 2.515 MHz...f <sub>N</sub> ± 3.08 MHz	32	38	—	dB
	f <sub>N</sub> ± 3.08 MHz...f <sub>N</sub> ± 3.5 MHz	37	42	—	dB
	f <sub>N</sub> ± 3.5 MHz...f <sub>N</sub> ± 20 MHz	40	45	—	dB
<b>Temperature coefficient of frequency</b> <sup>2)</sup>	TC <sub>f</sub>	—	-0.036	—	ppm/K <sup>2</sup>
<b>Turnover temperature</b>	T <sub>0</sub>	—	20	—	°C

- 1) At other temperatures the variation from filter to filter is also restricted to +/- 5 ns.  
From -30 ... +85 °C the variation of mean value of group delay is restricted to +/- 10 ns.
- 2) Temperature dependance of f<sub>c</sub>: f<sub>c</sub>(T<sub>A</sub>) = f<sub>c</sub>(T<sub>0</sub>) (1 + TC<sub>f</sub>(T<sub>A</sub> - T<sub>0</sub>)<sup>2</sup>)

**Maximum ratings**

Operable temperature range	T	-40/+85	°C	
Storage temperature range	T <sub>stg</sub>	-40/+85	°C	
DC voltage	V <sub>DC</sub>	3	V	
Input Power(passband)	P <sub>IN</sub>	10	dBm	
Input Power(stopband)	P <sub>IN</sub>	20	dBm	f <sub>N</sub> ± 5 MHz...f <sub>N</sub> ± 70 MHz

Please read *cautions and warnings and important notes* at the end of this document.




Data Sheet




Matching network to 50 Ω

Element values depend upon board layout.

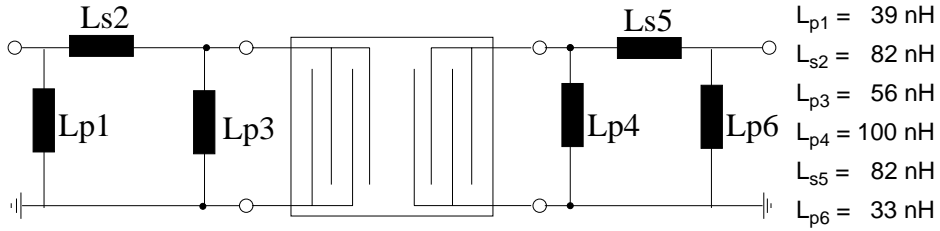


Alternative matching network to 50 Ω

Element values depend upon board layout.

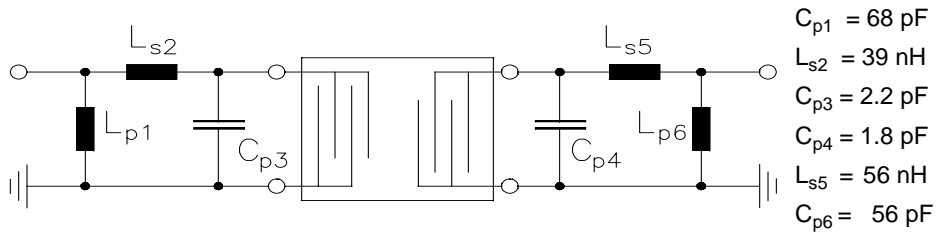




Transfer function

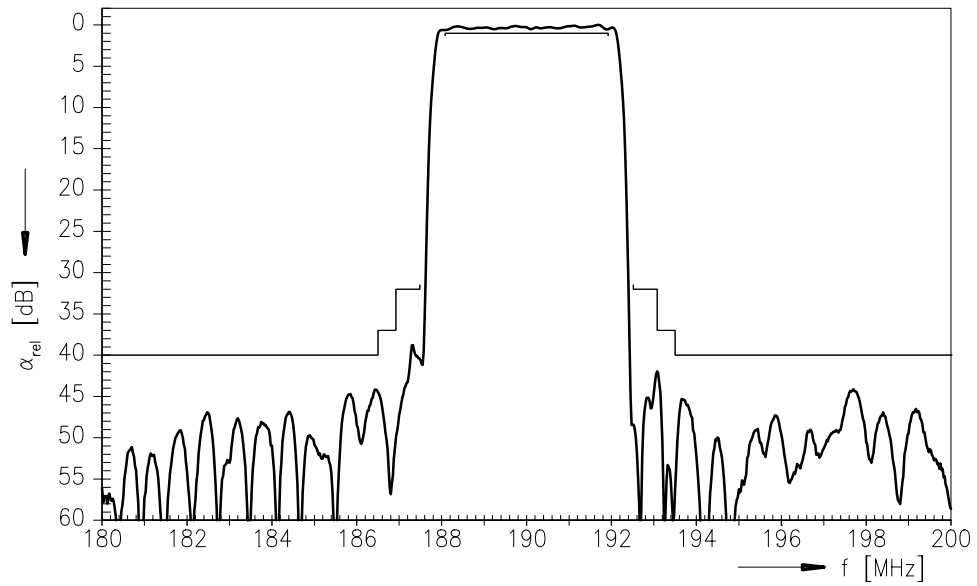

Transfer function (passband)

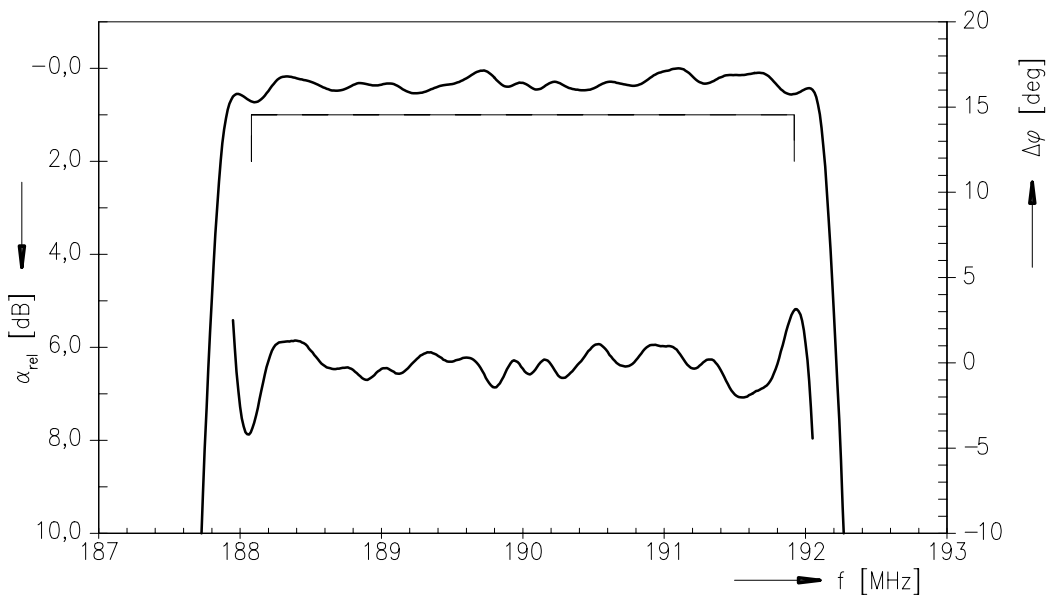

Please read *cautions and warnings and important notes* at the end of this document.



**SAW Components**

**B5026**

**Low-Loss Filter**

**190.00 MHz**

Data Sheet



<b>Type</b>	B5026	
<b>Ordering code</b>	B39191-B5026-H510	
<b>Marking and Package</b>	<b>C61157-A7-A94</b>	
<b>Packaging</b>	<b>F61074-V8163-Z000</b>	
<b>Date Codes</b>	L_1126	
<b>S-Parameters</b>		
<b>Soldering profile</b>	S_6001	

**For further information please contact your local EPCOS sales office or visit our webpage at [www.epcos.com](http://www.epcos.com) .**

**Published by EPCOS AG  
Surface Acoustic Wave Components Division  
P.O. Box 80 17 09, 81617 Munich, GERMANY**

© EPCOS AG 2005. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.

Please read *cautions and warnings and important notes* at the end of this document.



## Important notes

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of passive electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of a passive electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of a passive electronic component.
3. The warnings, cautions and product-specific notes must be observed.
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as "hazardous")**. Useful information on this will be found in our Material Data Sheets on the Internet ([www.epcos.com/material](http://www.epcos.com/material)). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available.
6. Unless otherwise agreed in individual contracts, **all orders are subject to the current version of the "General Terms of Delivery for Products and Services in the Electrical Industry" published by the German Electrical and Electronics Industry Association (ZVEI)**.
7. The trade names EPCOS, CeraDiode, CSSP, PhaseCap, PhaseMod, SIFI, SIKOREL, SilverCap, SIMID, SIOV, SIP5D, SIP5K, TOPcap, UltraCap, WindCap are **trademarks registered or pending** in Europe and in other countries. Further information will be found on the Internet at [www.epcos.com/trademarks](http://www.epcos.com/trademarks).