

**DATA SHEET**

# SMP1330 Series: Plastic Packaged Limiter Diodes

## Features



- Low-distortion design
- Limiter performance to 2 GHz and higher
- Low insertion loss
- Low-cost plastic package
- Available in tape and reel packaging
- Available lead (Pb)-free and RoHS-compliant




## Description

The SMP1330 series of limiter diodes in plastic packages is designed for use as a passive receiver protector in wireless and other RF systems covering 2 GHz and higher. It employs Skyworks limiter diode technology to produce a gold doped thin base limiter chip for low-loss, low-distortion performance and good limiter action. This device has been characterized in limiter circuits and tightly specified to insure consistent performance.

**NEW** Skyworks offers lead (Pb)-free, RoHS (Restriction of Hazardous Substances)-compliant packaging.

	
Series Pair	Low Inductance
SOT-23	SOT-23
<b>SMP1330-005</b>	<b>SMP1330-007</b>
Marking: PQ2	Marking: PQB
<b>SMP1330-005LF</b>	<b>SMP1330-007LF</b>
Marking: RQ2	Marking: RQB
$L_S = 1.5 \text{ nH}$	$L_S = 0.4 \text{ nH}$

 LF denotes lead (Pb)-free, RoHS-compliant packaging option as an alternative to our standard tin/lead (Sn/Pb) packaging.

## Absolute Maximum Ratings

Characteristic	Value
Reverse voltage ( $V_R$ )	20 V
Forward current ( $I_F$ )	100 mA
CW incident power @ 25 °C lead temperature	1 W
Peak incident power @ 1% duty factor 1 $\mu$ S pulse	100 W
Power dissipation @ 25 °C lead temperature ( $P_D$ )	250 mW
Storage temperature ( $T_{ST}$ )	-65 °C to +150 °C
Operating temperature ( $T_{OP}$ )	-65 °C to +150 °C
ESD human body model	Class 2


Performance is guaranteed only under the conditions listed in the specifications table and is not guaranteed under the full range(s) described by the Absolute Maximum specifications. Exceeding any of the absolute maximum/minimum specifications may result in permanent damage to the device and will void the warranty.

**CAUTION:** Although this device is designed to be as robust as possible, ESD (Electrostatic Discharge) can damage this device. This device must be protected at all times from ESD. Static charges may easily produce potentials of several kilovolts on the human body or equipment, which can discharge without detection. Industry-standard ESD precautions must be employed at all times.

### Electrical Specifications at 25 °C

Parameter	Condition	Min.	Typ.	Max.	Unit
Series resistance ( $R_S$ )	10 mA, 100 MHz		1.2	1.5	$\Omega$
Capacitance ( $C_T$ )	0 V, 1 MHz		0.7	1	pF
Capacitance ( $C_T$ )	0 V, 1 GHz		0.7		pF
Conductance (G)	0 V, 1 GHz		50		$\mu$ s
Carrier lifetime (TI)	$I_F = 10$ mA		4		ns
I region width			3		$\mu$ m
Breakdown voltage ( $V_{BR}$ )	$I_R = 10$ $\mu$ A	20	35	50	V

### Typical Performance Data

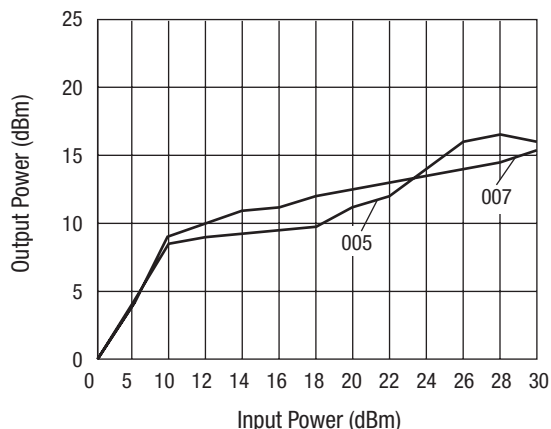

Typical 1 GHz Limiter Performance

### Typical 1 GHz Limiter Performance

SMP1330	Condition	-005
Connection		Parallel
Insertion loss	$P = -20$ dBm	0.3 dB
IP3	$P = < 0$ dBm	30 dBm
1 dB compression		10 dBm
Attenuation at 20 dBm		8.8 dB
Attenuation at 30 dBm		14 dB

### Recommended Solder Reflow Profiles


Refer to the [“Recommended Solder Reflow Profile”](#) Application Note.

### Tape and Reel Information

Refer to the [“Discrete Devices and IC Switch/Attenuators Tape and Reel Package Orientation”](#) Application Note.

### Packages



The SMP1330 series is available in two wiring configurations, each utilizing industry standard SOT-23.



### SMP1330-005 Series Pair SOT-23

This series pair is designed for use as antiparallel limiter diodes by externally connecting pins 1 and 2 of the SOT-23 package. In a limiter circuit, no DC return is needed and limiting action is improved because inductance is reduced to approximately 0.8 nH. A small increase in loss occurs from the higher capacitance and conductance.

### SOT-23

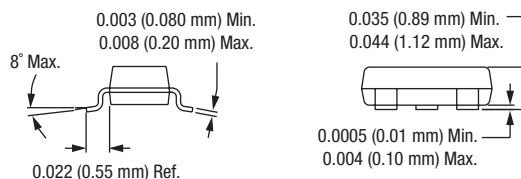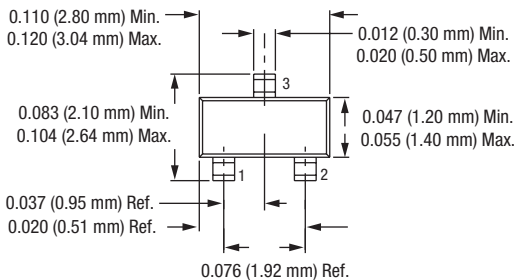

Copyright © 2002, 2003, 2004, 2005, Skyworks Solutions, Inc. All Rights Reserved.

Information in this document is provided in connection with Skyworks Solutions, Inc. ("Skyworks") products or services. These materials, including the information contained herein, are provided by Skyworks as a service to its customers and may be used for informational purposes only by the customer. Skyworks assumes no responsibility for errors or omissions in these materials or the information contained herein. Skyworks may change its documentation, products, services, specifications or product descriptions at any time, without notice. Skyworks makes no commitment to update the materials or information and shall have no responsibility whatsoever for conflicts, incompatibilities, or other difficulties arising from any future changes.

No license, whether express, implied, by estoppel or otherwise, is granted to any intellectual property rights by this document. Skyworks assumes no liability for any materials, products or information provided hereunder, including the sale, distribution, reproduction or use of Skyworks products, information or materials, except as may be provided in Skyworks Terms and Conditions of Sale.

THE MATERIALS, PRODUCTS AND INFORMATION ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, WHETHER EXPRESS, IMPLIED, STATUTORY, OR OTHERWISE, INCLUDING FITNESS FOR A PARTICULAR PURPOSE OR USE, MERCHANTABILITY, PERFORMANCE, QUALITY OR NON-INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHT; ALL SUCH WARRANTIES ARE HEREBY EXPRESSLY DISCLAIMED. SKYWORKS DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. SKYWORKS SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING BUT NOT LIMITED TO ANY SPECIAL, INDIRECT, INCIDENTAL, STATUTORY, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS THAT MAY RESULT FROM THE USE OF THE MATERIALS OR INFORMATION, WHETHER OR NOT THE RECIPIENT OF MATERIALS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Skyworks products are not intended for use in medical, lifesaving or life-sustaining applications, or other equipment in which the failure of the Skyworks products could lead to personal injury, death, physical or environmental damage. Skyworks customers using or selling Skyworks products for use in such applications do so at their own risk and agree to fully indemnify Skyworks for any damages resulting from such improper use or sale.

Customers are responsible for their products and applications using Skyworks products, which may deviate from published specifications as a result of design defects, errors, or operation of products outside of published parameters or design specifications. Customers should include design and operating safeguards to minimize these and other risks. Skyworks assumes no liability for applications assistance, customer product design, or damage to any equipment resulting from the use of Skyworks products outside of stated published specifications or parameters.

Skyworks, the Skyworks symbol, and "Breakthrough Simplicity" are trademarks or registered trademarks of Skyworks Solutions, Inc., in the United States and other countries. Third-party brands and names are for identification purposes only, and are the property of their respective owners. Additional information, including relevant terms and conditions, posted at [www.skyworksinc.com](http://www.skyworksinc.com), are incorporated by reference.