


SC511MF

SMD POWER INDUCTORS

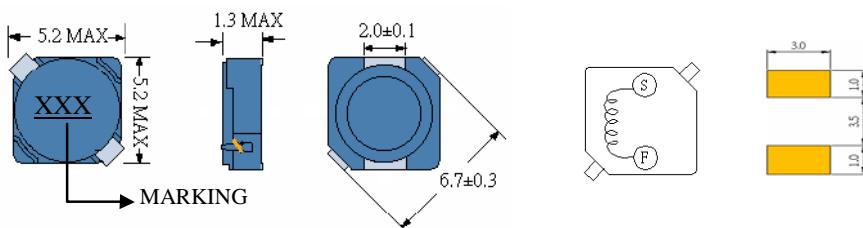



- Features

1. Magnetically shielded construction – Low EMI
- 2 Excellent Power Density
- 3 Engineered to Provide High Efficiency



ELECTRICAL CHARACTERISTICS

| Part Number | Inductance (uH) (1) | Test Frequency | DC Resistance (Ω MAX) (2) | Saturation Current (3) (A) | Temperature Current (4) (A) |
|-------------|---------------------|----------------|---------------------------|----------------------------|-----------------------------|
| SC511MF-1R5 | 1.5 | 100KHZ | 70m | 1.60 | 2.50 |
| SC511MF-2R2 | 2.2 | 100KHZ | 112m | 1.38 | 2.20 |
| SC511MF-3R3 | 3.3 | 100KHZ | 120m | 1.09 | 1.80 |
| SC511MF-4R7 | 4.7 | 100KHZ | 140m | 0.90 | 1.51 |
| SC511MF-5R6 | 5.6 | 100KHZ | 145m | 0.83 | 1.25 |
| SC511MF-6R8 | 6.8 | 100KHZ | 175m | 0.71 | 1.15 |
| SC511MF-8R6 | 8.6 | 100KHZ | 215m | 0.63 | 1.00 |
| SC511MF-100 | 10 | 100KHZ | 238m | 0.59 | 0.96 |
| SC511MF-120 | 12 | 100KHZ | 300m | 0.56 | 0.92 |
| SC511MF-150 | 15 | 100KHZ | 340m | 0.50 | 0.86 |
| SC511MF-180 | 18 | 100KHZ | 420m | 0.42 | 0.80 |
| SC511MF-220 | 22 | 100KHZ | 475m | 0.40 | 0.76 |
| SC511MF-270 | 27 | 100KHZ | 560m | 0.32 | 0.70 |
| SC511MF-330 | 33 | 100KHZ | 816m | 0.30 | 0.58 |
| SC511MF-390 | 39 | 100KHZ | 915m | 0.25 | 0.52 |
| SC511MF-470 | 47 | 100KHZ | 1.16 | 0.20 | 0.46 |
| SC511MF-560 | 56 | 100KHZ | 1.32 | 0.18 | 0.42 |
| SC511MF-680 | 68 | 100KHZ | 1.64 | 0.15 | 0.37 |
| | | | | | |
| | | | | | |
| | | | | | |

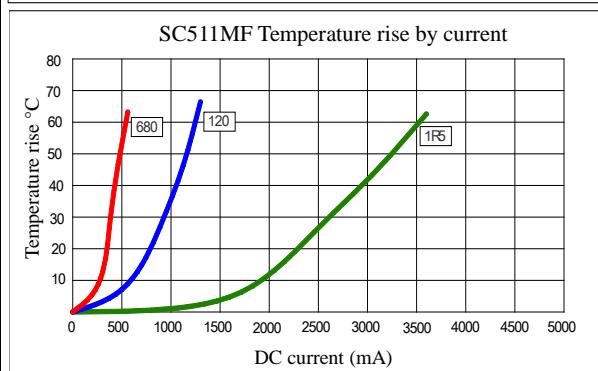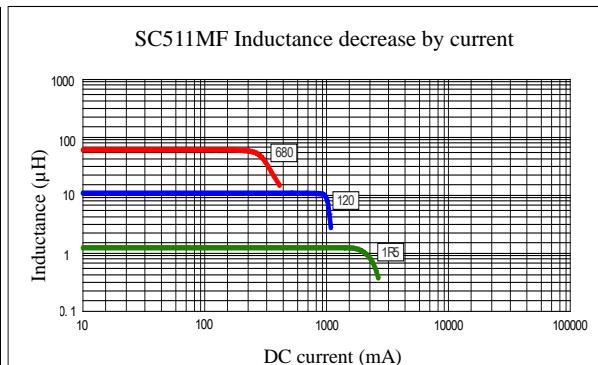

(1). Inductance tolerance ±20% tested at 0.25V, 0ADC and 25°C.

(2). DCR measured at 25°C.

(3). The DC current at which the inductance decreases by 10% from its initial value.

(4). The DC current that results in a 40°C temperature rise from 25°C ambient.

[Click here for QUANTITY PER REEL & PACKING INFORMATION](#)

Custom versions available upon request.

©2011 Signal Transformer –Specification subject to change without notice. 07.11

Signal Transformer

www.signaltransformer.com

500 Bayview Avenue, Inwood, NY 11096

Toll Free 866-239-5777 • Tel 516-239-5777 • Fax 516-239-7208

Sales@signaltransformer.com • techhelp@signaltransformer.com