



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN AMP PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM AMP INCORPORATED, HARRISBURG, PA.

DIMENSIONS IN INCHES. DO NOT SCALE PRINT.

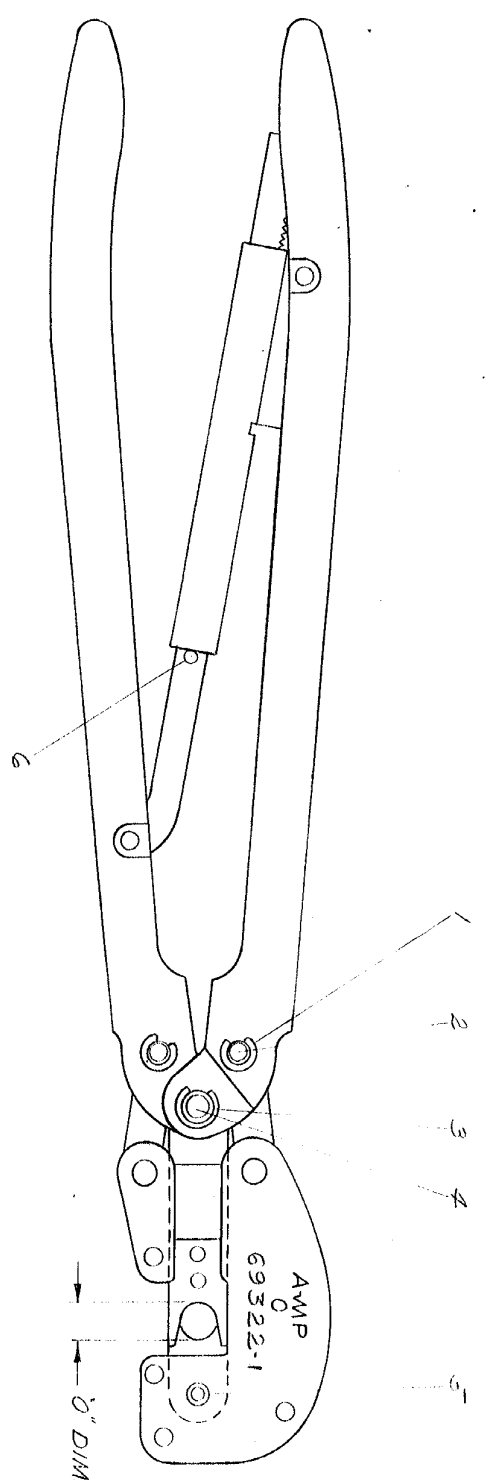

SUGGESTED PLUG
GAGE DESIGN

0" DIM.	
GO	NO GO
.298	.309

Gage dimensions apply when tool is bottomed but not under pressure.

For replacement of parts other than listed, tool should be returned to our factory to insure proper Certi-Crimp adjustment.

PRINT DIST
B
3

AMP 1253 REV 7/69 8

7 6 5 4 3 2 1

REVISION RECORD	REV. BY	CHK. DATE
1	RY	6/18/64
2	RS	10/8/64
3		
4		
5		
6		
7		
8		
9		

NUMBER	DESCRIPTION
69322-1	69322-1

DR	CHK	APP
7/5/64	7/13/64	6/18/64

WIRE RANGE - INSULATION	TYPE	CLASS
20S	LAMINATED	
SCALE	LOC	NO
1-1	M	B
SCALE EXCEPT	REV	
1" = 1" O	B	69322-1
NAME	REV	
HAND TOOL ASSEMBLY	B	

Q1947 BY AMP INCORPORATED. ALL RIGHTS RESERVED. AMP PRODUCTS COVERED BY PATENTS AND/OR PATENTS PENDING.	REMARKS
CUSTOMER COPY REFERENCE ONLY	
1 - 304190-4	PIN
1 - 5-21028-7	PIN-ROLL
1 - 300389	PIN-RETAINING
2 - 21045-6	RING-RETAINING
2 - 300388	PIN-RETAINING
4 - 21045-3	RING-RETAINING