

July 2007



- The Pletronics' S3881 is a quartz crystal controlled precision square wave generator with a CMOS output.
- The package is designed for high density surface mount designs.
- This is a low cost mass produced oscillator.
- Tape and Reel packaging is available.

- 32.768 kHz
- 2.5 x 4.0 mm LCC Ceramic Package
- Enable/Disable Function on pad 1 with low power consumption
- Start-up Time of 3 Seconds or less

# Pletronics Inc. certifies this device is in accordance with the RoHS 6/6 (2002/95/EC) and WEEE (2002/96/EC) directives.

Pletronics Inc. guarantees the device does not contain the following: Cadmium, Hexavalent Chromium, Lead, Mercury, PBB's, PBDE's

Weight of the Device: 0.09 grams

Moisture Sensitivity Level: 1 As defined in J-STD-020C

Second Level Interconnect code: e4

### **Absolute Maximum Ratings:**

Parameter	Unit
V <sub>cc</sub> Supply Voltage	-0.5V to +7.0V
Vi Input Voltage	-0.5V to V <sub>CC</sub> + 0.5V
Vo Output Voltage	-0.5V to V <sub>CC</sub> + 0.5V

#### **Thermal Characteristics**


The maximum die or junction temperature is 155°C

The thermal resistance junction to board is 30 to 50°C/Watt depending on the solder pads, ground plane and construction of the PCB.



July 2007

### Part Number:

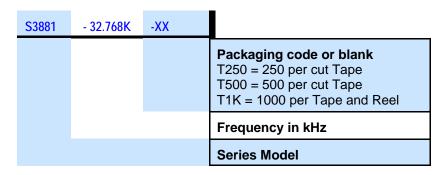

### Part Marking:

**Pywws** or **Pymd** Where: *yywws or ymd* = Date code

32.76 32.76

#### **Codes for Date Code YMD**

Code	6	7	8	9	0	1	2
Year	2006	2007	2008	2009	2010	2011	2012

Code	Α	В	С	D	Е	F	G	H	7	K	L	М
Month	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC

Code	1	2	3	4	5	6	7	8	9	Α	В	С
Day	1	2	3	4	5	6	7	8	9	10	11	12
Code	D	Е	F	G	Н	J	K	L	М	N	Р	R
Day	13	14	15	16	17	18	19	20	21	22	23	24
Code	Т	U	V	W	Х	Y	Z					
Day	25	26	27	28	29	30	31					



July 2007

#### Reliability: Environmental Compliance

Parameter	Condition
Mechanical Shock	MIL-STD-883 Method 2002, Condition B
Vibration	MIL-STD-883 Method 2007, Condition A
Solderability	MIL-STD-883 Method 2003
Thermal Shock	MIL-STD-883 Method 1011, Condition A

### **ESD Rating**

Model	Minimum Voltage	Conditions
Human Body Model	1500	MIL-STD-883 Method 3115
Charged Device Model	1000	JESD 22-C101

### **Package Labeling**

Label is 1" x 2.6" (25.4mm x 66.7mm) Font is Courier New Bar code is 39-Full ASCII

P/N: \$\ \text{S3881-32.768K} \\ \text{Customer P/N: }\ \\ \text{12345678} \\ \text{Qty: }\ \\ \text{1000} \\ \text{1000} \\ \text{0514-H} \end{array}

Label is 1" x 2.6" (25.4mm x 66.7mm) Font is Arial

**RoHS Compliant** 

2nd LvL Interconnect Category=e4

Max Safe Temp=260C for 10s 2X Max



July 2007

### Electrical Specification for Vcc 1.3V to 5.5V over - 40 to +85°C


Item	Min	Тур	Max	Unit	Condition		
Frequency		32.768		kHz			
Frequency Calibration Tolerance	-10	0	+30	ppm	at $V_{CC} = 3.3V$ and	25 °C	
Frequency Stability *	-100	-	+30	ppm	when operating at -20 to +70 °C		
	-200	-	+30	ppm	when operating at	-40 to +85 °C	
Frequency versus Supply	0	0.5	2.0	ppm	for V <sub>cc</sub> range of 2.	3 V to 5.5V	
Output Waveform		CN	//OS				
Output High Level	90	-	-	%	of V <sub>cc</sub> (See load	circuit)	
Output Low Level	-	-	10	%	of V <sub>cc</sub> (See load	circuit)	
Output T <sub>RISE</sub> and T <sub>FALL</sub>	-	50	200	nS	$C_{LOAD} = 15pF$ $T_R$	/ T <sub>F</sub> 10% to 90% and	
Output Symmetry	45	50	55	%	D.C. at 50% point (See load circuit)	of V <sub>CC</sub>	
V disable	-	-	10	%	of V <sub>cc</sub> applied to p	oad 1	
V enable	90	-	-	%	of V <sub>cc</sub> applied to p	pad 1	
Output leakage V <sub>OUT</sub> = V <sub>CC</sub>	-10	-	+10	uA	Pad 1 low, device	disabled	
V <sub>OUT</sub> = 0V	-10	-	+10	uA			
Supply Current (I <sub>cc</sub> )	-	0.8	0.9	uA	V <sub>CC</sub> = 1.3 V	C <sub>LOAD</sub> = 1 pF	
	1	1.2	1.5	uA	V <sub>CC</sub> = 3.3 V		
	-	2.2	2.6	uA	V <sub>CC</sub> = 5.5 V		
	1	1.9	2.3	uA	V <sub>CC</sub> = 1.3 V	C <sub>LOAD</sub> = 15 pF	
	-	4.3	5.2	uA	V <sub>CC</sub> = 3.3V		
	1	7.5	9.0	uA	V <sub>CC</sub> = 5.5V		
Standby Current I <sub>CC</sub>	1	-	200	nA	Pad 1 low, device	disabled at 25 °C	
Enable time	-	-	100	nS	Time for output to reach a logic state		
Disable time	-	-	100	nS	Time for output to reach a high Z state		
Start up time Enable time	-	0.9	3	S	Time for output to reach specified frequency		
Operating Temperature Range	-40	-	+85	°C			
Storage Temperature Range	-55	-	+125	°C			

<sup>\*</sup>For all supply voltages, load changes, aging for 1 year, shock, vibration and temperatures Specifications with Pad 1 E/D open circuit unless otherwise stated.





July 2007

### **Typical Frequency versus Temperature Characteristics**

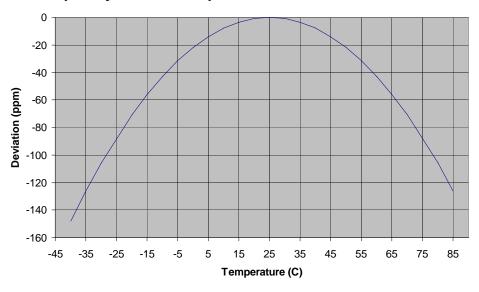

#### **Load Circuit and Test Waveform**

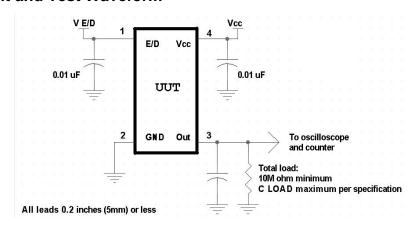


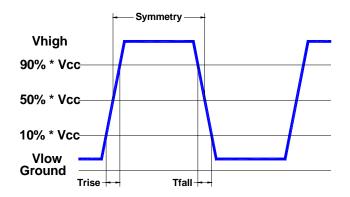



July 2007

#### Mechanical:

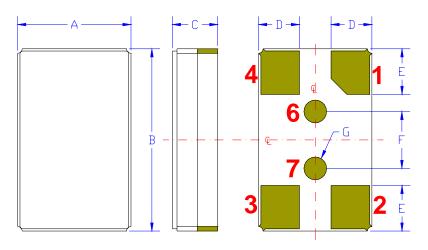

	Inches	mm
Α	0.098 <u>+</u> 0.008	2.5 <u>+</u> 0.20
В	0.157 <u>+</u> 0.008	4.0 <u>+</u> 0.20
С	0.039 <u>+</u> 0.004	1.0 <u>+</u> 0.10
D¹	0.035	0.9
E¹	0.039	1.0
F¹	0.047	1.20
Ğ	0.016D	0.40D

Contacts:

Gold 11.8 µinches 0.3 µm minimum over Nickel 50 to 350 µinches 1.27 to 8.89 µm

Not to Scale

<sup>1</sup> Typical dimensions

Pad	Function	Note
1	Output Enable/Disable	When this pad is not connected the oscillator shall operate. When this pad is logic low the output will be inhibited (high impedance state.) Recommend connecting this pad to $V_{\rm CC}$ if the oscillator is to be always on.
2	Ground (GND)	
3	Output	
4	Supply Voltage (V <sub>cc</sub> )	Recommend connecting appropriate power supply bypass capacitors as close as possible.
6	Internal Connection	Do not connect to this pad
7	Internal Connection	Do not connect to this pad



#### Layout and application information


For Optimum Jitter Performance, Pletronics recommends:

- a ground plane under the device while avoiding connection to the two dot pads on the bottom. Use the PCB solder mask to isolate the two dot pads
- no large transient signals (both current and voltage) should be routed under the device
- do not layout near a large magnetic field such as a high frequency switching power supply
- do not place near piezoelectric buzzers or mechanical fans.



July 2007

## Reflow Cycle (typical for lead free processing)

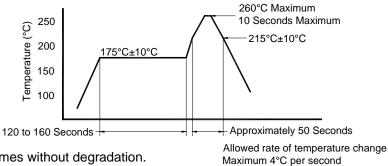

The part may be reflowed 2 times without degradation.

### Tape and Reel: available for quantities of 1000 per reel, cut tape for < 1000


	Constant Dimensions Table 1									
Tape Size	D0	D1 Min	E1	P0	P2	S1 Min	T Max	T1 Max		
8mm		1.0			2.0					
12mm	1.5	1.5	1.75	4.0	<u>+</u> 0.05					
16mm	+0.1 -0.0	1.5	<u>+</u> 0.1	<u>+</u> 0.1	2.0	0.6	0.6	0.1		
24mm		1.5			<u>+</u> 0.1					


	Variable Dimensions Table 2									
Tape Size										
12 mm 12.1 14.25 7.5 ±0.1 8.0 ±0.1 8.0 16.3 Note 1										

Note 1: Embossed cavity to conform to EIA-481-B

Dimensions in mm

Not to scale

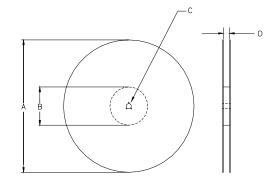

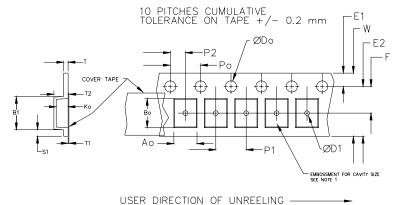

		REE	L DIMENSI	SNC		
Α	inches	7.0	10.0	13.0		
	mm	177.8	254.0	330.2		
В	inches	2.50	4.00	3.75		
	mm	63.5	101.6	95.3	Tape Width	
С	mm	13	3.0 +0.5 / -0	.2	vvidiri	
D	mm	12.4 +2.0 -0.0	+2.0 +2.0 +2.0			

Reel dimensions may vary from the above



July 2007

#### IMPORTANT NOTICE

Pletronics Incorporated (PLE) reserves the right to make corrections, improvements, modifications and other changes to this product at anytime. PLE reserves the right to discontinue any product or service without notice. Customers are responsible for obtaining the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to PLE's terms and conditions of sale supplied at the time of order acknowledgment.

PLE warrants performance of this product to the specifications applicable at the time of sale in accordance with PLE's limited warranty. Testing and other quality control techniques are used to the extent PLE deems necessary to support this warranty. Except where mandated by specific contractual documents, testing of all parameters of each product is not necessarily performed.

PLE assumes no liability for application assistance or customer product design. Customers are responsible for their products and applications using PLE components. To minimize the risks associated with the customer products and applications, customers should provide adequate design and operating safeguards.

PLE products are not designed, intended, authorized or warranted to be suitable for use in life support applications, devices or systems or other critical applications that may involve potential risks of death, personal injury or severe property or environmental damage. Inclusion of PLE products in such applications is understood to be fully at the risk of the customer. Use of PLE products in such applications requires the written approval of an appropriate PLE officer. Questions concerning potential risk applications should be directed to PLE.

PLE does not warrant or represent that any license, either express or implied, is granted under any PLE patent right, copyright, artwork or other intellectual property right relating to any combination, machine or process which PLE product or services are used. Information published by PLE regarding third-party products or services does not constitute a license from PLE to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from PLE under the patents or other intellectual property of PLE.

Reproduction of information in PLE data sheets or web site is permissible only if the reproduction is without alteration and is accompanied by associated warranties, conditions, limitations and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. PLE is not responsible or liable for such altered documents.

Resale of PLE products or services with statements different from or beyond the parameters stated by PLE for that product or service voids all express and implied warranties for the associated PLE product or service and is an unfair or deceptive business practice. PLE is not responsible for any such statements.

#### **Contacting Pletronics Inc.**

Pletronics Inc. Tel: 425-776-1880 19013 36<sup>th</sup> Ave. West Fax: 425-776-2760

Lynnwood, WA 98036-5761 USA E-mail: ple-sales@pletronics.com

URL: <u>www.pletronics.com</u>

Copyright © 2006, 2007, Pletronics Inc.