

# **EVAL6585D-230V**

## Combo IC for PFC and ballast control

Data Brief

## **General description**

A new control IC, the L6585, has been designed to manage electronic ballasts for fluorescent lamps; it includes both Power Factor Correction and half-bridge sections and embeds a wide range of features to provide an energy saving and cost effective solution.

The high-voltage single chip approach optimizes the management of lamp critical conditions like start-up (pre-heating and ignition), fault and lamp replacement. In fact, the internal logic is able to carry out all of these phases being steered by precise internal references and timings.

The PFC section has superior performance in terms of harmonic content mitigation. High Power Factor (PF) and Total Harmonic Distortion (THD)


reduction are obtained as required by international norms, especially in case of Universal input voltage operation.

Particular care has been dedicated to pre-heating and ignition phases prior to lamp starting, in order to ensure the proper filament warming up and extend lamp life.

Innovative circuitry allows an improved control of the lamp voltage during ignition as well protection against failures due to lamp ageing. The use of this new control IC simplifies the industrialization of electronic ballasts increasing the application reliability and reducing its dimensions and cost.

For more info about the L6585D please refer to the related datasheet available at www.st.com.

## **Evaluation board**

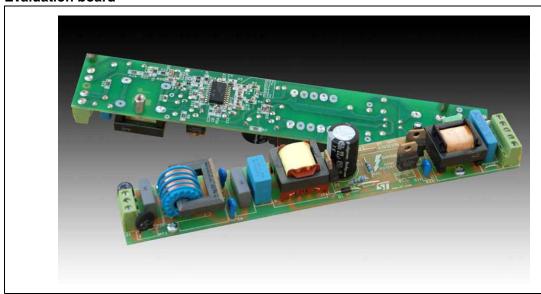

November 2006 Rev 1 1/6

### 230V Demo application description 1

The design has been developed to drive a 54W TL fluorescent lamp. Specifically created to drive a T5 lamp, the demo board implements the end of life and the open lamp protections on the half bridge side, and the over-voltage and feedback disconnection protections on the PFC side. This circuit is intended to be used with 230V AC mains.

C13 100nF 250V 836 510 5 R37 510k R34 R26 680k 827 680k R7 88 6 2 년 883 \$ <del>\$</del> % S29 short R21 short R28 short 0.00 P.00 22 450V 330n C18 ₹ 38 4 6 8 8 R30 240K 100 d 83 910k 910k ₩ ₩ - CSO 3.6M 3.6M 8 \$ ₹ \$ 88 \$ 84 5 4 4 TT 8 R10 820k R1 4 820 4 80 F

Figure 1. **Evaluation board schematic** 

2/6

Table 1. Part list

Name	Value
BR1	DF06S
R1, R2	3.6ΜΩ
R3, R4	910K
R5	n.c
R6	42.2ΚΩ
R7	short
R8	n.c
R9	13.3ΚΩ
R10, R11	820ΚΩ
R12	1.2ΜΩ
R13	$47\Omega$
R14	47ΚΩ
R15	62ΚΩ
R16	56ΚΩ
R17, R18	$47\Omega$
R19	0.68, 1W
R20	$47\Omega$
R21	short
C1	22μF, 450V, EPCOS B43888A5226M9
C2	10nF
C3	n.c
C4	470nF
C5	680nF
C6, C7	1nF, 1KV
C8	330nF
C9	470nF, 630V, EPCCOS B32652
C10	4.7nF, 2kV EPCOS B32653
C11	1nF, 630V
C12	470pF
C13	100nF, 250V
C13b	short
C14, C15	100nF, X2, 275Vac, EPCOS
C16	100nF
C17	100nF
	•

**577** 

Table 1. Part list (continued)

C19       10nF         R22       0.82         R23       330         R24       n.c         R25       n.c         R26, R27       680KΩ         R28, R29       short         R30       240KΩ         R31       20KΩ         R32       8.2KΩ         R33       240KΩ         R43       open         R35       1MΩ         R36, R37       510KΩ         R38       12KΩ         Q1       STP4NK50ZD         Q2       STP4NK50ZD         Q3       STD3NK50Z1         Q4       BC817         IC1       L6585D         C20       1nF         C21       n.c         C22       n.c         C23       10nF         C24       330nF         T1       E25, 2.1mH, EPCOS T2363         T2       39mH, EPCOS B822731         F1       A fuse         RT1       NTC, 16R	Name	Value
R22       0.82         R23       330         R24       n.c         R25       n.c         R26, R27       680KΩ         R28, R29       short         R30       240KΩ         R31       20KΩ         R32       8.2KΩ         R33       240KΩ         R43       open         R35       1MΩ         R36, R37       510KΩ         R38       12KΩ         Q1       STP4NK50ZD         Q2       STP4NK50ZD         Q3       STD3NK50Z1         Q4       BC817         IC1       L6585D         C20       1nF         C21       n.c         C22       n.c         C23       10nF         C24       330nF         T1       E25, 2.1mH, EPCOS T2363         T2       39mH, EPCOS B822731         F1       2A fuse         RT1       NTC, 16R	C18	10μF, 35V
R23       330         R24       n.c         R25       n.c         R26, R27       680KΩ         R28, R29       short         R30       240KΩ         R31       20KΩ         R32       8.2KΩ         R33       240KΩ         R43       open         R35       1MΩ         R36, R37       510KΩ         R38       12KΩ         Q1       STP4NK50ZD         Q2       STP4NK50ZD         Q3       STD3NK50Z1         Q4       BC817         IC1       L6585D         C20       1nF         C21       n.c         C22       n.c         C23       10nF         C24       330nF         T1       E25, 2.1mH, EPCOS T2363         T2       39mH, EPCOS B822731         F1       2A fuse         RT1       NTC, 16R	C19	10nF
R24       n.c         R25       n.c         R26, R27       680KΩ         R28, R29       short         R30       240KΩ         R31       20KΩ         R32       8.2KΩ         R33       240KΩ         R43       open         R35       1MΩ         R36, R37       510KΩ         R38       12KΩ         Q1       STP4NK50ZD         Q2       STP4NK50ZD         Q3       STD3NK50Z1         Q4       BC817         IC1       L6585D         C20       1nF         C21       n.c         C22       n.c         C23       10nF         C24       330nF         T1       E25, 2.1mH, EPCOS T2363         T2       39mH, EPCOS B822731         F1       2A fuse         RT1       NTC, 16R	R22	0.82
R25       n.c         R26, R27       680KΩ         R28, R29       short         R30       240KΩ         R31       20KΩ         R32       8.2KΩ         R33       240KΩ         R43       open         R35       1MΩ         R36, R37       510KΩ         R38       12KΩ         Q1       STP4NK50ZD         Q2       STP4NK50ZD         Q3       STD3NK50Z1         Q4       BC817         IC1       L6585D         C20       1nF         C21       n.c         C22       n.c         C23       10nF         C24       330nF         T1       E25, 2.1mH, EPCOS T2363         T2       39mH, EPCOS B822731         F1       2A fuse         RT1       NTC, 16R	R23	330
R28, R29       short         R30       240ΚΩ         R31       20ΚΩ         R32       8.2ΚΩ         R33       240ΚΩ         R43       open         R35       1ΜΩ         R36, R37       510ΚΩ         R38       12ΚΩ         Q1       STP4NK50ZD         Q2       STP4NK50ZD         Q3       STD3NK50Z1         Q4       BC817         IC1       L6585D         C20       1nF         C21       n.c         C22       n.c         C23       10nF         C24       330nF         T1       E25, 2.1mH, EPCOS T2363         T2       39mH, EPCOS B822731         F1       2A fuse         RT1       NTC, 16R	R24	n.c
R28, R29       short         R30       240KΩ         R31       20KΩ         R32       8.2KΩ         R33       240KΩ         R43       open         R35       1MΩ         R36, R37       510KΩ         R38       12KΩ         Q1       STP4NK50ZD         Q2       STD3NK50Z1         Q4       BC817         IC1       L6585D         C20       1nF         C21       n.c         C22       n.c         C23       10nF         C24       330nF         T1       E25, 2.1mH, EPCOS T2363         T2       39mH, EPCOS B822731         F1       2A fuse         RT1       NTC, 16R	R25	n.c
R31       240ΚΩ         R32       8.2ΚΩ         R33       240ΚΩ         R43       open         R35       1ΜΩ         R36, R37       510ΚΩ         R38       12ΚΩ         Q1       STP4NK50ZD         Q2       STP4NK50ZD         Q3       STD3NK50Z1         Q4       BC817         IC1       L6585D         C20       1nF         C21       n.c         C22       n.c         C23       10nF         C24       330nF         T1       E25, 2.1mH, EPCOS T2363         T2       39mH, EPCOS B822731         F1       2A fuse         RT1       NTC, 16R	R26, R27	680ΚΩ
R31       20ΚΩ         R32       8.2ΚΩ         R33       240ΚΩ         R43       open         R35       1ΜΩ         R36, R37       510ΚΩ         R38       12ΚΩ         Q1       STP4NK50ZD         Q2       STP4NK50ZD         Q3       STD3NK50Z1         Q4       BC817         IC1       L6585D         C20       1nF         C21       n.c         C22       n.c         C23       10nF         C24       330nF         T1       E25, 2.1mH, EPCOS T2363         T2       39mH, EPCOS B822731         F1       2A fuse         RT1       NTC, 16R	R28, R29	short
R32       8.2ΚΩ         R33       240ΚΩ         R43       open         R35       1MΩ         R36, R37       510ΚΩ         R38       12ΚΩ         Q1       STP4NK50ZD         Q2       STP4NK50ZD         Q3       STD3NK50Z1         Q4       BC817         IC1       L6585D         C20       1nF         C21       n.c         C22       n.c         C23       10nF         C24       330nF         T1       E25, 2.1mH, EPCOS T2363         T2       39mH, EPCOS B822731         F1       2A fuse         RT1       NTC, 16R	R30	240ΚΩ
R33       240ΚΩ         R43       open         R35       1MΩ         R36, R37       510ΚΩ         R38       12ΚΩ         Q1       STP4NK50ZD         Q2       STP4NK50ZD         Q3       STD3NK50Z1         Q4       BC817         IC1       L6585D         C20       1nF         C21       n.c         C22       n.c         C23       10nF         C24       330nF         T1       E25, 2.1mH, EPCOS T2363         T2       39mH, EPCOS B822731         F1       2A fuse         RT1       NTC, 16R	R31	20ΚΩ
R43       open         R35       1MΩ         R36, R37       510KΩ         R38       12KΩ         Q1       STP4NK50ZD         Q2       STP4NK50ZD         Q3       STD3NK50Z1         Q4       BC817         IC1       L6585D         C20       1nF         C21       n.c         C22       n.c         C23       10nF         C24       330nF         T1       E25, 2.1mH, EPCOS T2363         T2       39mH, EPCOS B822731         F1       2A fuse         RT1       NTC, 16R	R32	8.2ΚΩ
R35       1MΩ         R36, R37       510KΩ         R38       12KΩ         Q1       STP4NK50ZD         Q2       STD3NK50Z1         Q4       BC817         IC1       L6585D         C20       1nF         C21       n.c         C22       n.c         C23       10nF         C24       330nF         T1       E25, 2.1mH, EPCOS T2363         T2       39mH, EPCOS B822731         F1       2A fuse         RT1       NTC, 16R	R33	240ΚΩ
R36, R37       510KΩ         R38       12KΩ         Q1       STP4NK50ZD         Q2       STP4NK50Z1         Q4       BC817         IC1       L6585D         C20       1nF         C21       n.c         C22       n.c         C23       10nF         C24       330nF         T1       E25, 2.1mH, EPCOS T2363         T2       39mH, EPCOS B822731         F1       2A fuse         RT1       NTC, 16R	R43	open
R38       12ΚΩ         Q1       STP4NK50ZD         Q2       STP4NK50ZD         Q3       STD3NK50Z1         Q4       BC817         IC1       L6585D         C20       1nF         C21       n.c         C22       n.c         C23       10nF         C24       330nF         T1       E25, 2.1mH, EPCOS T2363         T2       39mH, EPCOS B822731         F1       2A fuse         RT1       NTC, 16R	R35	1ΜΩ
Q1       STP4NK50ZD         Q2       STP4NK50ZD         Q3       STD3NK50Z1         Q4       BC817         IC1       L6585D         C20       1nF         C21       n.c         C22       n.c         C23       10nF         C24       330nF         T1       E25, 2.1mH, EPCOS T2363         T2       39mH, EPCOS B822731         F1       2A fuse         RT1       NTC, 16R	R36, R37	510ΚΩ
Q2       STP4NK50ZD         Q3       STD3NK50Z1         Q4       BC817         IC1       L6585D         C20       1nF         C21       n.c         C22       n.c         C23       10nF         C24       330nF         T1       E25, 2.1mH, EPCOS T2363         T2       39mH, EPCOS B822731         F1       2A fuse         RT1       NTC, 16R	R38	12ΚΩ
Q3       STD3NK50Z1         Q4       BC817         IC1       L6585D         C20       1nF         C21       n.c         C22       n.c         C23       10nF         C24       330nF         T1       E25, 2.1mH, EPCOS T2363         T2       39mH, EPCOS B822731         F1       2A fuse         RT1       NTC, 16R	Q1	STP4NK50ZD
Q4     BC817       IC1     L6585D       C20     1nF       C21     n.c       C22     n.c       C23     10nF       C24     330nF       T1     E25, 2.1mH, EPCOS T2363       T2     39mH, EPCOS B822731       F1     2A fuse       RT1     NTC, 16R	Q2	STP4NK50ZD
IC1     L6585D       C20     1nF       C21     n.c       C22     n.c       C23     10nF       C24     330nF       T1     E25, 2.1mH, EPCOS T2363       T2     39mH, EPCOS B822731       F1     2A fuse       RT1     NTC, 16R	Q3	STD3NK50Z1
C20     1nF       C21     n.c       C22     n.c       C23     10nF       C24     330nF       T1     E25, 2.1mH, EPCOS T2363       T2     39mH, EPCOS B822731       F1     2A fuse       RT1     NTC, 16R	Q4	BC817
C21     n.c       C22     n.c       C23     10nF       C24     330nF       T1     E25, 2.1mH, EPCOS T2363       T2     39mH, EPCOS B822731       F1     2A fuse       RT1     NTC, 16R	IC1	L6585D
C22     n.c       C23     10nF       C24     330nF       T1     E25, 2.1mH, EPCOS T2363       T2     39mH, EPCOS B822731       F1     2A fuse       RT1     NTC, 16R	C20	1nF
C23     10nF       C24     330nF       T1     E25, 2.1mH, EPCOS T2363       T2     39mH, EPCOS B822731       F1     2A fuse       RT1     NTC, 16R	C21	n.c
C24     330nF       T1     E25, 2.1mH, EPCOS T2363       T2     39mH, EPCOS B822731       F1     2A fuse       RT1     NTC, 16R	C22	n.c
T1 E25, 2.1mH, EPCOS T2363  T2 39mH, EPCOS B822731  F1 2A fuse  RT1 NTC, 16R	C23	10nF
T2 39mH, EPCOS B822731  F1 2A fuse  RT1 NTC, 16R	C24	330nF
F1 2A fuse  RT1 NTC, 16R	T1	E25, 2.1mH, EPCOS T2363
RT1 NTC, 16R	T2	39mH, EPCOS B822731
	F1	2A fuse
D1 STTH1L06	RT1	NTC, 16R
	D1	STTH1L06
D2 1N4148	D2	1N4148
D3 1N4148	D3	1N4148
D4 1N4148	D4	1N4148

**577** 

EVAL6585D-230V Revision history

Table 1. Part list (continued)

Name	Value
D5	BZX84C15ZTX
L1	ITACOIL, 1.3mH

# 2 Revision history

Table 2. Revision history

Date	Revision	Changes
22-Nov-2006	1	First issue

5/6

#### Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION). OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2006 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com

**577** 

6/6