

POWER TRANSFORMER MOUNT: WORLD SERIES

VPP20-250

Electrical Specifications (@25C)

- 1. Maximum Power: 5.0VA
- 2. Input: Series: 230VAC, 50/60Hz; Parallel: 115VAC, 50/60Hz 3. Output: Series1: 20.0V CT@ 0.25A; Parallel2: 10.0V @ 0.5A
- 4. Voltage Regulation: 25% TYP @ full load to no load
- 5. Temperature Rise: 30C TYP (45C MAX allowed)
- 6. Insulation Resistance: $100M\Omega$
- 7. Hipot: 4000VAC between primary to secondary and windings to core.



Construction:

Dual bobbin construction with an insulated shroud, both made of a high temperature material that exceeds UL flammability requirements.

Safety:

Since the dual bobbin construction effectively reduces capacitance, electrostatic shielding is not required. World Series Transformers are designed and manufactured to meet the following agency approvals:

Unite: In inches







Agency File:

UL: File E53148, UL 5085-1 and 3 (formerly UL 506), General Purpose. UL: File E65390, UL 5085-1 and 3 (formerly UL1585), Class 2/3.

CSA: File LR 37220. C22.2 NO. 66, General Purpose.

TUV: File R 72072385, EN 60950, (IEC950) information Technology Equipment.

A.	Dimensions:					

A. Dimensions.							Units. In inches			
A	4	В	С	D	Ш	F	G	Ι		
1.0)62	1.375	0.187	0.200	0.400	1.312	1.625	1.000		
	B BULBUL 0.00=00									

B. PIN DIM.: 0.025 SQ C. WT Lbs.: 0.37

D. Mounting Holes: 0.112 dia. x 2.0

Connections³:

Input: Series - Pin 1 to Pin 6, Jumper Pin 4 to Pin 3

Parallel - Pin 1 to Pin 6, Jumper Pin 1 to Pin 4 and Pin 3 to Pin 6

Output: Series – Pin 7 to Pin 12, Jumper Pin 9 to Pin 10

Parallel - Pin 7 to Pin 12, Jumper Pin 7 to Pin 10 and Pin 9 to Pin 12

RoHS Compliance: Meets the requirements of 2002/95/EC, known as the RoHS initiative.


* Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics' website for the most current version.




² Inherently limited. No fusing required. Class 2.

Web: www.TriadMagnetics.com Phone 951-277-0757 Fax 951-277-2757

22520B Temescal Canyon Road Corona, California 92883

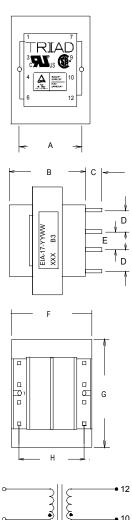



SCHEMATIC

Publish Date: August 3, 2009

³ Primary and secondary windings are designed to be connected in series or parallel. Winding are not intended to be used independently.