

Electronic timers

Selection guide

2

Applications

Electronic timers enable simple automation cycles to be set up using wired logic. They can also be used to complement the functions of PLCs.

Timers with solid state output reduce the amount of wiring required (wired in series). The durability of these timers is independent of the number of operating cycles.



Enclosure type	Modular 17.5 mm	DIN, width 22.5 mm	
Timing range Number of ranges	1	1	2
Extreme values	Depending on model: 0.1...3 s 1...30 s 10...300 s 2...60 min	Depending on model: 0.1...10 s 0.3...30 s 3...300 s 40 s...60 min	0.1...10 s 3...300 s
Output circuit			
Control circuit voltage, depending on model	$\overline{\sim}$ 24...240 V \sim 24...240 V	$\overline{\sim}$ 24...240 V \sim 24...240 V	
Type	RE1	RE9	
Pages	2/5	2/8 and 2/9	

Relay outputs provide complete isolation between the supply circuit and the output. It is possible to have several output circuits.

Universal: multi-voltage, multifunction, 7 or 10 timing ranges

Optimum
1 single timing range



7	10	1
<p>0.05...1 s 0.15...3 s 0.5...10 s 1.5...30 s 5...100 s 15...300 s 1.5...10 min</p>	<p>0.05...1 s 0.15...3 s 0.5...10 s 1.5...30 s 5...100 s 15...300 s 1.5...30 min 15...300 min 1.5...30 h 15...300 h</p>	<p>Depending on model: 0.05...0.5 s 0.05...15 s 0.1...3 s 0.1...10 s 0.3...30 s 3...300 s 20 s...30 min</p>
<p>⎓ or ~ 24 V, 42...48 V, 24...240 V ~ 110...240 V</p>		<p>⎓ 24 V ~ 24 V, 110...130 V, 220...240 V, 380...415 V</p>
<p>RE7</p>		<p>RE8</p>


2/8 and 2/9


Zelio Time - timing relays


Functions and selection

Functions	
Diagram	Operating principle


2


On-delay	
Control or supply C/O contact 	Timing starts when the relay is energised. When the set time delay (t) has elapsed, the output contact closes. When the relay is de-energised, the contact returns to its initial position. The output contact does not close if the duration of the control instruction is less than the set time delay. Timing can also be started by opening of a control contact (models with external control).


Off-delay	
Control or supply C/O contact 	Energisation of the relay or closing of the control contact (models with external control) causes the output relay to close instantaneously. Timing starts when the relay is de-energised or when the control contact opens. When the set time delay (t) has elapsed, the contact returns to its initial position. If the energisation time or closing time of the control contact is less than the minimum time specified, the timing period does not start.

On and Off-delay	
Control or supply C/O contact 	This function is a combination of the On and Off delay functions. The timing cycle must be controlled by an external contact.


Symmetrical	The On and Off delays are equal.
Asymmetrical	The On and Off delays are adjusted by 2 different potentiometers.

Timing relay with pulse on energisation	
Supply C/O contact 	Energisation of the relay causes the output contact to close instantaneously and start the timing period. The contact returns to its initial position when the set time delay (t) has elapsed or if the supply is cut off before the end of the timing period.

Timing relay with pulse on de-energisation or on opening of a external control contact	
Control or supply C/O contact 	De-energisation of the relay or opening of the external control contact (depending on model) causes the output contact to close instantaneously and start the timing period. When the set time delay (t) has elapsed, the contact returns to its initial position.

Flashing relay	
Supply C/O contact 	Energisation of the relay starts the flashing period and causes the output relay to start the flashing cycle. When the relay is de-energised, the contact returns to its initial position.

Symmetrical flashing relay	The On and Off flashing phases are identical.
Asymmetrical flashing relay	The On and Off flashing phases are adjusted by 2 different potentiometers (t_a and t_r).

Time delay relays for star-delta starters	
Supply Star Delta 	Energisation of the relay causes the star contactor to close instantaneously and starts the timing period. When the set time delay (t) has elapsed, the star contactor returns to its initial position and the delta contactor closes, after a breaking time sufficient for the changeover.

Multifunction relays	
On-delay - Pulse on energisation contact - Symmetrical flasher	
Same functions as above +	
Off-delay - Pulse on energisation contact with externally controlled start - Symmetrical flasher	
Same functions as above +	
Star Delta starting (External control of start of the timing period is not possible for the star delta starting function).	

External control of starting: opening of an external contact connected to the relay starts the timing period. Closing of this contact resets the timer.
External control of partial stop of time delay: closing of an external contact connected to the relay allows the timing period to be interrupted. The time elapsed is memorised. Timing restarts as soon as the contact opens. This type of control enables the totalling function to be performed.
External adjustment of the time delay: one or more external potentiometers can be used for remote adjustment of the timing period or periods.

Output	Multifunction relay	See pages
Solid state	RE9-TA	2/12 and 2/13
1 C/O	RE7-TL or RE8-TA	RE7: 2/20 and 2/21, RE8: 2/38 and 2/39
2 C/O	RE7-TP	2/20 and 2/21
1 C/O	RE7-TM	2/20 and 2/21
Solid state	RE9-RA	2/12 and 2/13
1 C/O	RE7-RB11 or RE8-RB	RE7: 2/24 and 2/25, RE8: 2/38 and 2/39
2 C/O	RE7-RL	2/24 and 2/25
2 C/O	RE7-RB13	2/24 and 2/25
1 C/O	RE8-RA	2/38 and 2/39
1 C/O	RE7-RA and RE7-RM	2/24 and 2/25
2 C/O	RE7-MA13	2/22 and 2/23
1 C/O	RE7-MA11	2/22 and 2/23
1 C/O	RE7-MV	2/22 and 2/23
1 C/O	RE7-PE or RE8-PE	RE7: 2/26 and 2/27, RE8: 2/40 to 2/41
2 C/O	RE7-PP	2/26 and 2/27
1 C/O	RE8-PT	2/40 and 2/41
2 C/O	RE7-PD	2/26 and 2/27
1 C/O	RE7-PM	2/26 and 2/27
1 C/O	RE8-PD	2/40 and 2/41
1 C/O	RE7-CL or RE8-CL	RE7: 2/28 and 2/29, RE8: 2/38 and 2/39
2 C/O	RE7-CP	2/28 and 2/29
1 C/O	RE7-CV	2/28 and 2/29
1 C/O	RE8-YG	2/40 and 2/41
2 C/O	RE7-YA and RE7-YR	2/30 and 2/31
1 N/C + N/O	RE8-YA	2/40 and 2/41
Solid state	RE9-MS	2/14 and 2/15
1 C/O	RE7-ML	2/32 and 2/33
2 C/O	RE7-MY13MW	2/32 and 2/33
2 C/O	RE7-MY13BU	2/32 and 2/33

Zelio Time - timing relays

Relay output, width 22.5 mm, optimum

References :
pages 2/38 and 2/40
Dimensions :
page 2/42
Schemes, setting-up :
pages 2/39, 2/41 and 2/43

General characteristics

Presentation



2

The RE8 range of relays is designed for simple and repetitive applications, providing basic functions.

Each relay comprises:
- a single timing range,
- a C/O output relay.

These products have a transparent, hinged flap on their front face to prevent any accidental alteration of the settings. This flap can be directly sealed.

Environment

Conforming to standards			IEC 61812-1, EN 61812-1
Product approvals CE marking			CSA, GL pending, UL Zelio Time timing relays conform to European regulations relating to CE marking
Ambient air temperature around the device	Storage	°C	- 40...+ 85
	Operation	°C	- 20...+ 60
Permissible relative humidity range	Conforming to IEC 60721-3-3		15...85 % Environmental class 3K3
Vibration resistance	Conforming to IEC 6068-2-6, 10 to 55 Hz		a = 0.35 ms
Shock resistance	Conforming to IEC 6068-2-27		15 gn - 11 ms
Degree of protection	Casing		IP 50
	Terminals		IP 20
Degree of pollution	Conforming to IEC 60664-1		3
Overvoltage category	Conforming to IEC 60664-1		III
Rated insulation voltage	Conforming to IEC	V	250
	Conforming to CSA	V	300
Test voltage for insulation tests	Dielectric test	kV	2.5
	Shock wave	kV	4.8
Voltage limits	Power supply circuit		0.9...1.1 Uc
Frequency limits	Power supply circuit	Hz	50/60 ± 5 %
Disconnection value	Power supply circuit		> 0.1 Uc
Mounting position without derating	In relation to normal vertical mounting plane		Any position
Connection maximum c.s.a.	Flexible cable without cable end	mm ²	2 x 2.5
	Flexible cable with cable end	mm ²	2 x 1.5
Tightening torque		N.m	0.6...1.1

Immunity to electromagnetic interference (EMC) (Application class 2 conforming to EN 61812-1)

Electrostatic discharge	Conforming to IEC 61000-4-2		Level 3 (6 kV contact, 8 kV air)
Electromagnetic fields	Conforming to IEC 61000-4-3		Level 3 (10 V/m)
Fast transients	Conforming to IEC 61000-4-4		Level 3 (2 kV)
Shock waves	Conforming to IEC 61000-4-5		Level 3 (2 kV)
Radiated and conducted emissions	CISPR11		Group 1 class A
	CISPR22		Class A

Consumption

Consumption			~					=				
			24 V	110 V	240 V	380 V	415 V		24 V			
			RE8-TA, RA, CL, PE, PU, PT	VA	0.7	1.8	8.5		–	–	W	0.5
			RE8-YG, RB	VA	0.9	2.5	13		–	–	W	0.5
			RE8-YA	VA	0.9	2.5	13	8	9	W	0.7	

Zelio Time - timing relays

Relay output, width 22.5 mm, optimum

References :
pages 2/38 and 2/40
Dimensions :
page 2/42
Schemes, setting-up :
pages 2/39, 2/41 and 2/43

General characteristics (continued)

Time delay characteristics

Setting accuracy	As % of the full scale value		± 20 %
Repeat accuracy			< 1 %
Influence of voltage	In the voltage range, 0.9...1.1 Un		< 2.5 %
Influence of temperature			< 0.2 %/°C
Immunity to micro-breaks		ms	3
Minimum control pulse		ms	26 (except RE8-YG: 60)
Reset time		ms	50

Output circuit characteristics

Maximum switching voltage		V	≈ 250
Mechanical durability	In millions of operating cycles		20
Current limit Ith		A	8
Rated operational limits at 70 °C Conforming to IEC 60947-5-1/1991 and VDE 0660	AC-15	A	24 V 115 V 250 V 3 3 3
	DC-13	A	2 0.2 0.1
Minimum switching capacity			12 V/10 mA
Contact material			Nickel Silver 90/10


Remote control input characteristics

Signal delivered by control input Y1 △ No galvanic insulation between this input and the power supply	No-load voltage		Supply voltage
	Switching current	mA	< 10
	Maximum distance	m	50
	Compatibility		--- 2-wire sensors with leakage current < 1 mA

a.c. load


Curve 1

Electrical durability of contacts on resistive load in millions of operating cycles

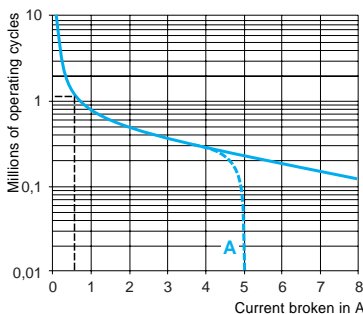


Curve 2

Reduction factor k for inductive loads (applies to values taken from the durability curve opposite)

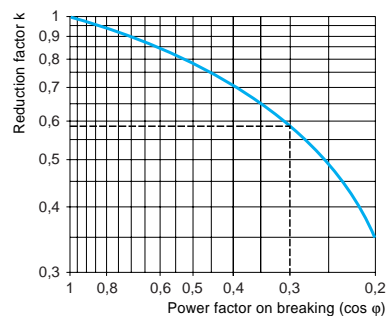

d.c. load

Load limit curve

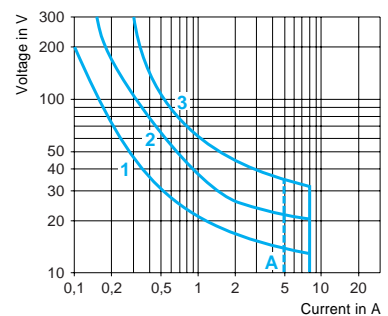

A RE8-RB●●BUTQ

Example:

An LC1-F185 contactor supplied with 115 V/50 Hz for a consumption of 55 VA or a current consumption equal to 0.1 A and $\cos \phi = 0.3$

For 0.1 A, curve 1 indicates a durability of approximately 1.5 million operating cycles. As the load is inductive, it is necessary to apply a reduction coefficient k to this number of cycles, as indicated by curve 2.


For $\cos \phi = 0.3$: $k = 0.6$

The electrical durability therefore becomes:

$1.5 \cdot 10^6 \text{ operating cycles} \times 0.6 = 900\,000 \text{ operating cycles}$

A RE8-RB●●BUTQ

- 1 L/R = 20 ms
- 2 L/R with load protection diode
- 3 Resistive load



Zelio Time - timing relays

Relay output, width 22.5 mm, optimum
On-delay, Off-delay, flashing relays


★ Available 2nd
Quarter 2001

Characteristics :
pages 2/36 and 2/37
Dimensions :
page 2/42
Schemes, setting-up :
pages 2/39 and 2/43

Functions, references

On-delay relays ☒

On-delay relay
Start on energisation
RE8-TA




Composition	Supply voltages	Quantity per pack	Timing range (1)	Reference	Weight kg
1 C/O	≈ 24 V ~ 110...240 V	10	0.1 s...3 s	RE8-TA61BUTQ	0.110
			0.1 s...10 s	RE8-TA11BUTQ (2)	0.110
			0.3 s...30 s	RE8-TA31BUTQ (2)	0.110
			3 s...300 s	RE8-TA21BUTQ (2)	0.110
			20 s...30 min.	RE8-TA41BUTQ	0.110



RE8-TA


Off-delay relays ■

Off-delay relay
With control contact
RE8-RA



Composition	Supply voltages	Quantity per pack	Timing range (1)	Reference	Weight kg
1 C/O	≈ 24 V ~ 110...240 V	10	0.1 s...10 s	RE8-RA11BTQ (2)	0.110
			0.3 s...30 s	RE8-RA31BTQ	0.110
			3 s...300 s	RE8-RA21BTQ (2)	0.110
			0.1 s...10 s	RE8-RA11FUTQ (2)	0.110
			0.3 s...30 s	RE8-RA31FUTQ	0.110
			3 s...300 s	RE8-RA21FUTQ (2)	0.110
			20 s...30 min.	RE8-RA41FUTQ	0.110

Self-powered
RE8-RB




Self-powered

1 C/O	≈ 24 V ~ 110...240 V	10	0.05 s...0.5 s	RE8-RB51BUTQ	0.110
			0.1 s...10 s	RE8-RB11BUTQ	0.110
			0.3 s...30 s	RE8-RB31BUTQ	0.110

Flashing relays ▭ ■

Symmetrical
RE8-CL



Composition	Supply voltages	Quantity per pack	Timing range (1)	Reference	Weight kg
1 C/O	≈ 24 V ~ 110...240 V	10	0.1 s...10 s	RE8-CL11BUTQ	0.110

(1) For easier adjustment, it is preferable to set the time delay between the maximum value in the range and one tenth of this value.

Example: **RE8-TA11BUTQ** timing range 0.1 s...10 s, recommended use 1 s...10 s.

(2) Also available in pack of one; delete TQ from the end of the reference. Example: **RE8-TA11BU**.

Zelio Time - timing relays


Relay output, width 22.5 mm, optimum
On-delay, Off-delay, flashing relays

Characteristics :
pages 2/36 and 2/37
References :
page 2/38
Dimensions :
page 2/42


Schemes, setting-up

Schemes


Terminal blocks RE8-TA, CL



RE8-RA




RE8-RB




2



Recommended application schemes RE8-TA, RB, CL



RE8-RA



Setting-up



1 Potentiometer for fine adjustment of the time delay, graduated in % of range max. setting 2.

2 Marking of maximum time delay value.

3 LEDs, depending on the models :
- Yellow LED: illuminates when the output relay is energised,
- Green LED: illuminates when the RE8 is energised.

Adjustment of the time delay

- The maximum value of the timing range is printed on the product, 2.

Example: RE8-TA61BUTQ; maximum time delay: 3 s.

- Time required 2.4 s; using potentiometer 1 set the value of the time delay required as a % of value 2 :

$$\text{value 1} = \frac{t \times 100}{2} = \frac{2.4 \times 100}{3} = 80$$

Zelio Time - timing relays


Relay output, width 22.5 mm
Pulse on energisation relays, relays for star-delta starters

★ Available 2nd Quarter 2001





Characteristics :
pages 2/36 and 2/37
Dimensions :
page 2/42
Schemes, setting-up :
pages 2/41 and 2/43

Functions, references

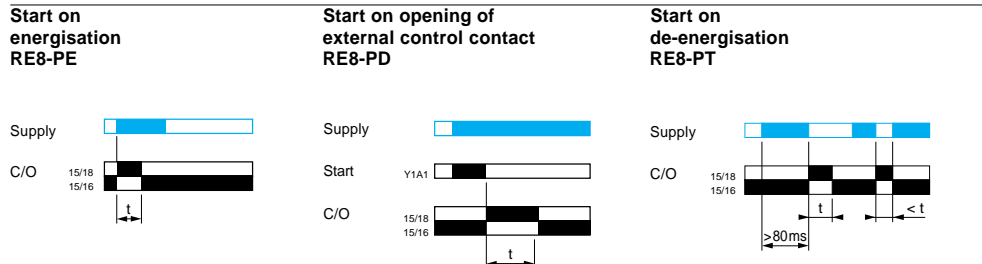Pulse on energisation relays



2

-  de-energised
-  energised
-  open
-  closed

t: pulse time







RE8-PE

Composition	Supply voltages	Quantity per pack	Timing range (1)	Reference	Weight kg
On energisation					
1 C/O	≈ 24 V ~ 110...240 V	10	0.1 s...10 s	RE8-PE11BUTQ	0.110
			0.3 s...30 s	RE8-PE31BUTQ	0.110
			3 s...300 s	RE8-PE21BUTQ	0.110
By control contact					
1 C/O	≈ 24 V	10	0.1 s...10 s	RE8-PD11BTQ	0.110
			0.3 s...30 s	RE8-PD31BTQ	0.110
			3 s...300 s	RE8-PD21BTQ	0.110
	~ 110...240 V	10	0.1 s...10 s	RE8-PD11FUTQ	0.110
			0.3 s...30 s	RE8-PD31FUTQ	0.110
			3 s...300 s	RE8-PD21FUTQ	0.110
On de-energisation					
1 C/O	≈ 24 V ~ 110...240 V	10	0.05 s...1 s	RE8-PT01BUTQ	0.110

Timing relays for star-delta starters

Timing relays for star-delta starters
With contact for switching to star connection
RE8-YG (2)

With double On-delay period
RE8-YA

 de-energised
 energised
 open
 closed
 t: adjustable time delay (star)



Composition	Supply voltages	Quantity per pack	Timing range (1)	Reference	Weight
1 C/O	≈ 24 V ~ 110...240 V	10	0.1 s...10 s	RE8-YG11BUTQ	0.110
			0.3 s...30 s	RE8-YG31BUTQ	0.110
			3 s...300 s	RE8-YG21BUTQ	0.110
1 N/C + 1 N/O	≈ 24 V ~ 110...240 V ~ 380...415 V	10	0.3 s...30 s	RE8-YA32BTQ	0.110
			0.3 s...30 s	RE8-YA32FUTQ	0.110
			0.3 s...30 s	RE8-YA32QTQ	0.110

(1) For easier adjustment, it is preferable to set the time delay between the maximum value in the range and one tenth of this value.
Example: RE8-PE11BUTQ timing range 0.1 s...10 s, recommended use 1 s...10 s.

(2) Correct operation of the star-delta starter is only possible if the wiring scheme on page 2/41 is strictly complied with.

Zelio Time - timing relays






Relay output, width 22.5 mm, optimum
Pulse on energisation relays, relays for star-delta starters

Characteristics :
pages 2/36 and 2/37
References :
page 2/40
Dimensions :
page 2/42

Schemes, setting-up



Schemes

Terminal blocks






Recommended application schemes

Pulse on energisation relays
RE8-PE, PT




Timing relays for star-delta starters

RE8-YG, RE8-YA

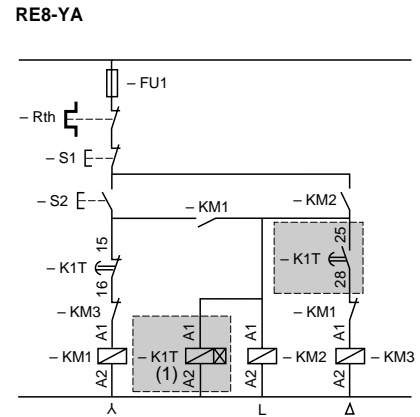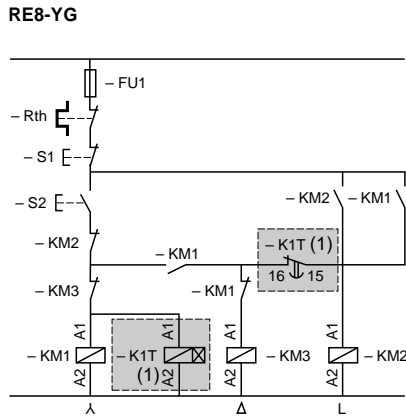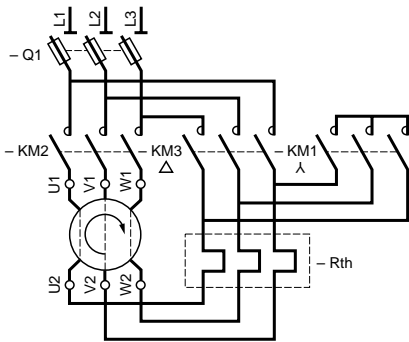

Note: Correct operation of the star-delta starter associated with the RE8-YG is only possible if the wiring scheme is strictly complied with.


Setting-up



1 Potentiometer for fine adjustment of the time delay, graduated in % of range max. setting 2.

2 Marking of maximum time delay value.

3 LEDs, depending on the models :
- Yellow LED: illuminates when the output relay is energised,
- Green LED: illuminates when the RE8 is energised.



Adjustment of the time delay

- The maximum value of the timing range is printed on the product 2.

Example: RE8-PE11BUTQ; maximum time delay: 10 s.

- Time required 2.4 s; using potentiometer 1 set the value of the time delay required as a % of value 2:

$$\text{value } 1 = \frac{t \times 100}{2} = \frac{2.4 \times 100}{10} = 24$$

Zelio Time - timing relays


Relay output, width 22.5 mm, optimum

Characteristics :
pages 2/36 and 2/37
References :
pages 2/38 and 2/40
Schemes, setting-up :
pages 2/39, 2/41 and 2/43


Dimensions, mounting

RE8 Dimensions


2

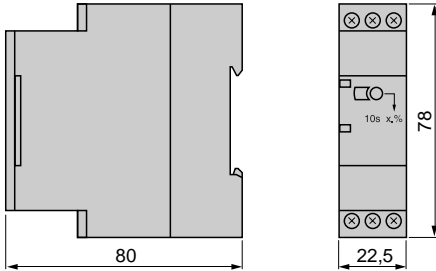

Rail mounting

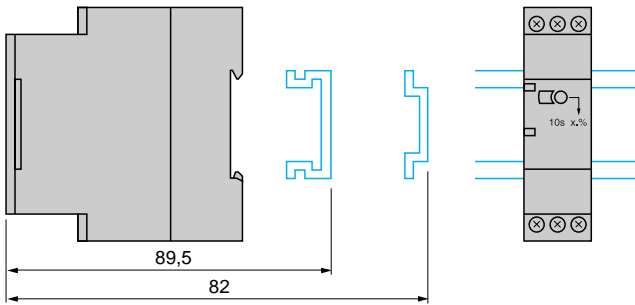

Screw fixing

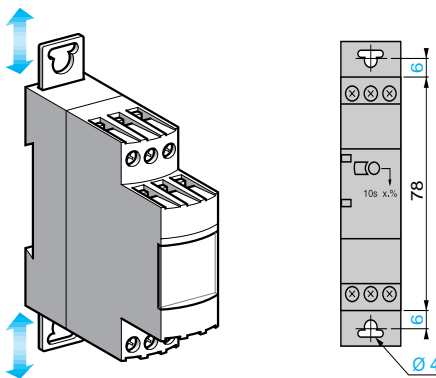


Zelio Time - timing relays

Characteristics :
pages 2/36 and 2/37
References :
pages 2/38 and 2/40
Dimensions :
page 2/42
Setting-up :
pages 2/39 and 2/41

Relay output, width 22.5 mm, optimum


Schemes

Control of several relays with a single external control contact RE8-RA, PD

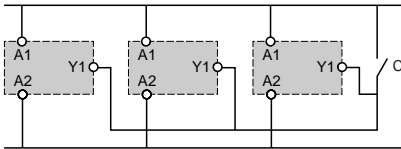

The external control contact C may be an electronic control device, for example a 2-wire sensor. In this case A1-A2 = \approx 24 V and the control device can only control up to a maximum of 4 relays.

Connection of a \approx 2-wire sensor



Leakage current (open state) $I_f < 1$ mA.