

POWER SUPPLY TRANSFORMERS




These transformers enable the Carel IR32/IRDR controllers or Tempatron TT32/TTDR timers to be supplied from 110Vac or 240Vac. They provide a low cost solution for mains operated systems and with a 3VA rating are useful for driving other low voltage monitors, alarms or control circuits that require a 12V supply.

SPECIFICATION

Input voltage:	110Vac or 240 VAC @ 50/60Hz
Input range:	+/- 10% of nominal
Output voltage:	12Vac
Regulation:	13.8Vac (0mA), 10Vac (300mA)
Max output:	3VA
Weight:	200 gms

DIMENSIONS

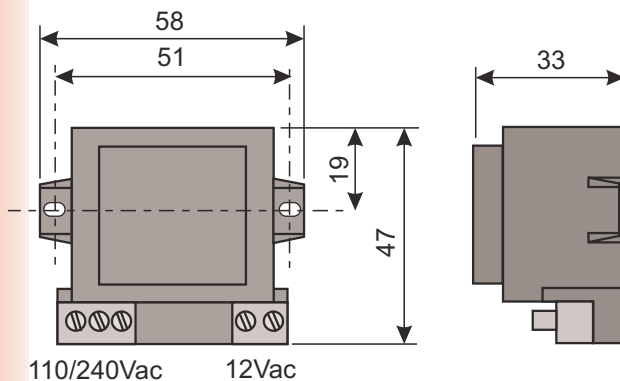

STANDARD ITEMS

Supply	Output	Part Number
240Vac	12Vac	TRA12UN100
110Vac	12Vac	TRA12UN111